10 MILLION CYCLES, CONTACTLESS HALL EFFECT TECHNOLOGY


Designated the HP7 series, these momentary pushbutton switches utilize Hall effect sensor technology for long life contactless switching, with 10 million cycles. Available in dusttight and moistureproof sealed configurations, these switches can also be watertight sealed to IP68S. The stylish dome-shaped pushbuttons are available in nine colors and a mechanical detent option is available for tactile feedback.

Case and bezel are precision-machined aluminum alloy, available with either a black or clear coat anodized finish. Three case and button styles are offered in raised dome, flush dome and exposed dome styles. PC pins or wire leads are standard, with value-added connectors available.

This rugged switch is designed to withstand harsh environments while being subjected to high rates of actuation. Applications that require repeated "jogging" and other continuous operations are prime applications for the HP7 Hall effect switch. Examples can be found in material handling equipment such as loaders, lift trucks, bucket and shovel, and other applications where positioning of the load is critical.

Features:

- 10 million cycles
- Hall effect technology for long life
- Electronics sealed to IP64 or watertight to IP68S
- Stylish dome-shaped buttons in 9 colors
- Momentary action
- Choice of termination styles
- Mechanical detent available for tactile feedback
- RoHS compliant




.713

.628



Standard Characteri	sucs/naunys.		
MECHANICAL:			
Mechanical Life:	10,000,000 cycles without detent		
Button Travel:	0.080 inches max		
Overtravel:	0.010 inches min		
Operating Force:	Without detent: 16 oz +/- 8 oz With detent: 28 oz +/- 8 oz		
Operating Point:	0.040 inches +/- 0.010		
Electrical Life:	10,000,000 cycles		
ELECTRICAL RATINGS:	Rated at Vcc = 5V @	25°C Load = 1mA	(4.7ΚΩ)
Electrical	Units	Min	Max
Supply Voltage	VDC	3.0	24
Reverse Output Voltage	VDC	N/A	0.5
Supply Current	mA	N/A	9
Continuous Output Curre	nt mA	N/A	18
Reverse Battery Protecti	on VDC	N/A	-15
ELECTRONICS:			
Seal:	IP64 or IP68S		
ENVIRONMENTAL:			
Operating Temp Range:	-40°C to +85°C		
Storage Temp Range:	-60°C to +105°C		
MATERIALS:			
Button:	Thermoplastic		
Case:	Aluminum alloy		
Mounting Hardware:	Hex nut & lockwasher		

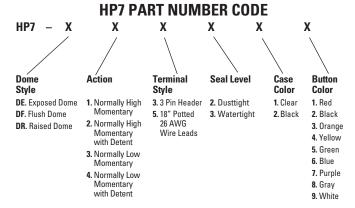

C - Flush Dome

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

HP7-DF15321 HP7-DF15322 HP7-DR15321 HP7-DR15321 HP7-DE13224 HP7-DE13321 HP7-DE13321 HP7-DE13321 HP7-DE13321 HP7-DE15322 HP7-DE15322 HP7-DE15322 HP7-DE15322 HP7-DE15322 HP7-DE15322 HP7-DE15323 HP7-DE25325 HP7-DE25325 HP7-DE25329 HP7-DE35222 HP7-DE35311 HP7-DE45215 HP7-DE45221 HP7-DE45321 HP7-DE45322 HP7-DE45325 HP7-DE45325 HP7-DE45329 HP7-DF13221 HP7-DF13222 HP7-DF13222 HP7-DF13222 HP7-DF13322 HP7-DF13322 HP7-DF15312 HP7-DF33322 HP7-DF33321 HP7-DF33322 HP7-DF33324 HP7-DF33322 HP7-DF33324 HP7-DF33322 HP7-DF33322 HP7-DF33322 HP7-DF33322 HP7-DF33323 HP7-D