

CHARACTERISTICS PER MIL-S-8805/110

ELECTRICAL:

LOW LEVEL RATINGS PER MIL-S-8805
10 MILLIAMPERES @ 30 MILLIVOLTS
MAX. D.C. OR PEAK A.C.

ELECTRICAL LIFE: 25,000 CYCLES

MECHANICAL:


MECHANICAL LIFE: 100,000 CYCLES
TOTAL TRAVEL: .080 MAX.
OPERATE FORCE: 27±8 OZS.
TOTAL TRAVEL: .080 MAX.
ENCLOSURE DESIGN: DESIGN 3
(WATERPROOF)
BEZEL: ANODIZED ALUMINUM ALLOY (SEE CHART)
BUTTON: NYLON (SEE CHART)
MARK: P7-33-2- (SEE CHART)
& DATE CODE (YYWW)

NOTE:

MOUNTING HARDWARE:
MS25082-B21 HEX NUT
MS35333-136 LOCKWASHER
AND PANEL SEAL GASKET


△ "OTTO 21649" NEEDS TO BE ADDED
ON CIRCUIT STYLES 3,4,&5

PART NUMBER CODE

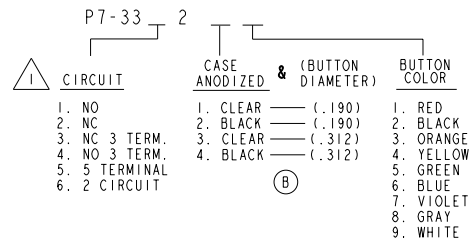

P7-33-2--

REV	OCN #	DATE	APR
A	874802	11 DEC 87	ES
B	007778	27 FEB 01	DR

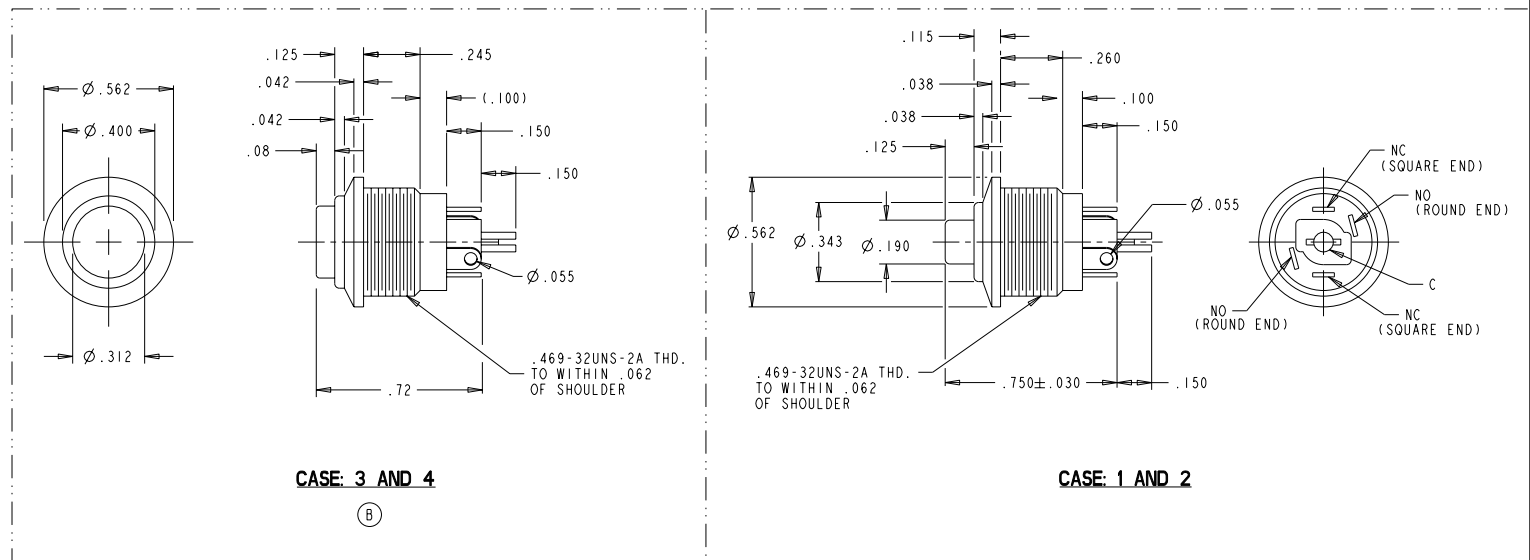

CASE: 3 AND 4

(B)

CASE: 1 AND 2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: .XX ±.03 .XXX ±.010 ANGLES ±2° DO NOT SCALE		OTTO CONTROLS DIVISION OF OTTO ENGINEERING INC. CARPENTERSVILLE, ILLINOIS USA		DESCRIPTION MINI SNAP-ACTION SWITCH					
☒ MAJOR ☐ CRITICAL ☐ SPC CRITICAL	THIRD ANGLE PROJECTION	THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF OTTO ENGINEERING, INC.. IT IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF OTTO ENGINEERING, INC..		DRWN. BDS	SIZE	FSCM NO	DRAWING NO.	REV.	
				CHKD. REO	B	21649	P7-33-2--	B	
				APPD. DR	DATE	27 FEB 01	WT.	Scale 2:1	Sheet 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[OTTO:](#)

[P7-334249](#)