

FINGER JOYSTICK WITH PUSHBUTTON OPTION

HTLT
HALL EFFECT
FINGER JOYSTICK

3 MILLION CYCLE MECHANICAL LIFE, PUSHBUTTON OPTION



HTLT4 with
Center Pushbutton

OTTO's HTLT Series miniature Hall effect joystick is a proportional linear output finger joystick with a pushbutton option. With a lower base price than the HTL, the HTLT features 6 different button styles, multiple output configurations and 3 mounting options including top mount with threaded housing.

Gating options include omnidirectional square on axis guided feel, gated single axis return to center, gated dual axis return to center and omnidirectional round smooth feel. The HTLT offers excellent tactile feedback and is available with a mechanical seal of either dusttight or watertight per IP68S. All electronics are sealed to IP68S.

Featuring contactless Hall effect technology, the HTLT is designed to withstand harsh environments and works well in the industrial, medical, unmanned vehicle and off-highway industries for applications such as remote controls, armrest integration, control panels and belly boxes.

Features:

- One/two axis gated or 360°
- Pushbutton option
- Electronics sealed to IP68S
- Dusttight or Watertight per IP68S
- 3.3V SPI output option
- Single or redundant analog output options
- PWM output option
- 3 million cycle mechanical life
- Tested for harsh environments
- Great for industrial, medical, unmanned vehicle and off-highway industries

Standard Characteristics/Ratings:

ELECTRICAL RATINGS:

Joystick: Rated at Vcc = 5V @ 20°C Load = 1mA (4.7KΩ)

Electrical	Units	Min	Typ	Max
Supply Voltage	VDC	4.50	5.00	5.50
Output Voltage Tolerance at Center	VDC @ 5V Vcc	-.25	N/A	+.25
Output Voltage Tolerance at Full Travel	VDC @ 5V Vcc	-.25	N/A	+.25
Supply Current Outputs "AA" & "DD" B=0, Vcc=5V, Io=0	mA	N/A	10.00	12.00
Supply Current Outputs "BB", "CC", "EE", "FF", "GG" & "HH" B=0, Vcc=5V, Io=0	mA	N/A	20.00	24.00
Output Impedance	kΩ	N/A	1.00	N/A

Pushbutton Circuit: Normally Open Logic Level

MECHANICAL RATINGS

Joystick: Mechanical Life All Directions 3,000,000 Cycles

Mechanical	Units	Min	Typ	Max
Travel Angle	Degrees	19.0	20.0	21.0
Over Travel Angle	Degrees	0.5	1.0	1.5
Operating Force (w/ Boot) at Top of Button, @ 20° C	OZ	5.0	8.0	16.0
Max Allowable Vertical Force on Button	LBS	N/A	N/A	25.0
Max Allowable Radial Force on Top of Knob	LBS	N/A	N/A	25.0
Max Allowable Torque on Button About Shaft Axis	IN-LBS	N/A	N/A	5.5

Pushbutton:

Mechanical Life	3,000,000 Cycles
Operating Force @ 20° C	OZ 6.0 8.0 10.0

ENVIRONMENTAL:

Operating Temperature:	° C	-40	20	85
------------------------	-----	-----	----	----

Joystick:

Electronics Seal	ISO 20653, Dusttight or watertight per IP68S
Drop	1 Meter Max. to Concrete
EMI/RFI Withstand	Per SAE J1113, Contact Factory for Details

Pushbutton:

Seal	ISO 20653, Dusttight or watertight per IP68S
------	--

ELECTRONICS

Seal Integrity:	Electronics IP68S
-----------------	-------------------

MATERIALS:

Housing:	Thermoplastic, black
Button:	Thermoplastic, black
Flange:	Thermoplastic, black
Bellows:	Silicone, black
Pushbutton Wires:	24 AWG

Mounting Hardware: 1-27 Hex nut (.09 Thick) included (with threaded base) Recommended max torque = 7 IN-LBS. or 4x #4-40 x .38 screws with square mounting flange

3 MILLION CYCLE MECHANICAL LIFE, PUSHBUTTON OPTION

HTLT2 PART NUMBER CODE

HTLT2	-	X	X	X	X	X	XX	X	X	
Button Style	Case Style	Seal*	Travel	Gating	Operating Force	Output 1 ①	Output 2 ②	Termination	Button Color	
1. Castle	1. 1-27 Thread	1. Dusttight	1. 20°	1. Single Axis Return to Center	1. 16 oz	AA. 2.5 +/- 2.0VDC	NONE	1. Wire Leads 22 AWG UL 1569***	2. Black	
2. External Castle Boot	2. 1" Smooth	2. Watertight**				BB. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	2. Wire Leads 24 AWG SAE AS22759***		
3. Short Double Stadium						CC. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC			
4. Tall Concave Stadium						DD. 2.5 +/- 1.5VDC	NONE			
5. External Bat Handle Boot						EE. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC			
6. External Smooth Boot						FF. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC			
8. External Castle Boot with Pushbutton						GG. 0.5 - 4.5VDC	0.5 - 4.5VDC			
						HH. 1.0 - 4.0VDC	1.0 - 4.0VDC			
						JJ. SPI, 3.3V Supply	None			
						KK. SPI, 5V Supply	None			

* Electronics sealed to IP68S.

** Watertight panel sealed option available with button styles 2, 5, 6 and 8.

*** Pushbutton wire leads are 24 AWG, SAE AS22759.

① Outputs are from the center to the full travel position in each direction. Options "AA", "BB", "CC", "DD", "EE" and "FF" provide increased voltage in +Y and decreasing voltage in -Y. Direction from one output per axis. Options "GG" and "HH" provide increasing voltages in all directions (+Y -Y) from 2 outputs per axis.

② Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

HTLT4 PART NUMBER CODE

HTLT4	-	X	X	X	X	X	XX	X	X	
Button Style	Case Style	Seal*	Travel	Gating	Operating Force	Output 1 ①	Output 2 ②	Termination	Button Color	
1. Castle	1. 1-27 thread	1. Dusttight	1. 20°	1. Omnidirectional; Square on Axis Guided Feel	1. 16 oz	AA. 2.5 +/- 2.0VDC	NONE	1. Wire Leads 22 AWG UL 1569***	2. Black	
2. External Castle Boot	2. 1" smooth	2. Watertight**		2. Gated; Two Axis Return to Center		BB. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC	2. Wire Leads 24 AWG SAE AS22759***		
3. Short Double Stadium				3. Omnidirectional; Square; Smooth Feel		CC. 2.5 +/- 2.0VDC	2.5 +/- 2.0VDC			
4. Tall Concave Stadium						DD. 2.5 +/- 1.5VDC	NONE			
5. External Bat Handle Boot						EE. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC			
6. External Smooth Boot						FF. 2.5 +/- 1.5VDC	2.5 +/- 1.5VDC			
8. External Castle Boot with Pushbutton						GG. 0.5 - 4.5VDC	0.5 - 4.5VDC			
						HH. 1.0 - 4.0VDC	1.0 - 4.0VDC			
						JJ. SPI, 3.3V Supply	None			
						KK. SPI, 5V Supply	None			

* Electronics sealed to IP68S.


** Watertight panel sealed option available with button styles 2, 5, 6 and 8.

*** Pushbutton wire leads are 24 AWG, SAE AS22759.

① Outputs are from the center to the full travel position in each direction. Options "AA", "BB", "CC", "DD", "EE" and "FF" provide increased voltage in +X, +Y and decreasing voltage in -X, -Y. Direction from one output per axis. Options "GG" and "HH" provide increasing voltages in all directions (+X, +Y, -X, -Y) from 2 outputs per axis.

② Options "BB" and "EE" provide redundant output 2 which duplicates output 1. Options "CC" and "FF" provide redundant output 2 which is inverse of output 1.

Button Style Configurations

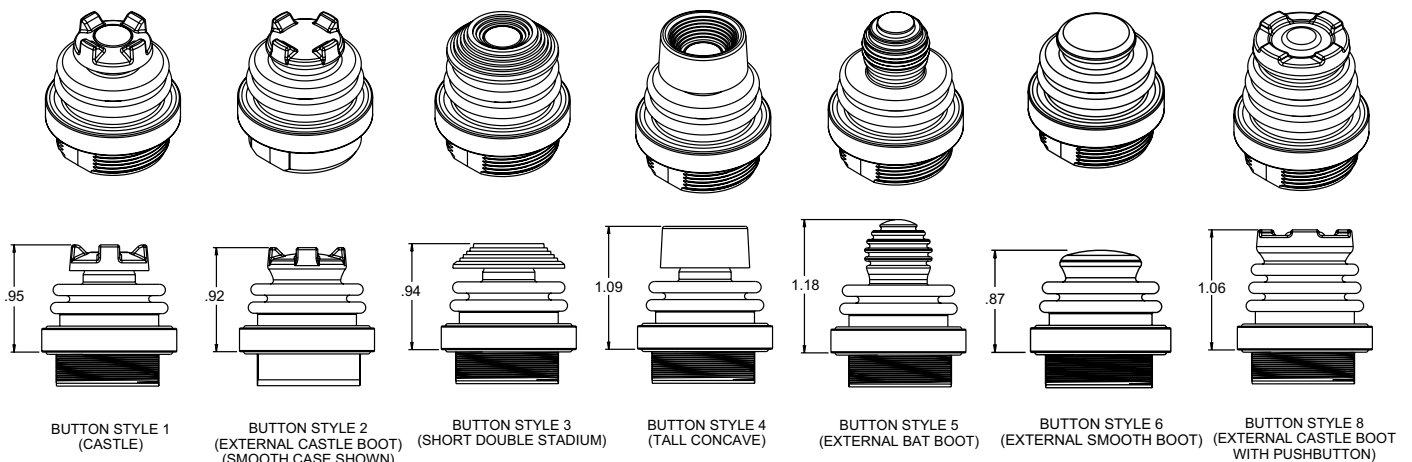


FINGER JOYSTICK WITH PUSHBUTTON OPTION


HTLT
HALL EFFECT
FINGER JOYSTICK

3 MILLION CYCLE MECHANICAL LIFE, PUSHBUTTON OPTION


HTLT2

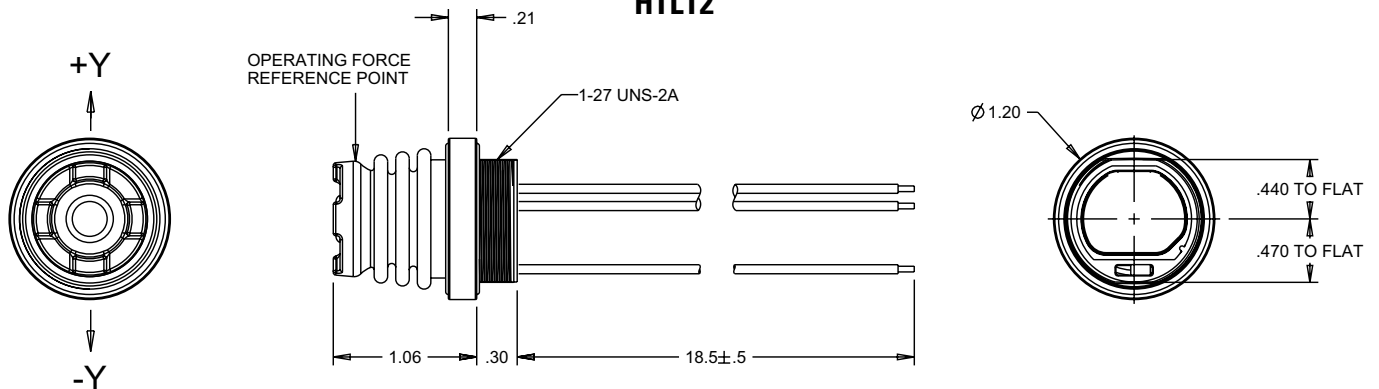

HTLT4

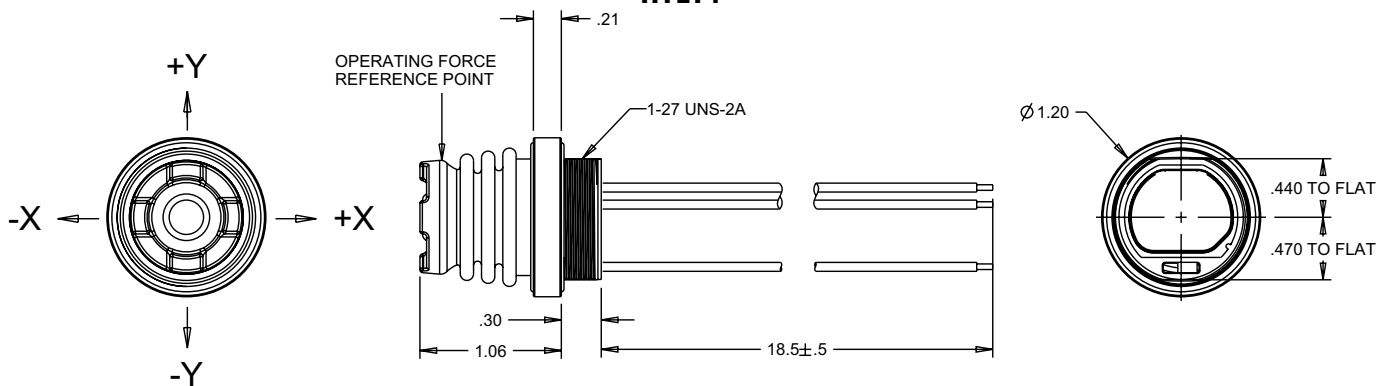


HTLT2 and HTLT4 Panel Footprint

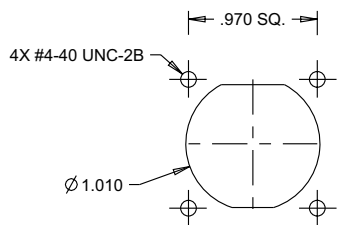

SUGGESTED PANEL OPENING
WHEN USING FLANGE AND SCREWS.


MAX. PANEL THICKNESS OF 0.125
FOR BOTTOM MOUNT

MIN. PANEL THICKNESS OF .100
FOR TOP MOUNT

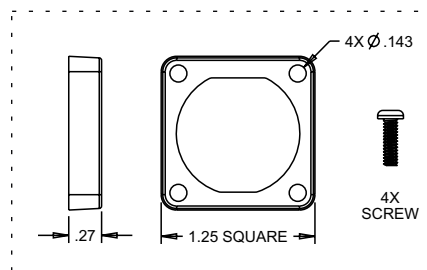


1" SMOOTH CASE STYLE HARDWARE
SHIPPED UNASSEMBLED

OR

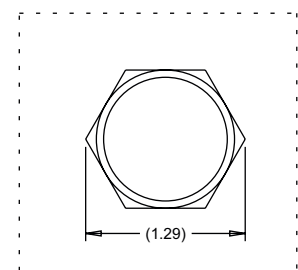

1-27 THREAD CASE STYLE HARDWARE
SHIPPED UNASSEMBLED

HTLT4 Gating Icons

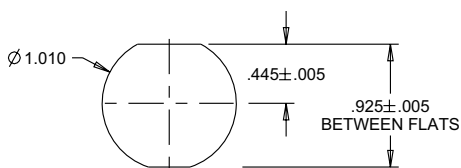


SUGGESTED PANEL OPENING
WHEN USING 1-27 NUT.


MAX. PANEL THICKNESS OF 0.125



Omni-directional;
Square On-Axis
Guided Feel
(defined by shading)



Gated;
Two Axis
Return to Center




Omni-directional;
Square;
Smooth Feel


3 MILLION CYCLE MECHANICAL LIFE, PUSHBUTTON OPTION

HTLT2


OPTION AA

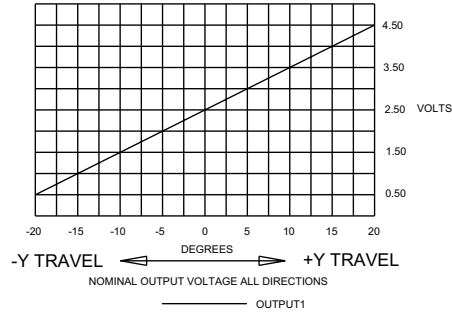


OPTION BB

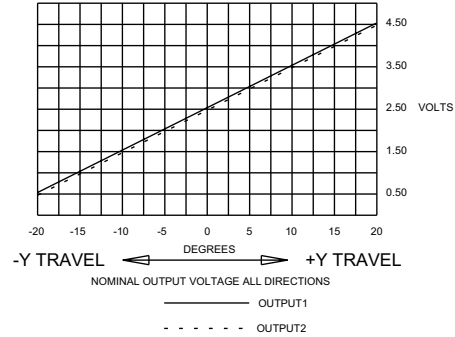


OPTION CC

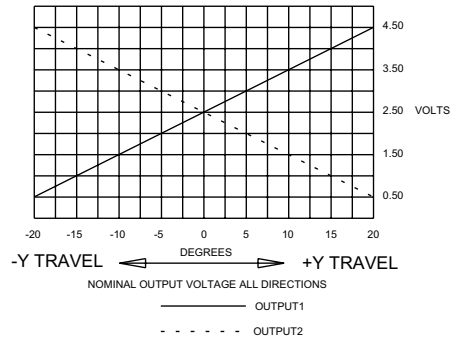


OPTION DD

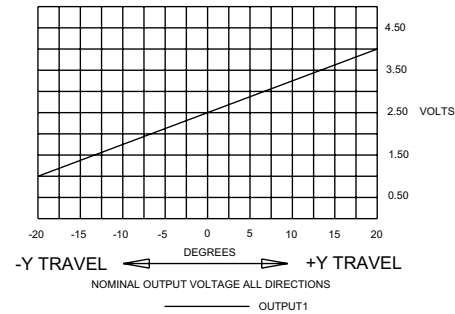


OPTION EE

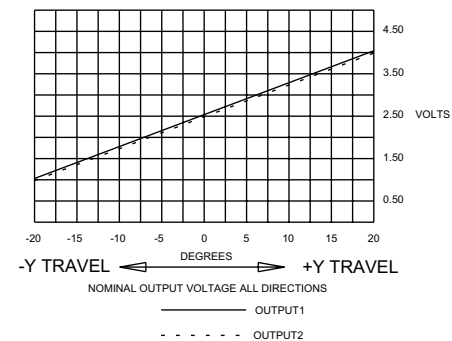


OPTION FF

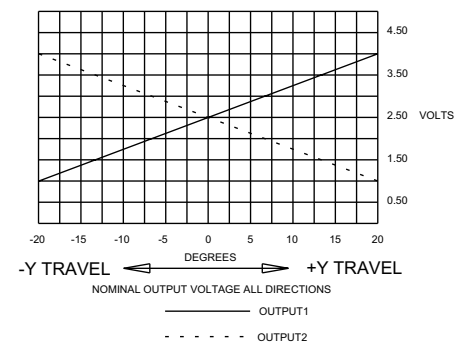

OPTION GG

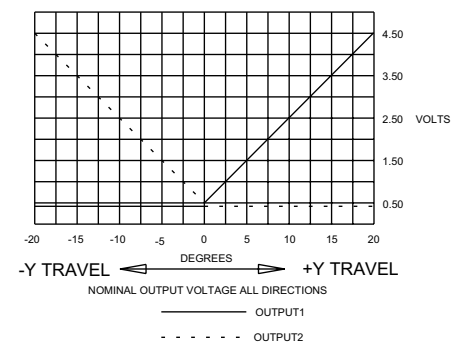

OPTION HH

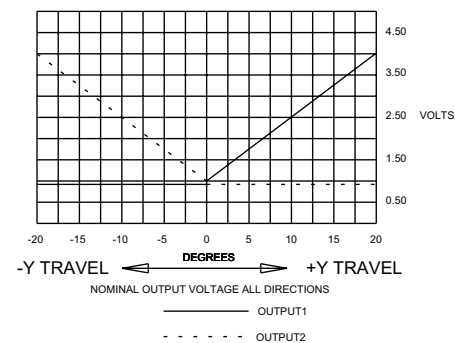

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

[HTLT2-612111AA12](#)