ΞΔ°

ATTRACTIVE & RUGGED FOR WET & DUSTY ENVIRONMENTS


The rugged P5-D switch is an alternate action "push on, push off" pushbutton switch with contoured dome styling. With two design versions, a flush dome and raised dome button profile, the P5-D offers excellent mechanical and electrical performance while operating under severe conditions found in demanding applications.


The P5-D features unsealed, dusttight, moistureproof and watertight seal options. A mechanical life of one million cycles, 25,000 cycles at full load.

The P5-D is a quality precision, snap-action switch designed for use in panels, instruments and other demanding applications where attractive, rugged pushbutton switches are required.


Features:

- 2 contoured button styles
- Button sealed with patented "rolling sleeve" principle
- **Contact area sealed at case & terminals**
- Handles logic level up to 5 amps
- Moistureproof & dusttight to IP64 & MIL-PRF-8805 Design 2 or watertight to IP68S options
- Unsealed construction also available
- **RoHS compliant**

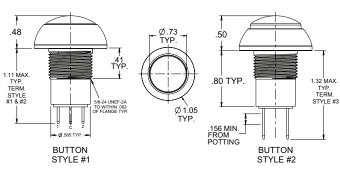



SERIES






Raised Dome

Standard Characteristics/Ratings:

ELECTRICAL RATINGS:	
Load	Sea Level @ 28VDC or 115VAC
Resistive	5A
Inductive	3A
Lamp	1A
Motor	3A
DWV	1000Vrms
Logic Level	10mA @ 5VDC
Electrical Life:	25,000 cycles at full load
Mechanical Life:	1,000,000 cycles
Seal:	Unsealed, IP64 & MIL-PRF-8805 Design 2 or IP68S
Operating Temp Range:	-40°C to +85°C
Operating Force:	3.0 lbs. +1/-0.5 lb.
Total Travel:	0.180 inches max
Overtravel:	0.012 inches min
MATERIALS:	
Case:	Anodized aluminum alloy
Button:	Thermoplastic
Terminals:	Brass with gold over silver
Terminal Hardware:	Screws, lockwashers and terminal lugs for screw terminal option
Mounting Hardware:	Hex nut, lockwasher

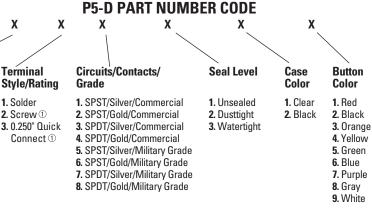

① Available on SPST circuit forms only.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

OTTO:

P5-D000023 P5-D000026 P5-D000029 P5-D000033-1 P5-D000033-2 P5-D000033-3 P5-D000036 P5-D135227