# EDM1-GOBLIN



### **Main Features**

- Develop your mobile embedded device quickly with the Goblin EDM Carrier Board which features a variety of sensors and interconnects.
- HDMI, TTL and LVDS display interfaces.
- Communication by dual PCI Express (with SIM cardslots).
- Dual CAN Bus, Dual UART, USB and 8 GPIO's for Industrial control.



Power 12 VDC	LAN	Π			2 <sup>nd</sup> LA	N	I <sup>2</sup> S 2 <sup>nd</sup>	SPDIF	CANBus	SD	SPI	UART x2	Buttons	RSVD
		LVDS	HDMI	PCle x2	SATA 1 <sup>st</sup>	USB OTG	USB Host	I <sup>2</sup> S 1 <sup>st</sup>	x2	30	x2	l <sup>2</sup> C x2	+ GPIO	RTC

## **Specifications**

**Core System** System on Module EDM Type 1 compact form factor

#### **Expansion**

Expansion Slots 2x mini-PCle + SIM cardslot (for 3G communication)

#### **I/O Interfaces**

Connector

Header

1x SATA 1x micro SD cardslot (SDIO) 2x Gigabit LAN 2x USB 3.0 Host

1x micro USB 3.0 / 2.0 OTG

1x UART (RS-232/422/485)

2x CAN Bus 1x UART (RS-232)

**GPMC** Header

Manufacturing pins

2x SPI

8x GPIO 2x I<sup>2</sup>C Video

Connector

#### Audio Codec

Connector

Speaker

#### Touch Controller

Connector

#### Sensors

3-axis Movement Light Sensor Compass Real Time Clock

#### **Power Specifications**

Input power Battery 1x HDMI 1 channel LVDS 18/24 bit RGB TTL 24 bit


Jumper selectable: Freescale SGTL5000 (I<sup>2</sup>S), TI TLV320AIC23B (I<sup>2</sup>S) 1x 3.5 mm jack Stereo Audio in 1x 3.5 mm jack Stereo Audio out 1x 3.5 mm jack Microphone S/PDIF 2W amplified speaker connectors

TSC2046 (4 wire by SPI) 4 wire touch panel

ST Microelectronics LIS331DLH Intersil ISL29023IROZ-T7 Freescale MAG3110FCR1 Maxim integrated DS1337+

12 VDC Smart battery connector

#### **Block Diagram**

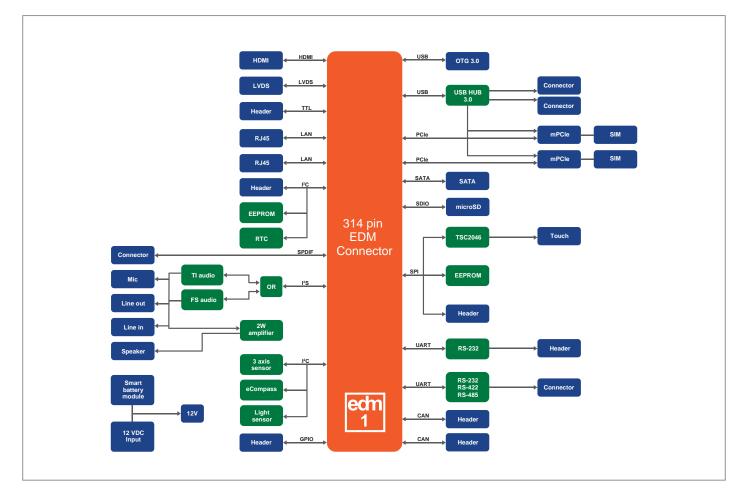

#### **Environmental and Mechanical**

Temperature Commercial : 0° to 60° C Extended : -20° to 70° C Industrial : -40° to 85° C Humidity 10 to 90% Module Connector 314 pins MXM3 Form Factor 3.5" Form Factor Dimensions 147 x 102 mm (5¾ x 4 inch) MTBF >100,000 hours Weight 115 grams Shock 50G / 25ms Vibration 20G / 0-600 Hz

#### **Ordering Information**


**EDM1-GOBLIN** 

3.5 inch form factor Goblin carrier board for EDM type 1 system-on-modules **EDM1-GOBLIN-START** Goblin EDM type 1 evaluation board including cablekit and adaptor

\* Feel free to contact us for custom tailored Carrier Board request for your projects.

#### **Dimensions**

#### (units in mm)

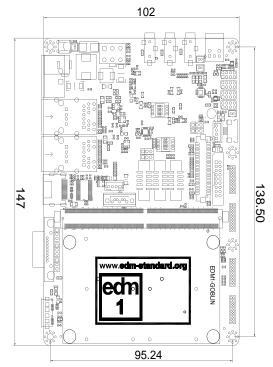

2015-05. All specifications are subject to change without notice.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TechNexion: EDM1GOBLIN