

MAX33042E

+5V, 4Mbps CAN Transceiver with ±40V Fault Protection, ±25V CMR, and ±40kV ESD in 8-Pin SOT23

General Description

The MAX33042E is a +5V CAN transceiver with integrated protection for industrial applications. This device has extended ±40V fault protection for equipment where overvoltage protection is required. It also incorporates high ±40kV ESD Human Body Model (HBM) protection and an input common-mode range (CMR) of ±25V, exceeding the ISO 11898-2 CAN standard of -2V to +7V. This makes it well suited for applications where there is moderate electrical noise that can influence the ground levels between two nodes or systems.

This device operates at a high-speed CAN data rate, allowing up to 4Mbps on short distance networks. Maximum speed on large networks may be limited by the number of nodes, the type of cabling used, stub length, and other factors. The MAX33042E includes a dominant timeout to prevent bus lockup caused by controller error or by a fault on the TXD input. When the TXD remains in the dominant state (low) for longer than t_{DOM} , the driver is switched to the recessive state, releasing the bus and allowing other nodes to communicate.

The transceiver features a STBY pin for three modes of operation; standby mode for low current consumption, normal high-speed mode, or a slow slew rate mode when an external 26.1kΩ resistor is connected between ground and the STBY pin. A shutdown pin enables the device to further save power consumption where the transmitter and receiver are turned off.

The MAX33042E is available in 8-pin SOT23 and 8-pin SOIC packages. Both packages operate over the -40°C to +125°C temperature range.

Applications


- Industrial Equipment
- Instrumentation
- Motor Control
- Building Automation

Benefits and Features

- Integrated Protection Increases Robustness
 - Increased Protection on CANH and CANL
 - ±40V Fault Tolerant
 - ±40kV ESD HBM Protection
 - ±12kV Contact and ±15kV Air-Gap ESD (ISO 10605, IEC 61000-4-2) Protection
 - ±25V Extended Common-Mode Input Range (CMR)
 - Short-Circuit Protection
 - Transmitter-Dominant Timeout Prevents Lockup
 - Thermal Shutdown
- Provides Flexible Design Options
 - Slow Slew Rate to Minimize EMI
 - Low-Current Standby Mode
 - Shutdown Pin to Save Power
- Small Package Option to Save PCB Area
 - 8-Pin SOT23
- High-Speed Operation of up to 4Mbps
- Operating Temperature Range of -40°C to +125°C

Ordering Information appears at end of data sheet.

Simplified Block Diagram

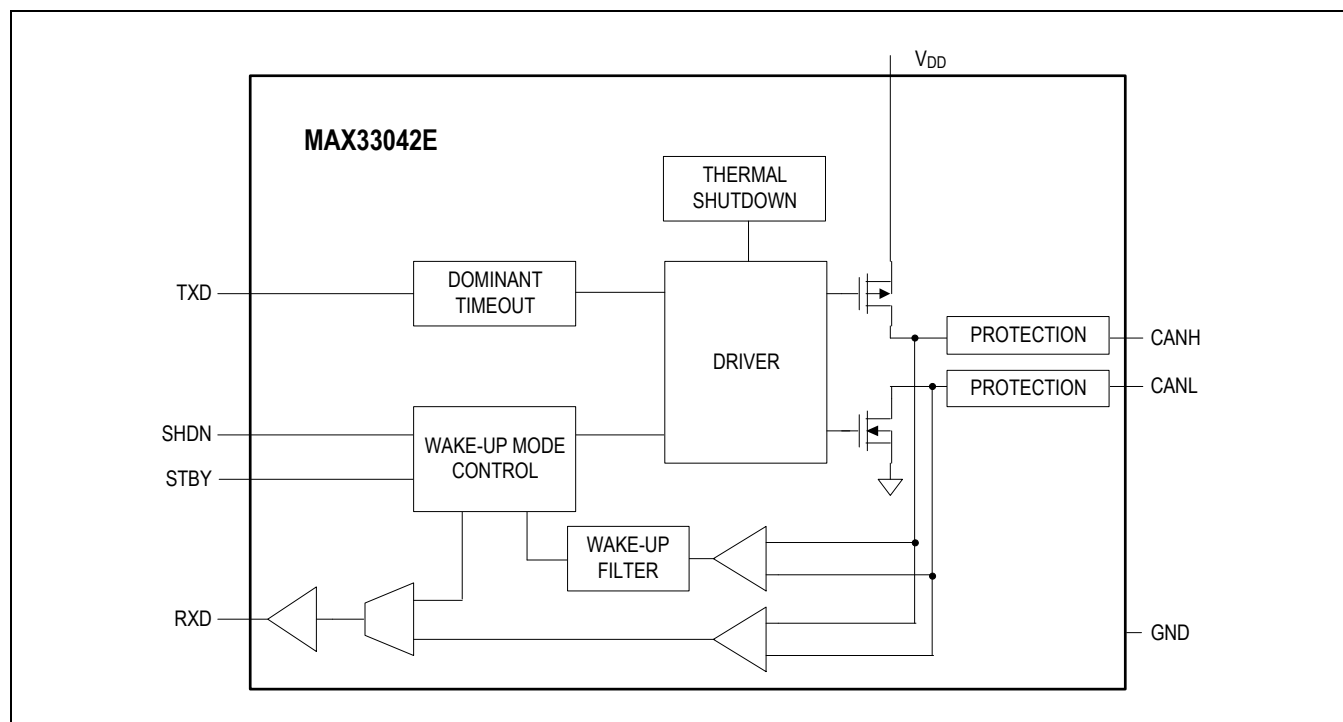

+5V, 4Mbps CAN Transceiver with ±40V Fault Protection, ±25V CMR, and ±40kV ESD in 8-Pin SOT23

MAX33042E

Absolute Maximum Ratings

| | |
|--|----------------|
| V _{DD} | -0.3V to +6.0V |
| CANH or CANL (Continuous) | -40V to +40V |
| TXD, STBY, SHDN | -0.3V to +6.0V |
| RXD | -0.3V to +6.0V |
| Short-Circuit Duration..... | Continuous |
| Continuous Power Dissipation (SOT23) | |
| Multilayer Board (T _A = +70°C, derate 9.5mW/°C above +70°C) | |
| | 761.9mW |

| | |
|--|-----------------|
| Continuous Power Dissipation (SOIC) | |
| Multilayer Board (T _A = +70°C, derate 7.4mW/°C above +70°C) | |
| | 588.2mW |
| Operating Temperature Range..... | -40°C to +125°C |
| Junction Temperature..... | +150°C |
| Storage Temperature Range | -60°C to +150°C |
| Soldering Temperature (reflow) | +260°C |
| Lead Temperature (soldering, 10s) | +300°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Information

8 SOT23

| | |
|---|-------------------------|
| Package Code | K8CN+2C |
| Outline Number | 21-0078 |
| Land Pattern Number | 90-0176 |
| Thermal Resistance, Four-Layer Board | |
| Junction to Ambient (θ _{JA}) | 105°C/W |
| Junction to Case (θ _{JC}) | 42.3°C/W |

8 SOIC

| | |
|---|-------------------------|
| Package Code | S8+2C |
| Outline Number | 21-0041 |
| Land Pattern Number | 90-0096 |
| Thermal Resistance, Four-Layer Board | |
| Junction to Ambient (θ _{JA}) | 136°C/W |
| Junction to Case (θ _{JC}) | 38°C/W |

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

(V_{DD} = 4.5V to 5.5V, R_{LD} = 60Ω, C_{LD} = 100pF, C_L = 15pF, T_A = T_{MIN} to T_{MAX}, unless otherwise specified. Typical values are at V_{DD} = 5.0V and T_A = +25°C, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------|--------|------------|-----|-----|-----|-------|
| POWER | | | | | | |

**+5V, 4Mbps CAN Transceiver with
±40V Fault Protection, ±25V CMR,
and ±40kV ESD in 8-Pin SOT23**

MAX33042E

($V_{DD} = 4.5V$ to $5.5V$, $R_{LD} = 60\Omega$, $C_{LD} = 100pF$, $C_L = 15pF$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified. Typical values are at $V_{DD} = 5.0V$ and $T_A = +25^\circ C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|----------------------|--|--|------------------------|------|------|-------|
| Supply Voltage | V _{DD} | | | 4.5 | | 5.5 | V |
| Dominant Supply Current | I _{DD_DOM} | TXD = SHDN = STBY = 0V | No load | | 5 | 9 | mA |
| | | | R _{LD} = 60Ω | | 50 | 70 | |
| Recessive Supply Current | I _{DD_REC} | V _{DD} = TXD = 5.0V, STBY = SHDN = 0V | No load | | 3 | | mA |
| | | | CANH shorted to CANL | | 3 | | |
| Shutdown Current | I _{SHDN} | SHDN = STBY = TXD = V _{DD} | | | 0.03 | 3 | μA |
| Standby Supply Current | I _{STBY} | STBY = TXD = V _{DD} | | | 45 | 70 | μA |
| UVLO Threshold Rising | V _{UVLO_R} | V _{DD} rising | | | | 4.25 | V |
| UVLO Threshold Falling | V _{UVLO_F} | V _{DD} falling | | 3.45 | | | V |
| FAULT PROTECTION | | | | | | | |
| ESD Protection (CANH, CANL to GND) | | HBM, JEDEC JS-001-2017 | | ±40 | | | kV |
| | | Air-Gap ISO 10605, IEC 61000-4-2 | | ±15 | | | |
| | | Contact ISO 10605, IEC 61000-4-2 | | ±12 | | | |
| ESD Protection (All Other Pins) | | HBM | | ±4 | | | kV |
| Fault Protection Range | V _{FP} | CANH or CANL to GND | | -40 | | +40 | V |
| Thermal Shutdown | T _{SHDN} | | | +160 | | | °C |
| Thermal Shutdown Hysteresis | T _{HYST} | | | +20 | | | °C |
| LOGIC INTERFACE (RXD, TXD, STBY, SHDN) | | | | | | | |
| Input High Voltage | V _{IH} | | | 0.7 x V _{DD} | | | V |
| Input Low Voltage | V _{IL} | TXD, SHDN | | | | 0.8 | V |
| TXD Input Pullup Resistance | R _{PU_TXD} | | | 100 | | 250 | kΩ |
| STBY Input Pullup Resistance | R _{PU_STBY} | | | 100 | | 250 | kΩ |
| Slow Slew Rate Resistor | R _{SLEW_ON} | External resistor size from STBY to ground to enable slow slew rate mode | | 26.1 | | | kΩ |
| SHDN Input Pulldown Resistance | R _{PD_SHDN} | | | 1 | | | MΩ |
| Output High Voltage | V _{OH} | Sourcing 4mA, TXD = V _{DD} | | V _{DD} - 0.4V | | | V |
| Output Low Voltage | V _{OL} | Sinking 4mA, TXD = 0V | | | | 0.4 | V |
| CAN BUS DRIVER | | | | | | | |
| Bus Output Voltage (Dominant) | V _{O_DOM} | t < t _{DOM} , TXD = 0V | CANH | 2.75 | | 4.5 | V |
| | | | CANL | 0.5 | | 2.25 | |
| Bus Output Voltage (Recessive) | V _{O_REC} | TXD = V _{DD} , no load | CANH | 2 | | 3 | V |
| | | | CANL | 2 | | 3 | |
| Bus Output Differential Voltage (Dominant) | V _{OD_DOM} | TXD = 0V | R _{CM} = 156Ω, -5V ≤ V _{CM} ≤ +10V, Figure 1 | 1.5 | | 3 | V |
| | | | R _{CM} = open | 1.5 | | 3 | |

**+5V, 4Mbps CAN Transceiver with
±40V Fault Protection, ±25V CMR,
and ±40kV ESD in 8-Pin SOT23**

MAX33042E

($V_{DD} = 4.5V$ to $5.5V$, $R_{LD} = 60\Omega$, $C_{LD} = 100pF$, $C_L = 15pF$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified. Typical values are at $V_{DD} = 5.0V$ and $T_A = +25^\circ C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|-------------------------|---|----------------------------------|------|-----|------|-------|
| Output Voltage Standby | V _{O_STBY} | TXD = STBY = V _{DD} , no load | | 70 | | 160 | mV |
| Bus Output Differential Voltage (Recessive) | V _{OD_REC} | TXD = V _{DD} | R _{LD} = 60Ω | -120 | | +12 | mV |
| | | | No load | -500 | | +50 | |
| Short-Circuit Current | I _{SC_CANH} | TXD = 0V, CANH = -40V | | | 2 | 5 | mA |
| | I _{SC_CANL} | TXD = 0V, CANL = +40V | | | 2 | 5 | |
| RECEIVER | | | | | | | |
| Common-Mode Input Range | V _{CM} | CANH or CANL to GND, RXD output valid | | -25 | | +25 | V |
| Common-Mode Input Range Standby Mode | V _{CM_STBY} | CANH or CANL to GND, RXD output valid | | -12 | | +12 | V |
| Input Differential Voltage (Dominant) | V _{ID_DOM} | -25V ≤ V _{CM} ≤ +25V, TXD = V _{DD} | | | | 0.9 | V |
| Input Differential Voltage (Recessive) | V _{ID_REC} | -25V ≤ V _{CM} ≤ +25V, TXD = V _{DD} | | 0.5 | | | V |
| Standby Input Differential Voltage (Dominant) | V _{ID_STBYDOM} | -12V ≤ V _{CM} ≤ +12V, TXD = V _{DD} | | | | 1.15 | V |
| Standby Input Differential Voltage (Recessive) | V _{ID_STBYREC} | -12V ≤ V _{CM} ≤ +12V, TXD = V _{DD} | | 0.45 | | | V |
| Input Differential Hysteresis | V _{ID_HYS} | -25V ≤ V _{CM} ≤ +25V | | | 90 | | mV |
| Input Resistance | R _{IN} | TXD = V _{DD} | | 10 | | 50 | kΩ |
| Differential Input Resistance | R _{IN_DIFF} | TXD = V _{DD} | | 20 | | 100 | kΩ |
| Input Capacitance | C _{IN} | TXD = V _{DD} (Note 2) | | | 18 | 35 | pF |
| Differential Input Capacitance | C _{IN_DIFF} | TXD = V _{DD} (Note 2) | | | 9 | 18 | pF |
| Input Leakage Current | I _{LKG} | V _{DD} = 0V, CANH = CANL = 5.0V | | | 150 | 250 | μA |
| SWITCHING | | | | | | | |
| Driver Rise Time | t _R | R _{CM} = open, Figure 1 | V _{STBY} = 0V | | 5 | | ns |
| | | | 26.1kΩ resistor from STBY to GND | | 40 | | |
| Driver Fall Time | t _F | R _{CM} = open, Figure 1 | V _{STBY} = 0V | | 10 | | ns |
| | | | 26.1kΩ resistor from STBY to GND | | 80 | | |
| TXD to RXD Loop Delay | t _{LOOP} | STBY = 0V | Dominant to Recessive, Figure 2 | | 60 | 100 | ns |
| | | | Recessive to Dominant, Figure 2 | | 60 | 100 | |
| TXD Propagation Delay (Recessive to Dominant) | t _{ONTXD} | V _{DD} = 5V, R _{CM} is open, Figure 1 | | | 25 | 50 | ns |
| TXD Propagation Delay (Dominant to Recessive) | t _{OFFTXD} | V _{DD} = 5V, R _{CM} is open, Figure 1 | | | 25 | 50 | ns |

**+5V, 4Mbps CAN Transceiver with
±40V Fault Protection, ±25V CMR,
and ±40kV ESD in 8-Pin SOT23**

MAX33042E

($V_{DD} = 4.5V$ to $5.5V$, $R_{LD} = 60\Omega$, $C_{LD} = 100pF$, $C_L = 15pF$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise specified. Typical values are at $V_{DD} = 5.0V$ and $T_A = +25^\circ C$, unless otherwise specified.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-----------------|----------------------------|-----|-----|-----|---------|
| RXD Propagation Delay (Recessive to Dominant) | t_{ONRXD} | $V_{DD} = 5V$, Figure 3 | | 40 | 70 | ns |
| RXD Propagation Delay (Dominant to Recessive) | t_{OFFRXD} | $V_{DD} = 5V$, Figure 3 | | 30 | 70 | ns |
| TXD-Dominant Timeout | t_{DOM} | Figure 4 | 1.3 | | 4.3 | ms |
| Wake-Up Time | t_{WAKE} | Figure 5 | | 2 | | μs |
| Standby Propagation Delay (Dominant to Recessive) | t_{PLH_STBY} | $STBY = V_{DD}$, Figure 5 | | 350 | | ns |
| Standby to Normal Mode Delay | t_{D_STBYN} | $C_L = 15pF$, Figure 6 | | 20 | | μs |
| Normal to Standby Dominant Delay | t_{D_NSTBY} | $C_L = 15pF$, Figure 6 | | 35 | | μs |
| Shutdown to Normal Delay | t_{D_SHDNN} | $C_L = 15pF$, Figure 7 | | 25 | | μs |

Note 1: All units are 100% production tested at $T_A = +25^\circ C$. Specifications over temperature are guaranteed by design.

Note 2: Not production tested. Guaranteed at $T_A = +25^\circ C$.

Timing Diagrams

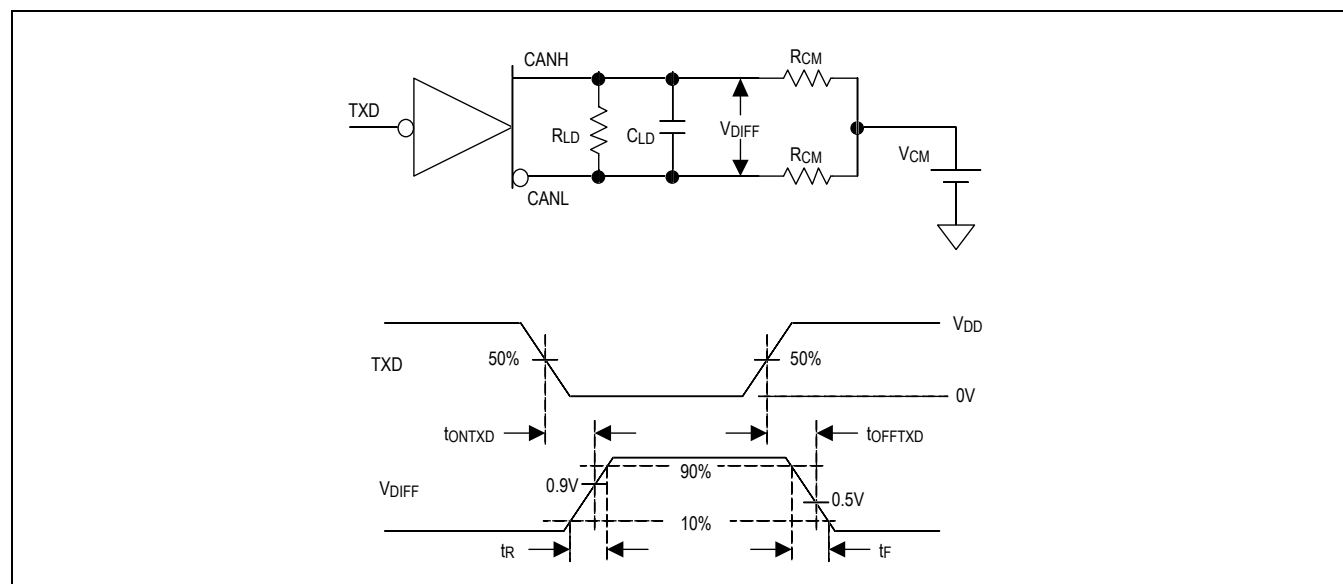


Figure 1. Transmitter Test Circuit and Timing Diagram

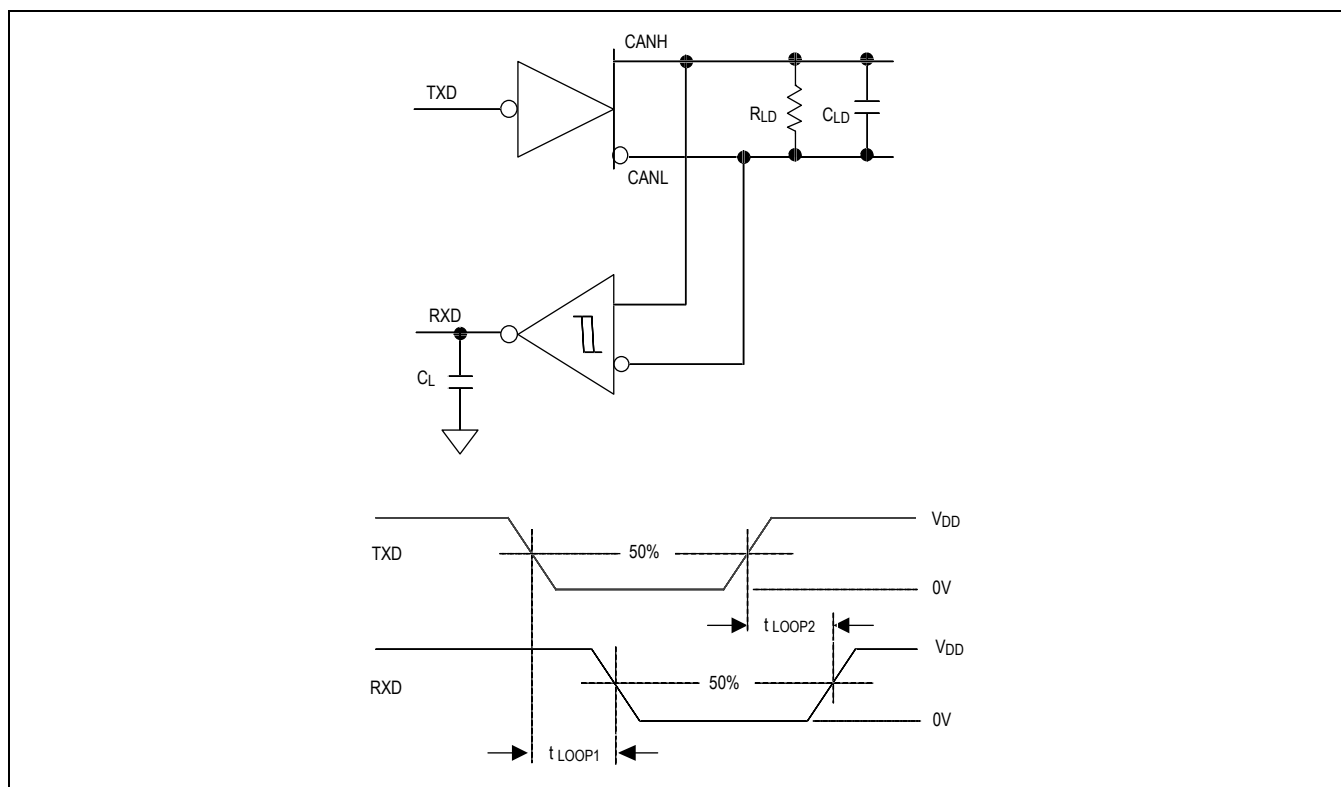


Figure 2. TXD to RXD Loop Delay

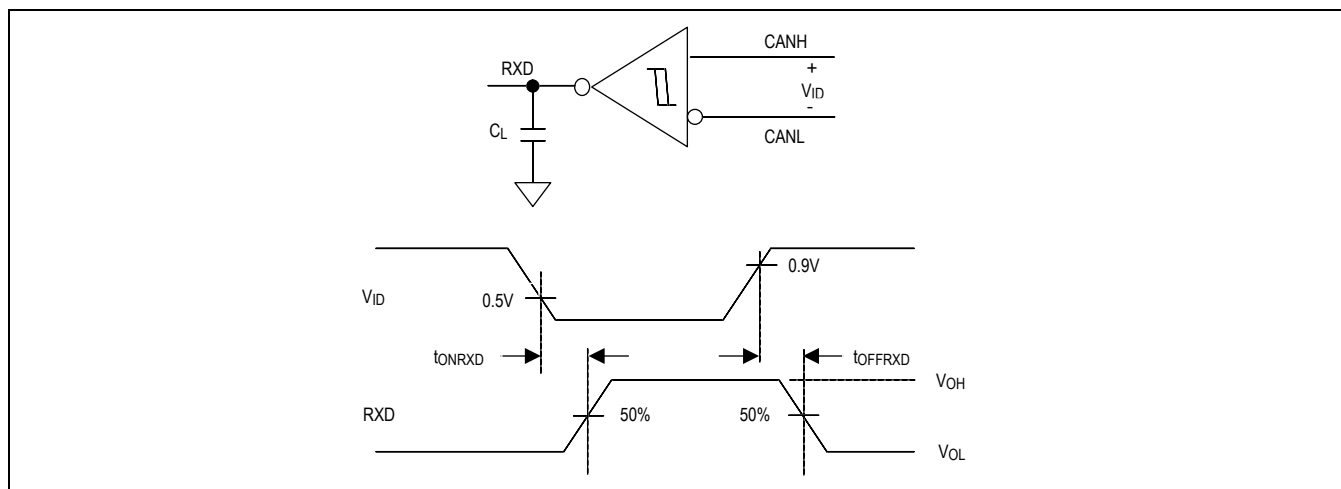


Figure 3. RXD Timing Diagram

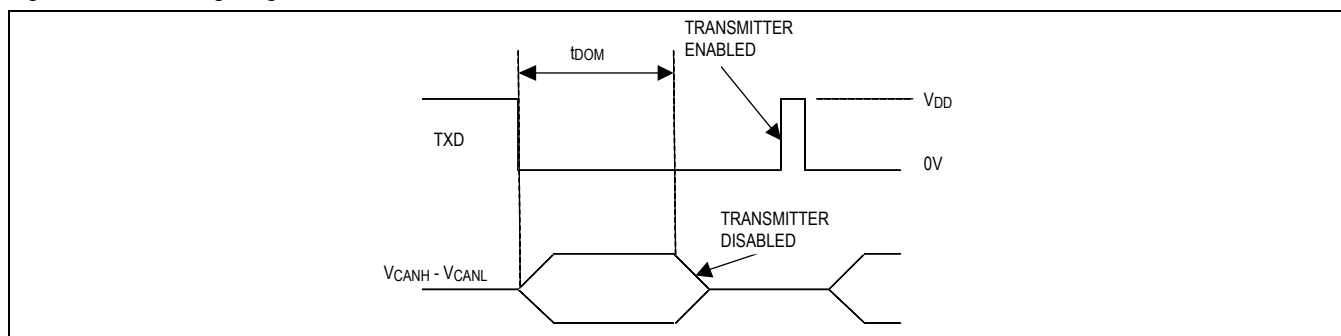


Figure 4. Transmitter-Dominant Timeout Timing Diagram

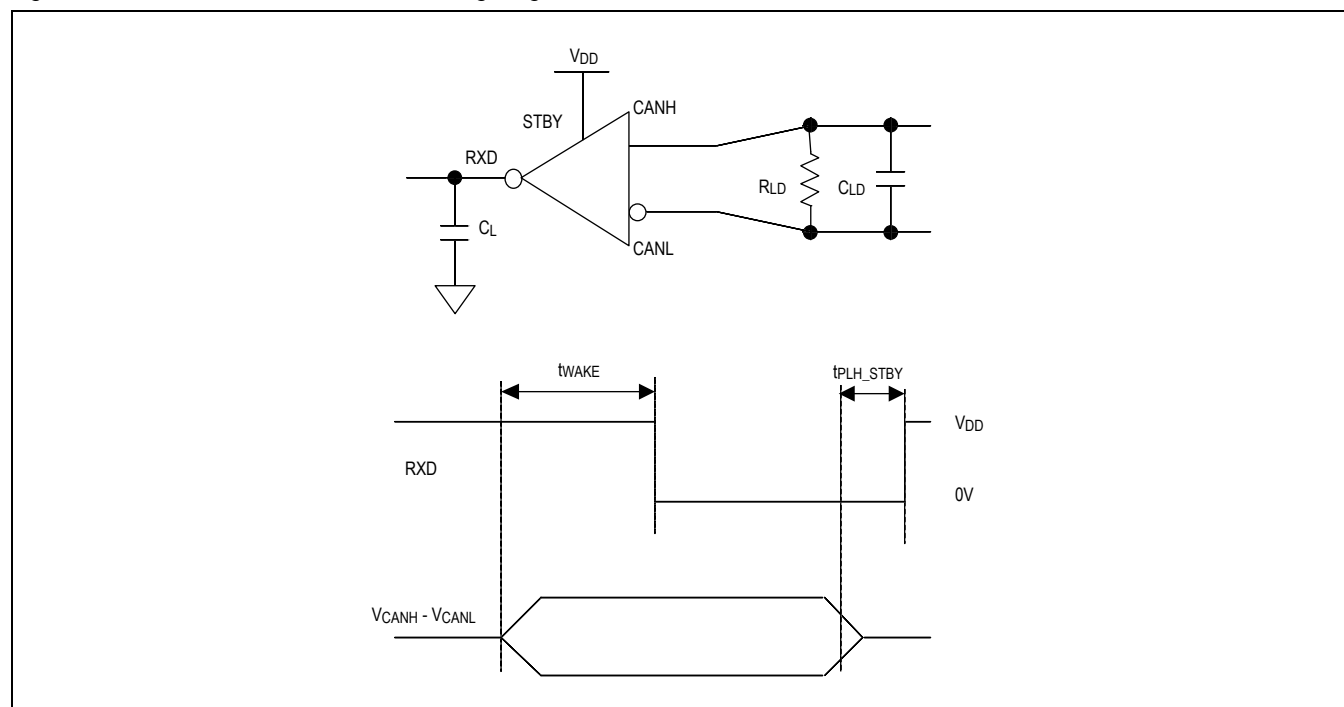


Figure 5. Standby Receiver Propagation Delay

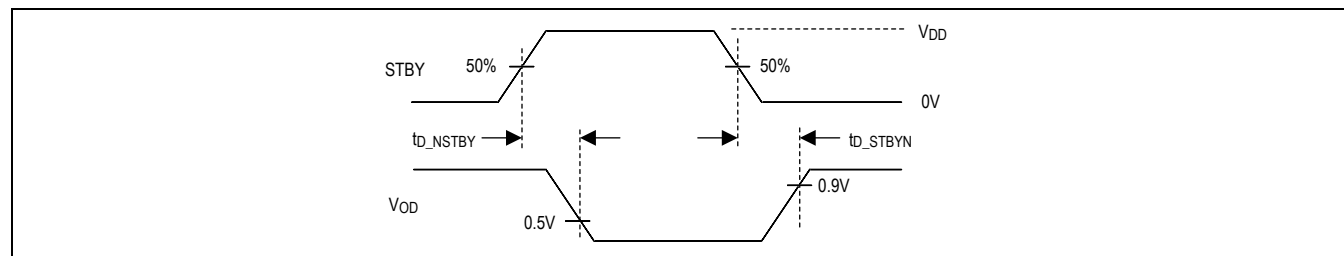


Figure 6. Standby Mode Timing Diagram

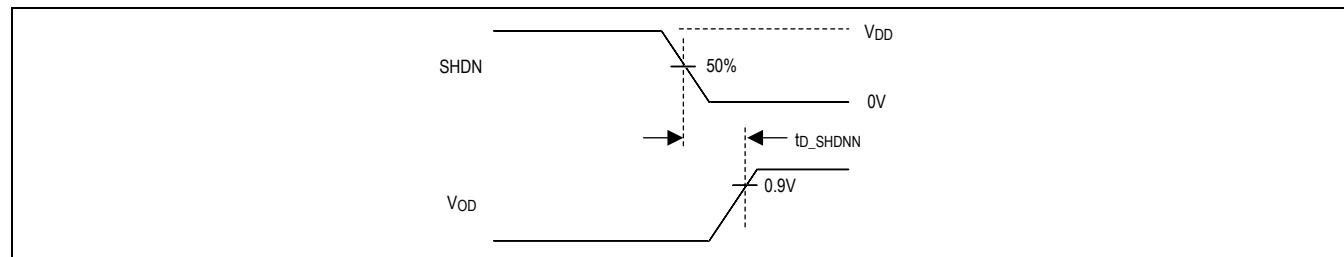











Figure 7. Shutdown Mode Timing Diagram

+5V, 4Mbps CAN Transceiver with ±40V Fault Protection, ±25V CMR, and ±40kV ESD in 8-Pin SOT23

MAX33042E

Typical Operating Characteristics


$V_{DD} = 5V$, $R_{LD} = 60\Omega$, $C_{LD} = 100pF$, $C_L = 15pF$, $T_A = +25^\circ C$, unless otherwise noted.

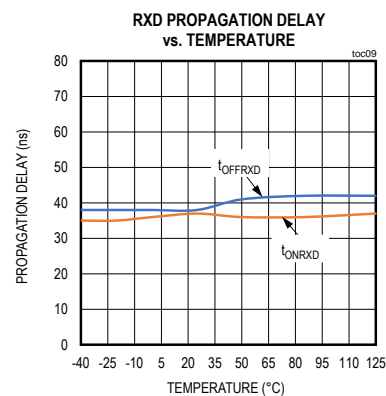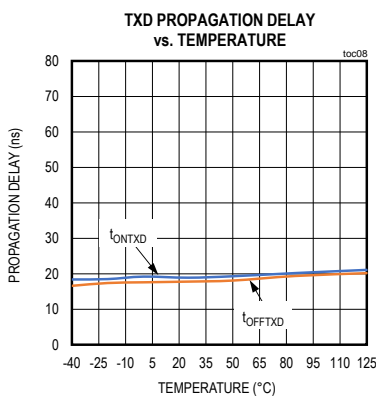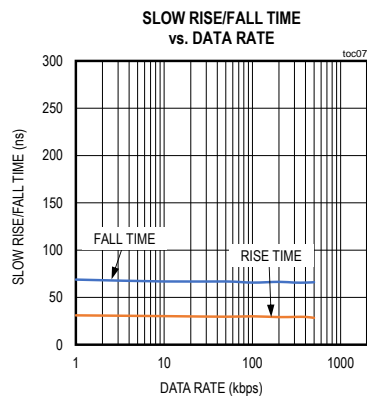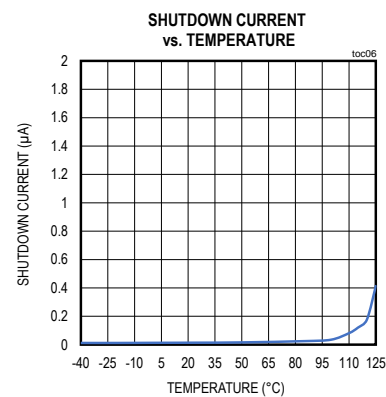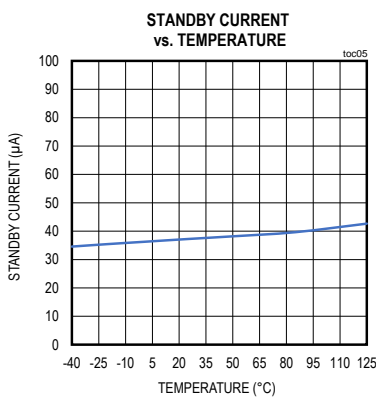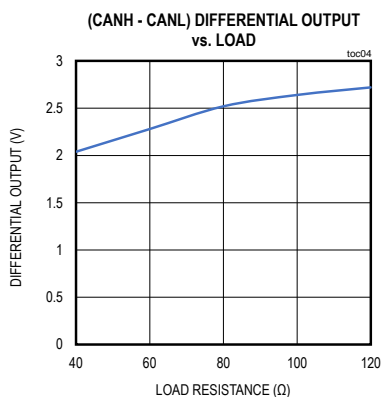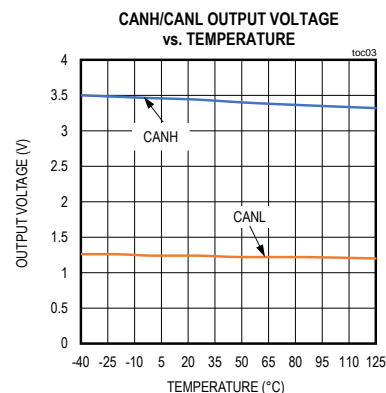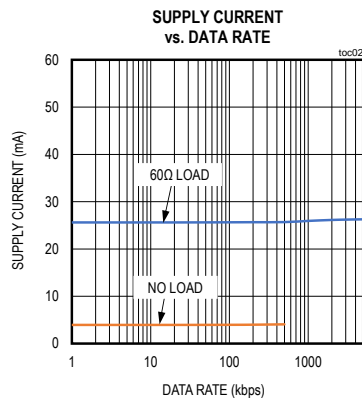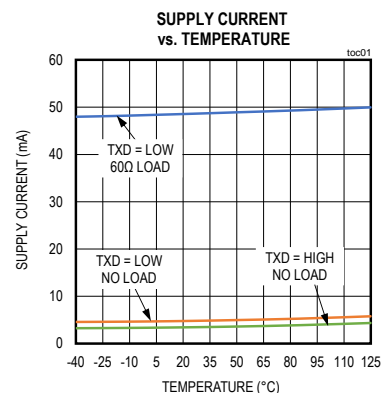


+5V, 4Mbps CAN Transceiver with ±40V Fault Protection, ±25V CMR, and ±40kV ESD in 8-Pin SOT23

MAX33042E

$V_{DD} = 5V$, $R_{LD} = 60\Omega$, $C_{LD} = 100pF$, $C_L = 15pF$, $T_A = +25^\circ C$, unless otherwise noted.

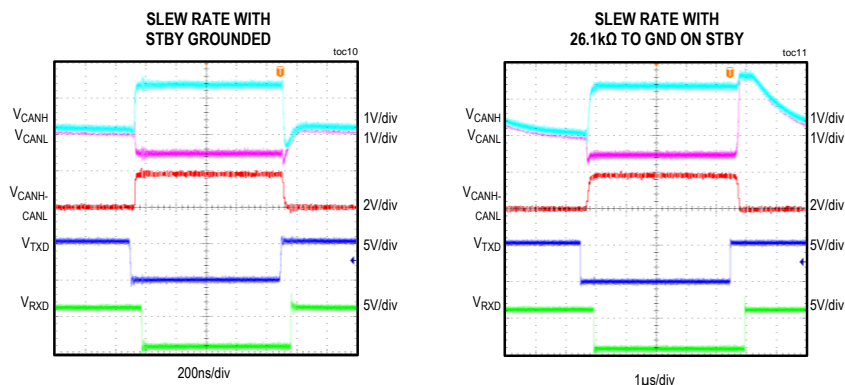


Pin Configurations

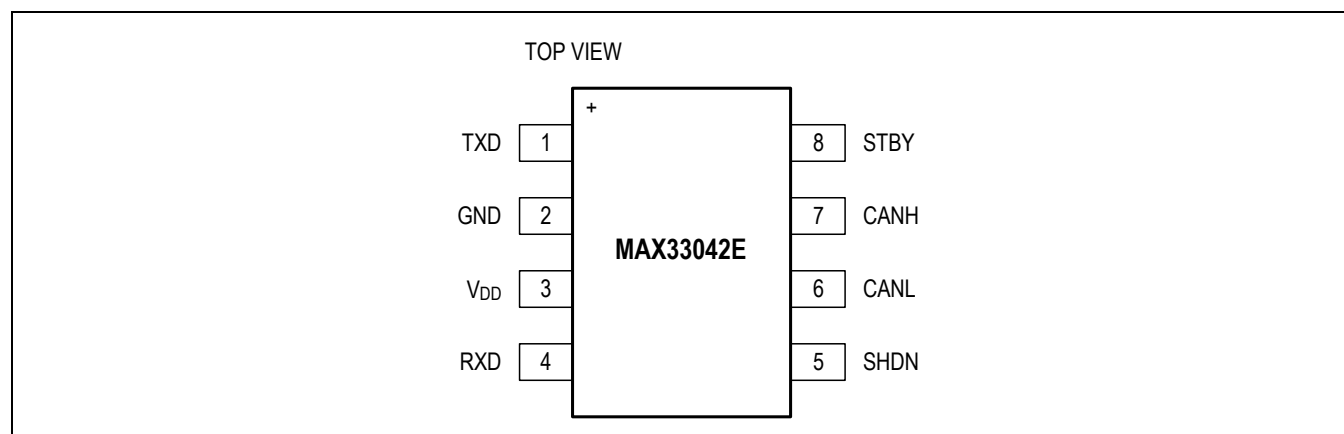

Pin Descriptions

| PIN | NAME | FUNCTION |
|-----|----------|--|
| 1 | TXD | Transmit Data Input. Drive TXD high to set the driver in the recessive state. Drive TXD low to set the driver in the dominant state. TXD has an internal pullup to V_{DD} . |
| 2 | GND | Ground |
| 3 | V_{DD} | Supply Voltage. Bypass V_{DD} to GND with a $0.1\mu F$ capacitor. |
| 4 | RXD | Receive Data Output. RXD is high when CANH and CANL are in the recessive state. RXD is low when CANH and CANL are in the dominant state. |
| 5 | SHDN | Shutdown input, CMOS/TTL compatible. Drive SHDN high to put MAX33042E in shutdown. SHDN has an internal pulldown resistor to GND. |
| 6 | CANL | CAN Bus-Line Low |
| 7 | CANH | CAN Bus-Line High |
| 8 | STBY | Standby Mode. A logic-high on STBY pin selects the standby mode. In standby mode, the transceiver is not able to transmit data and the receiver is in low-power mode. A logic-low on STBY pin puts the transceiver in normal operating mode. A $26.1k\Omega$ external resistor can be used to connect the STBY pin to ground for the slow slew rate. |

Functional Diagrams

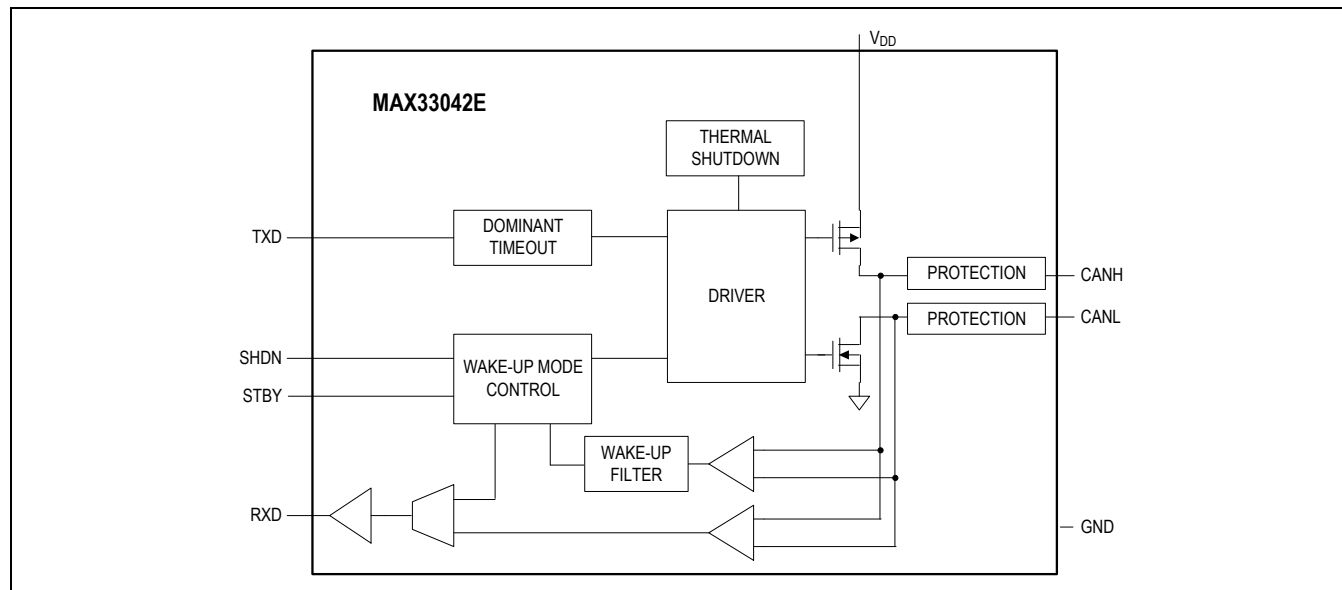

Detailed Description

The MAX33042E is a fault-protected CAN transceiver designed for industrial applications with a number of integrated robust protection features. This device provides a link between the CAN protocol controller and the physical wires of the bus lines in a control area network (CAN). They can be used for DeviceNet™ applications as well.

The CAN transceiver is fault-protected on CANH and CANL up to ±40V, making it suitable for applications where overvoltage protection is required. This device is rated up to a high ±40kV ESD HBM on CANH and CANL, suitable for protection during the manufacturing process, and even in the field where there is human interface for installation and maintenance. In addition, a common-mode voltage of ±25V enables communication in noisy environments where there are ground plane differences between different systems due to the close proximity of heavy equipment machinery or operation from different transformers. This device's dominant timeout prevents the bus from being blocked by a hung-up microcontroller. The CANH and CANL outputs are short-circuit, current-limited, and protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs in a high-impedance state.

These devices can operate up to 4Mbps with a standby mode where it shuts off the transmitter and reduces the current to 45µA, typ.

±40V Fault Protection

The MAX33042E features ±40V of fault protection. The CANH and CANL data lines are capable of withstanding a short from -40V to +40V. This extended overvoltage range makes The MAX33042E suitable for applications where accidental shorts to power supply lines are possible due to human intervention.

Transmitter

The transmitter converts a single-ended input signal (TXD) from the local CAN controller to differential outputs for the CANH and CANL bus lines. The truth table for the transmitter and receiver is provided in Table 1.

Transmitter Output Protection

The MAX33042E protects the transmitter output stage against a short-circuit to a positive or negative voltage by limiting the driver current. Thermal shutdown further protects the devices from excessive temperatures that may result from a short or high ambient temperature. The transmitter returns to normal operation once the temperature is reduced below the threshold.

Transmitter-Dominant Timeout

The device features a transmitter-dominant timeout (t_{DOM}) that prevents erroneous CAN controllers from clamping the bus to a dominant level by maintaining a continuous low TXD signal. When TXD remains in the dominant state (low) for greater than 2.5ms typical t_{DOM} , the transmitter is disabled, releasing the bus to a recessive state (Figure 4). After a dominant timeout fault, the transmitter is re-enabled when receiving a rising edge at TXD. The transmitter-dominant timeout limits the minimum possible data rate to 9kbps for standard CAN protocol.

Receiver

The receiver reads the differential input from the bus line CANH and CANL and transfers this data as a single-ended output RXD to the CAN controller. It consists of a comparator that senses the difference, $V_{DIFF} = (CANH - CANL)$, with respect to an internal threshold of 0.7V. If $V_{DIFF} > 0.9V$, a logic-low is present on RXD. If $V_{DIFF} < 0.5V$, a logic-high is present. The CANH and CANL common-mode range is ±25V. RXD is a logic-high when CANH and CANL are shorted or terminated and undriven.

Standby Mode

Drive the STBY pin high for standby mode, which switches the transmitter off and the receiver to a low current and low-speed state. The supply current is reduced during standby mode. The bus line is monitored by a low differential comparator to detect and recognize a wakeup event on the bus line. Once the comparator detects a dominant bus level greater than 2μs typical t_{WAKE} , RXD pulls low. Drive the STBY pin low for normal operation.

Slow Slew Rate

Connect a 26.1kΩ resistor between ground and the STBY pin to reduce the slew rate on the transmitter output. The STBY pin voltage should be between 0.1V to 0.6V to remain in slow slew rate. This will change the MAX33042E with a slow slew rate of 50V/μs for rising edge compared with normal mode at 200V/μs. For falling edge, the slow slew rate is 30V/μs compared with normal mode at 110V/μs.

Table 1. Transmitter and Receiver Truth Table (When Not Connected to the Bus)

| MODE | TXD | TXD LOW TIME | CANH | CANL | BUS STATE | RXD |
|-------------------------------|------|--------------|------------|------------|-----------|------|
| Normal (STBY = low) | Low | $< t_{DOM}$ | High | Low | Dominant | Low |
| Normal (STBY = low) | Low | $> t_{DOM}$ | $V_{DD}/2$ | $V_{DD}/2$ | Recessive | High |
| Normal (STBY = low) | High | X | $V_{DD}/2$ | $V_{DD}/2$ | Recessive | High |
| Standby (STBY = high) | X | X | High | Low | Dominant | Low |
| Standby (STBY = high) | X | X | $V_{DD}/2$ | $V_{DD}/2$ | Recessive | High |
| Shutdown (SHDN = STBY = high) | X | X | $V_{DD}/2$ | $V_{DD}/2$ | Recessive | High |

X = Don't care

Shutdown Mode

Drive the SHDN pin high for shutdown mode, which switches the transmitter and receiver off. The supply current is reduced to maximum of 3μA during shutdown mode. Drive the SHDN pin low for normal operation.

Applications Information


Reduced EMI and Reflections

In multidrop CAN applications, it is important to maintain a single linear bus of uniform impedance that is properly terminated at each end. A star, ring, or tree configuration should never be used. Any deviation from the end-to-end wiring scheme creates a stub. High-speed data edges on a stub can create reflections back down to the bus. These reflections can cause data errors by eroding the noise margin of the system.

Although stubs are unavoidable in a multidrop system, care should be taken to keep these stubs as short as possible, especially when operating with high data rates.

Typical Application Circuits

Multidrop CAN Bus

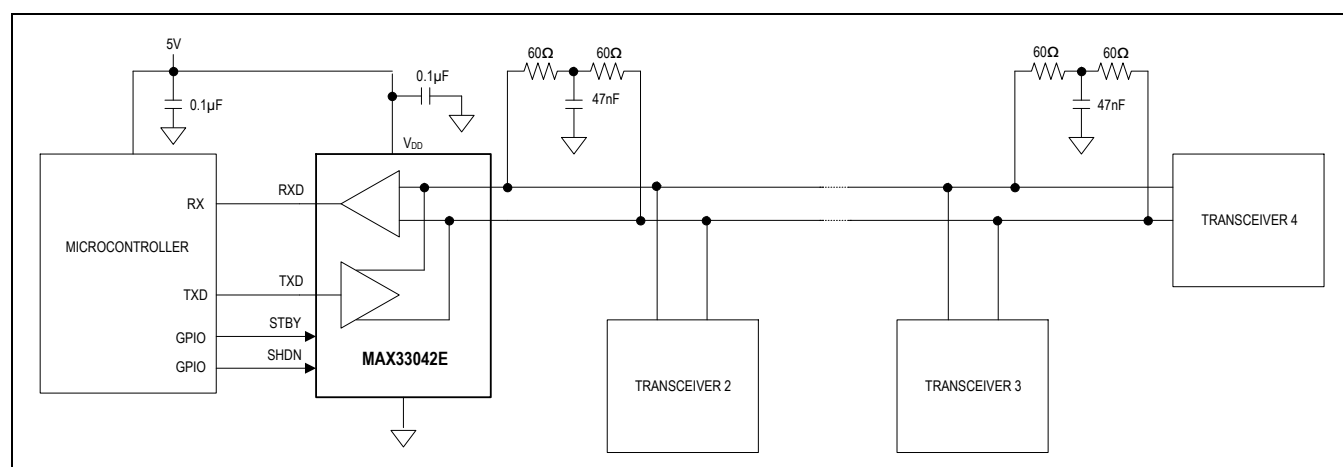

Ordering Information

| PART NUMBER | TEMP RANGE | PIN-PACKAGE |
|----------------|-----------------|-------------|
| MAX33042EASA+ | -40°C to +125°C | 8 SO |
| MAX33042EASA+T | -40°C to +125°C | 8 SO |
| MAX33042EAKA+ | -40°C to +125°C | 8 SOT23 |
| MAX33042EAKA+T | -40°C to +125°C | 8 SOT23 |

+Denotes a lead (Pb)-free/RoHS-compliant package.

*Future product—contact factory for availability.

+5V, 4Mbps CAN Transceiver with
±40V Fault Protection, ±25V CMR,
and ±40kV ESD in 8-Pin SOT23

MAX33042E

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|--------------------|------------------|--|------------------|
| 0 | 1/21 | Release for market intro | — |
| 1 | 12/21 | Updated Typical Applications Circuits, Multidrop CAN Bus | 13 |
| 2 | 1/22 | Updated Ordering Information | 13 |



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MAX33042EAKA+](#) [MAX33042EAKA+T](#) [MAX33042EASA+T](#) [MAX33042EASA+](#)