



High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

General Description

The MAX4641/MAX4642/MAX4643 are monolithic, dual, single-pole/single-throw (SPST) switches that can operate from a single supply ranging from +1.8V to +5.5V. The MAX4641/MAX4642/MAX4643 provide low 4Ω on-resistance (RON), 0.6Ω RON matching between channels, and 1Ω RON flatness over the entire analog signal range. These devices offer fast switching times of less than 20ns while consuming less than 0.01μW of quiescent power.

The MAX4641 has two normally open (NO) switches, and the MAX4642 has two normally closed (NC) switches. The MAX4643 has one NO switch and one NC switch. All three devices have low 0.35nA leakage currents over the entire temperature range. The MAX4641/MAX4642/MAX4643 are available in small 8-pin μMAX and 8-pin QFN packages.

Applications

Battery-Operated Equipment
Audio and Video Signal Routing
Low-Voltage Data-Acquisition Systems
Sample-and-Hold Circuits
Communications Circuits

Features

- ◆ +1.8V to +5.5V Single-Supply Operation
- ◆ Rail-to-Rail™ Analog Signal Range
- ◆ Guaranteed RON
 - 4Ω max (+5V supply)
 - 8Ω max (+3V supply)
- ◆ +1.8V Operation
 - RON 30Ω typ Over Temperature
 - TON 18ns typ, TOFF 12ns typ
- ◆ Guaranteed RON Flatness: 1Ω (+5V supply)
- ◆ Guaranteed RON Match Between Channels 0.6Ω (+5V supply)
- ◆ Low Leakage (<0.35nA) Over Entire Temperature Range
- ◆ Excellent AC Characteristics
 - Low Crosstalk: -97dB at 1MHz
 - High Off-Isolation: -80dB at 1MHz
 - 0.018% Total Harmonic Distortion
- ◆ Low Power Consumption: < 0.01μW


Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|-------------------|----------------|-------------|
| MAX4641EUA | -40°C to +85°C | 8 μMAX |
| MAX4641EGA | -40°C to +85°C | 8 QFN 3 x 3 |
| MAX4642EUA | -40°C to +85°C | 8 μMAX |
| MAX4642EGA | -40°C to +85°C | 8 QFN 3 x 3 |
| MAX4643EUA | -40°C to +85°C | 8 μMAX |
| MAX4643EGA | -40°C to +85°C | 8 QFN 3 x 3 |


Rail-to-Rail is a trademark of Nippon Motorola, Ltd.

Pin Configurations/Functional Diagrams/Truth Tables


TOP VIEW



| MAX4641 | |
|---------|-----|
| IN_ | NO_ |
| 0 | OFF |
| 1 | ON |



| MAX4642 | |
|---------|-----|
| IN_ | NC_ |
| 0 | ON |
| 1 | OFF |



| MAX4643 | | |
|---------|-----|-----|
| IN_ | NO1 | NC2 |
| 0 | OFF | ON |
| 1 | ON | OFF |

Pin Configurations continued at end of data sheet.



Maxim Integrated Products 1

For pricing delivery, and ordering information please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX4641/MAX4642/MAX4643

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

(All Voltages Referenced to GND)

| | |
|--|---------------------------|
| V+ |-0.3V to +6V |
| IN_, COM_, NO_, NC_ (Note 1) |-0.3V to (V+ + 0.3V) |
| Continuous Current (any terminal) |±20mA |
| Continuous Current (NO_, NC_, COM_) |±50mA |
| Peak Current (NO_, NC_, COM_, pulsed at 1ms, 10% duty cycle) | ±100mA |

Continuous Power Dissipation (T_A = +70°C)

| | |
|--|----------------------|
| 8-Pin μMAX (derate 4.5mW/°C above +70°C) | 362mW |
| 8-Pin QFN (derate 24.4mW/°C above +70°C) | 1951mW |
| Operating Temperature Range |-40°C to +85°C |
| Junction Temperature |+150°C |
| Storage Temperature Range |-65°C to +150°C |
| Lead Temperature (soldering, 10s) | +300°C |

Note 1: Signals on NO_, NC_, COM_, or IN_ exceeding V+ or GND are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Single +5V Supply

(V+ = +4.5V to +5.5V, V_{INH} = 2.4V, V_{INL} = 0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|---|---|--|---|-------|-------|------|-------|
| ANALOG SWITCH | | | | | | | |
| Analog Signal Range | V _{COM_} , V _{NO_} , V _{NC_} | | | 0 | | V+ | V |
| On-Resistance | R _{ON} | V+ = 4.5V, I _{COM_} = 10mA, V _{NO_} or V _{NC_} = 0 to V+ | T _A = +25°C | 2.5 | 4 | Ω | |
| | | | T _A = T _{MIN} to T _{MAX} | 5 | | | |
| On-Resistance Match Between Channels (Notes 2, 8) | ΔR _{ON} | V+ = 4.5V, I _{COM_} = 10mA, V _{NO_} or V _{NC_} = 0 to V+ | T _A = +25°C | 0.2 | 0.6 | Ω | |
| | | | T _A = T _{MIN} to T _{MAX} | 0.8 | | | |
| On-Resistance Flatness (Note 3) | R _{FLAT} | V+ = 4.5V, I _{COM_} = 10mA, V _{NO_} or V _{NC_} = 0 to V+ | T _A = +25°C | 0.85 | 1 | Ω | |
| | | | T _A = T _{MIN} to T _{MAX} | 1.5 | | | |
| NO_, NC_ Off-Leakage Current (Note 4) | I _{NO_(OFF)} , I _{NC_(OFF)} | V+ = 5.5V, V _{COM_} = 1V or 4.5V, V _{NO_} or V _{NC_} = 4.5V or 1V | T _A = +25°C | -0.25 | 0.01 | 0.25 | nA |
| | | | T _A = T _{MIN} to T _{MAX} | -0.35 | 0.35 | | |
| COM_ Off-Leakage Current (Note 4) | I _{COM_(OFF)} | V+ = 5.5V, V _{COM_} = 1V or 4.5V, V _{NO_} or V _{NC_} = 4.5V or 1V | T _A = +25°C | -0.25 | 0.01 | 0.25 | nA |
| | | | T _A = T _{MIN} to T _{MAX} | -0.35 | 0.35 | | |
| COM_ On-Leakage Current (Notes 4, 5) | I _{COM_(ON)} | V+ = 5.5V, V _{COM_} = 1V or 4.5V | T _A = +25°C | -0.25 | 0.01 | 0.25 | nA |
| | | | T _A = T _{MIN} to T _{MAX} | -0.35 | 0.35 | | |
| DIGITAL INPUTS | | | | | | | |
| IN_ Input Logic High | V _{IH} | | | 2.4 | | | V |
| IN_ Input Logic Low | V _{IL} | | | | | 0.8 | V |
| IN_ Input Current | I _{IN} | V _{IN_} = 0.8V or 2.4V | | -0.1 | 0.005 | 0.1 | μA |

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

MAX4641/MAX4642/MAX4643

ELECTRICAL CHARACTERISTICS—Single +5V Supply (continued)

(V+ = +4.5V to +5.5V, VINH = 2.4V, VINL = 0.8V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|------------------------|--|-------------------|-------|-----|-------|
| DYNAMIC | | | | | | |
| Turn-On Time (Note 4) | tON | RL = 300Ω, CL = 35pF, VNO_ = VNC_ = 3V, Figure 2 | TA = +25°C | 9 | 15 | ns |
| | | | TA = TMIN to TMAX | | 18 | |
| Turn-Off Time (Note 4) | tOFF | RL = 300Ω, CL = 35pF, VNO_ = VNC_ = 3V, Figure 2 | TA = +25°C | 5 | 8 | ns |
| | | | TA = TMIN to TMAX | | 10 | |
| Break-Before-Make (Note 4) (MAX4643 only) | tBBM | RL = 300Ω, CL = 35pF, VNO_ = VNC_ = 3V, Figure 2 | TA = +25°C | 7 | | ns |
| | | | TA = TMIN to TMAX | 1 | | |
| Charge Injection | Q | VGEN = 0, RGEN = 0, CL = 1nF, Figure 4 | | 2 | | pC |
| NO_, NC_ Off-Capacitance | CNO_ (OFF), CNC_ (OFF) | NO_ or NC_ = GND, f = 1MHz, Figure 5 | | 7 | | pF |
| COM_ Off-Capacitance | CCOM_ (OFF) | f = 1MHz, Figure 5 | | 7 | | pF |
| Switch On-Capacitance | C(ON) | f = 1MHz, Figure 5 | | 18 | | pF |
| Off-Isolation (Note 6) | VISO | CL = 5pF, RL = 50Ω, Figure 3 | f = 10MHz | -56 | | dB |
| | | | f = 1MHz | -80 | | |
| Crosstalk (Note 7) | VCT | CL = 5pF, RL = 50Ω, Figure 3 | f = 10MHz | -77 | | dB |
| | | | f = 1MHz | -97 | | |
| Total Harmonic Distortion | THD | RL = 600Ω, 0.5Vp-p, f = 20Hz to 20kHz | | 0.018 | | % |
| SUPPLY | | | | | | |
| Positive Supply Current | I+ | V+ = 5.5V, VIN_ = 0 or V+ | | 0.001 | 1.0 | μA |

ELECTRICAL CHARACTERISTICS—Single +3V Supply

(V+ = +2.7V to +3.3V, VINH = 2.0V, VINL = 0.4V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-------------------|---|-------------------|-----|-----|-------|
| ANALOG SWITCH | | | | | | |
| Analog Signal Range | VCOM_, VNO_, VNC_ | | 0 | | V+ | V |
| On-Resistance | RON | V+ = 2.7V, ICOM_ = 10mA, VNO_ or VNC_ = 0 to V+ | TA = +25°C | 6 | 8 | Ω |
| | | | TA = TMIN to TMAX | | 9 | |
| On-Resistance Match Between Channels (Notes 2, 8) | ΔRON | V+ = 2.7V, ICOM_ = 10mA, VNO_ or VNC_ = 0 to V+ | TA = +25°C | 0.2 | 0.6 | Ω |
| | | | TA = TMIN to TMAX | | 0.8 | |
| On-Resistance Flatness (Note 3) | RFLAT | V+ = 2.7V, ICOM_ = 10mA, VNO_ or VNC_ = 0 to V+ | TA = +25°C | 1.5 | 3.0 | Ω |
| | | | TA = TMIN to TMAX | | 3.5 | |

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

ELECTRICAL CHARACTERISTICS—Single +3V Supply (continued)

(V+ = +2.7V to +3.3V, VINH = 2.0V, VINL = 0.4V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|---|---|--|---|-------|-------|-----|-------|
| DIGITAL INPUTS | | | | | | | |
| IN_ Input Logic High | V _{IH} | | | 2.0 | | | V |
| IN_ Input Logic Low | V _{IL} | | | | | 0.4 | V |
| IN_ Input Current | I _{IN} | V _{IN_} = 0.4V or 2.0V | | -0.1 | 0.005 | 0.1 | μA |
| DYNAMIC | | | | | | | |
| Turn-On Time (Note 4) | t _{ON} | R _L = 300Ω, C _L = 35pF, V _{NO_} = V _{NC_} = 2V, Figure 2 | T _A = +25°C | 14 | 20 | ns | |
| | | | T _A = T _{MIN} to T _{MAX} | 22 | | | |
| Turn-Off Time (Note 4) | t _{OFF} | R _L = 300Ω, C _L = 35pF, V _{NO_} = V _{NC_} = 2V, Figure 2 | T _A = +25°C | 6 | 10 | ns | |
| | | | T _A = T _{MIN} to T _{MAX} | 11 | | | |
| Break-Before-Make (Note 4) (MAX4643 only) | t _{BBM} | R _L = 300Ω, C _L = 35pF, V _{NO_} = V _{NC_} = 2V, Figure 2 | T _A = +25°C | 7 | ns | | |
| | | | T _A = T _{MIN} to T _{MAX} | 1 | | | |
| Charge Injection | Q | V _{GEN} = 0, R _{GEN} = 0, C _L = 1nF, Figure 4 | | 2 | | pC | |
| NO_, NC_ Off-Capacitance | C _{NO_(OFF)} , C _{NC_(OFF)} | NO_ or NC_ = GND, f = 1MHz, Figure 5 | | 7 | | pF | |
| COM_ Off-Capacitance | C _{COM_(OFF)} | f = 1MHz, Figure 5 | | 7 | | pF | |
| Switch On-Capacitance | C _(ON) | f = 1MHz, Figure 5 | | 18 | | pF | |
| Off-Isolation (Note 6) | V _{ISO} | C _L = 5pF, R _L = 50Ω, Figure 3 | f = 10MHz | -56 | | dB | |
| | | | f = 1MHz | -80 | | | |
| Crosstalk (Note 7) | V _{CT} | C _L = 5pF, R _L = 50Ω, Figure 3 | f = 10MHz | -77 | | dB | |
| | | | f = 1MHz | -97 | | | |
| SUPPLY | | | | | | | |
| Positive Supply Current | I ₊ | V ₊ = 3.3V, V _{IN_} = 0 or V ₊ | | 0.001 | | 1.0 | μA |

Note 2: $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$.

Note 3: R_{ON} Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

Note 4: Guaranteed by design.

Note 5: On-Leakage performed with voltage applied to COM_, with NO_ and NC_ left floating.

Note 6: Off-Isolation = $20\log_{10}(V_{O_0} / V_{I_0})$, where V_{O_0} is V_{COM_0} and V_{I_0} is V_{NC_0} or V_{NO_0} from the network analyzer.










Note 7: Crosstalk is measured between the two switches.

Note 8: R_{ON} and ΔR_{ON} matching specifications for QFN-packaged parts are guaranteed by design.

High-Speed, Low-Voltage, 4Ω , Dual SPST CMOS Analog Switches

Typical Operating Characteristics

($V_+ = +5V$ or $+3V$, $V_{INH} = V_+$, $V_{INL} = GND$, $T_A = +25^\circ C$, unless otherwise noted.)

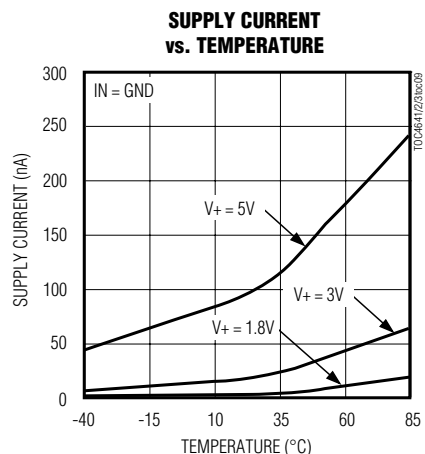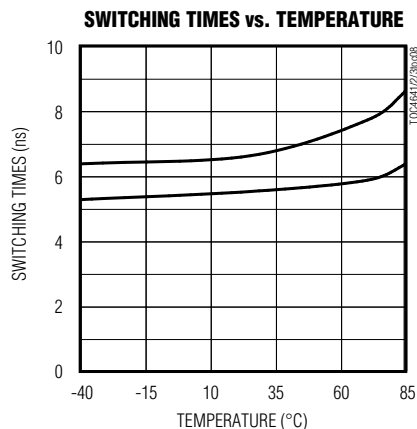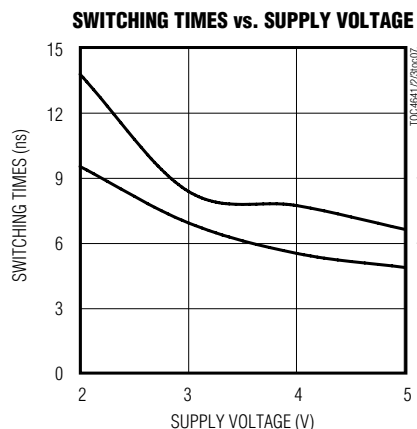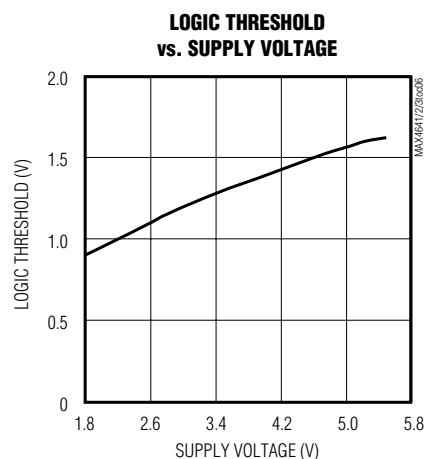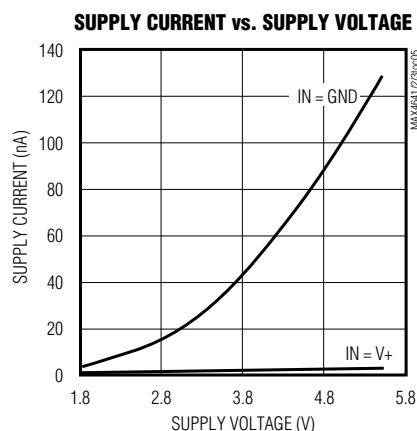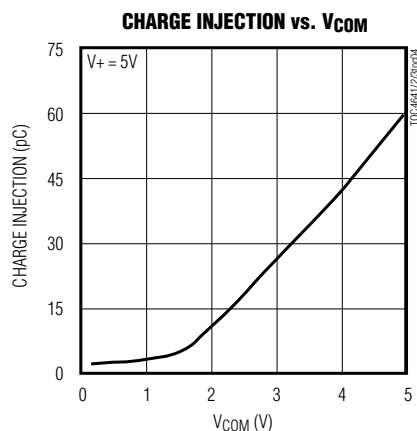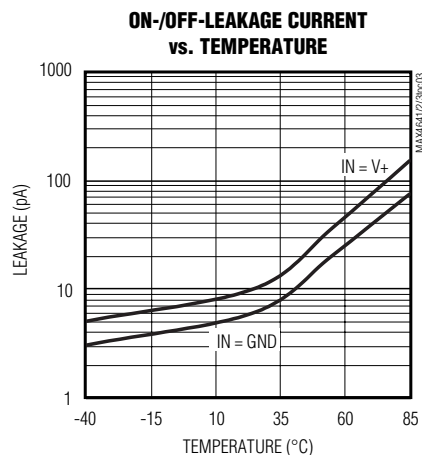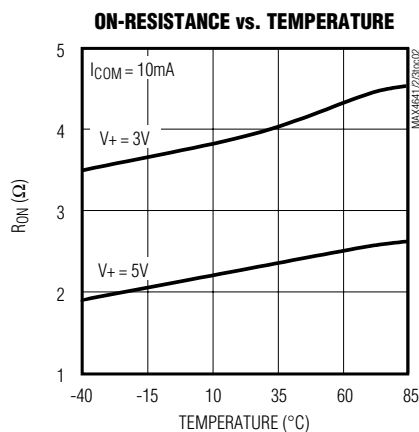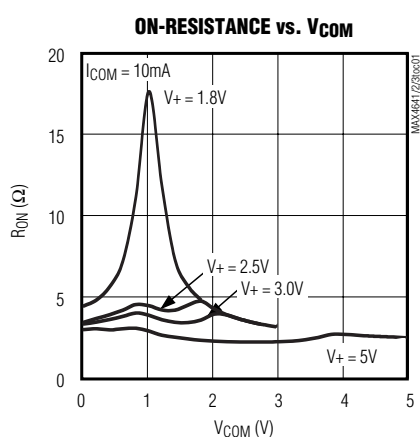


MAX4641/MAX4642/MAX4643

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

Typical Operating Characteristics (continued)

(V₊ = +5V or +3V, V_{INH} = V₊, V_{INL} = GND, T_A = +25°C, unless otherwise noted.)

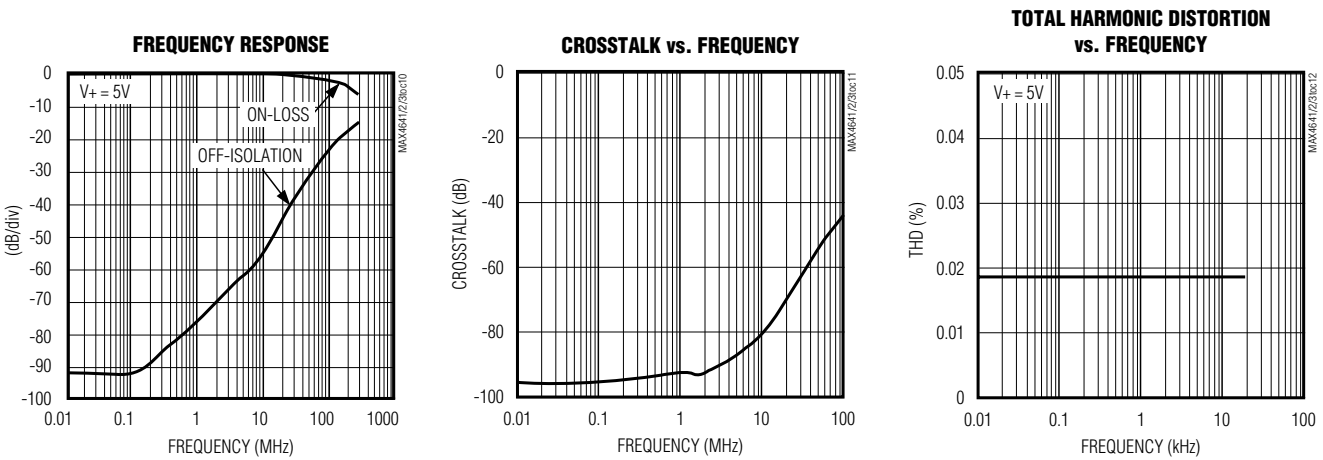


Pin Description

| PIN | | | NAME | FUNCTION |
|---------|---------|---------|------------|--|
| MAX4641 | MAX4642 | MAX4643 | | |
| 1, 5 | — | — | NO1, NO2 | Analog Switch Normally Open Terminals |
| — | 1, 5 | — | NC1, NC2 | Analog Switch Normally Closed Terminals |
| — | — | 1 | NO1 | Analog Switch Normally Open Terminal |
| — | — | 5 | NC2 | Analog Switch Normally Closed Terminal |
| 2, 6 | 2, 6 | 2, 6 | COM1, COM2 | Analog Switch Common Terminals |
| 3, 7 | 3, 7 | 3, 7 | IN2, IN1 | Logic-Controlled Inputs |
| 4 | 4 | 4 | GND | Ground |
| 8 | 8 | 8 | V+ | Positive Supply Input. Bypass with a 0.1μF capacitor to GND. |

Note: NO_, NC_, and COM_ pins are identical and interchangeable. Signals can be passed through either side of these bidirectional switches. However, the typical off-capacitances differ, as shown in the *Electrical Characteristics*.

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

Pin Configurations/Functional Diagrams/Truth Tables (continued)

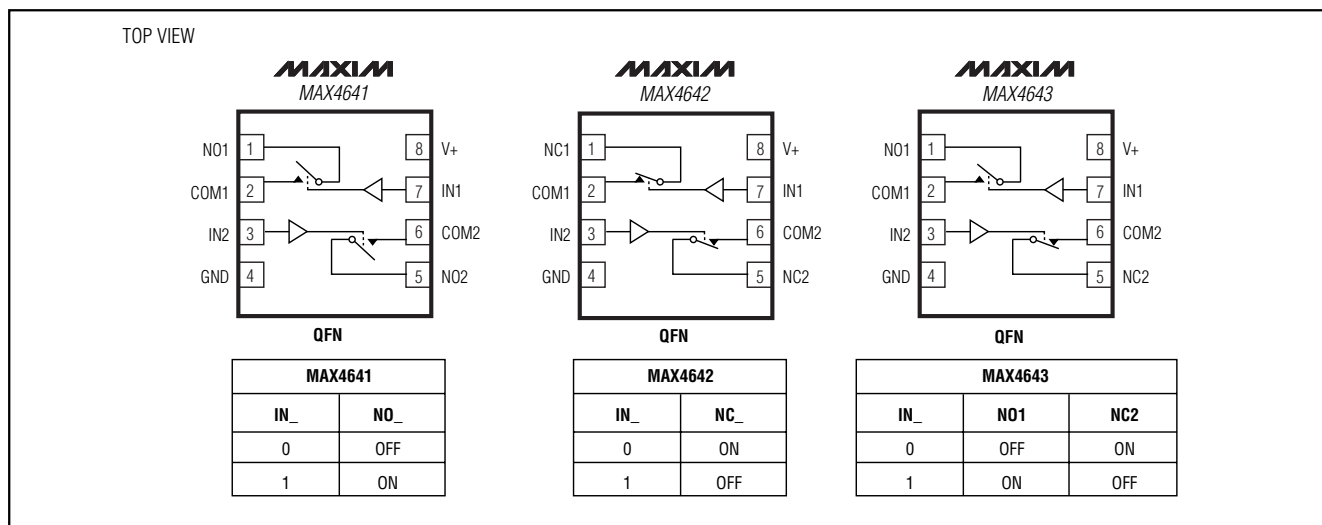

Applications Information

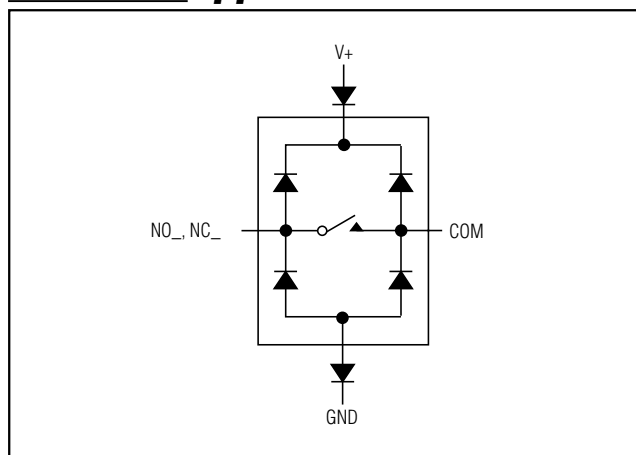


Figure 1. Overvoltage Protection Using External Blocking Diodes

The MAX4641/MAX4642/MAX4643 operate from a single supply ranging from +1.8V to +5.5V. The devices are guaranteed to be functional over that supply range, but TTL/CMOS compatibility is only valid for operation using a +5V supply. All voltage levels are referenced to GND. Positive and negative DC analog inputs or AC signals can be accommodated by shifting V+ and GND.

ESD-protection diodes are internally connected between each analog-signal pin and both V+ and GND. One of these diodes conducts if any analog signal

exceeds V+ or GND (Figure 1). Virtually all of the analog leakage current comes from the ESD diodes to V+ or GND. Although the ESD diodes on a given signal pin are identical, and therefore fairly well balanced, they are reverse biased differently. Each is biased by either V+ or GND and the analog signal. This means their leakages will vary as the signal varies. The difference in the two diode leakages to the V+ and GND pins constitutes the analog-signal-path leakage current. All analog leakage current flows between each pin and one of the supply terminals, not to the other switch terminal. This is why both sides of a given switch can show leakage currents of the same or opposite polarity.

There is no normal current path between the analog-signal paths and V+ or GND. V+ and GND also power the internal logic and logic-level translators. The logic-level translators convert the logic level into switched V+ and GND signals to drive the analog signal gates.

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

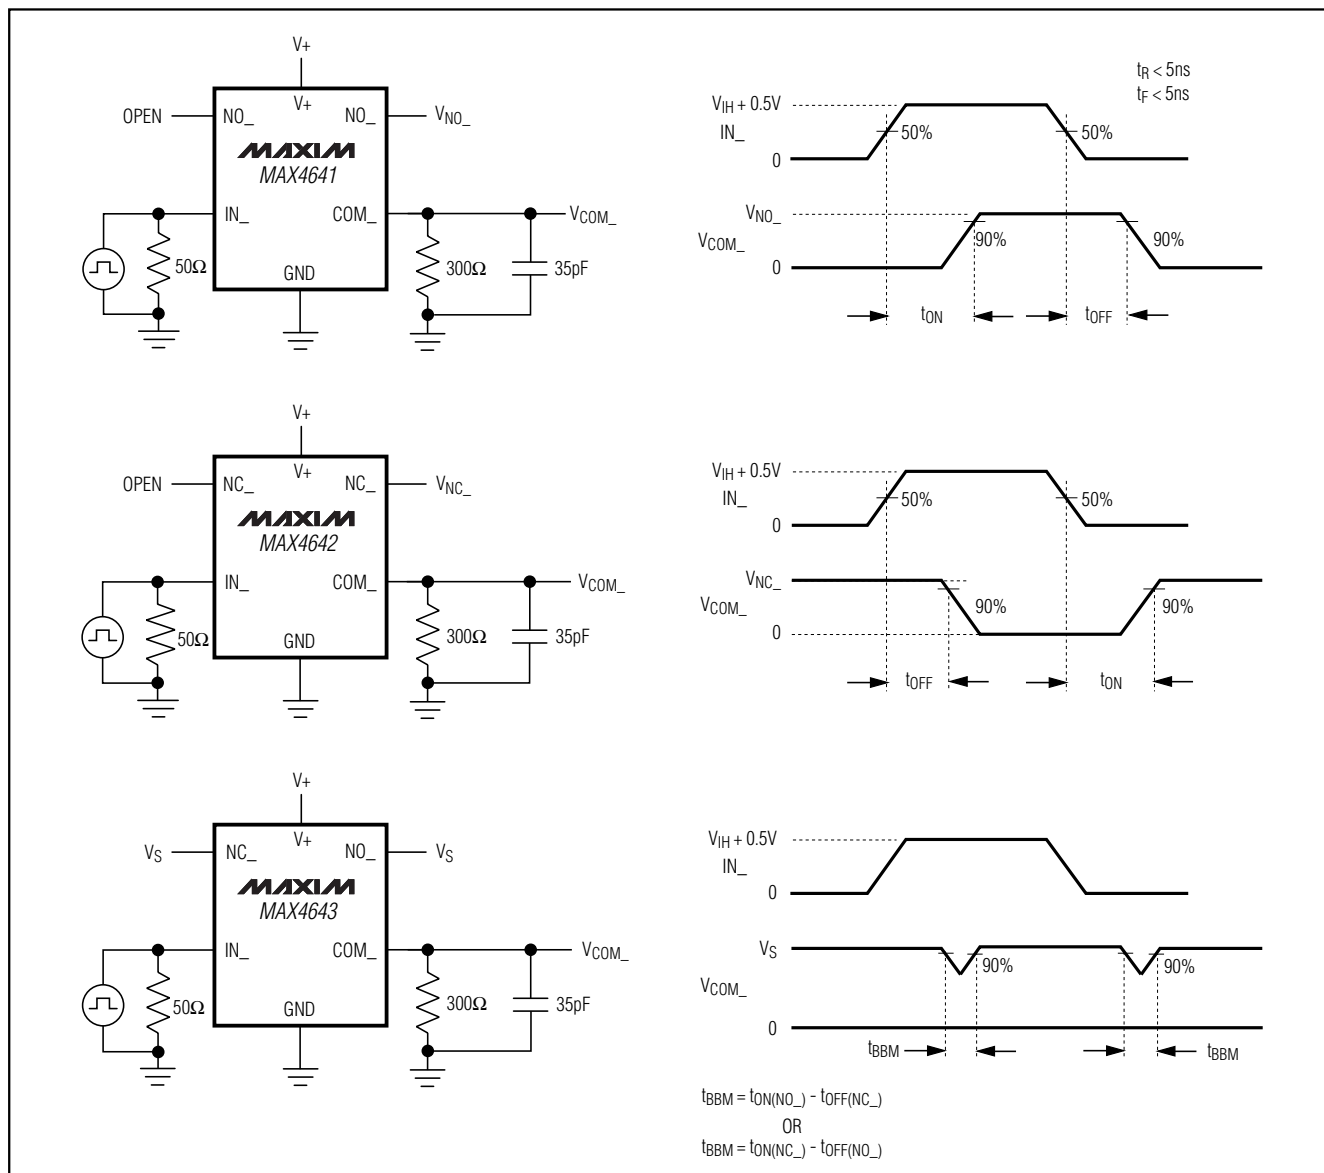


Figure 2. Switching Times

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

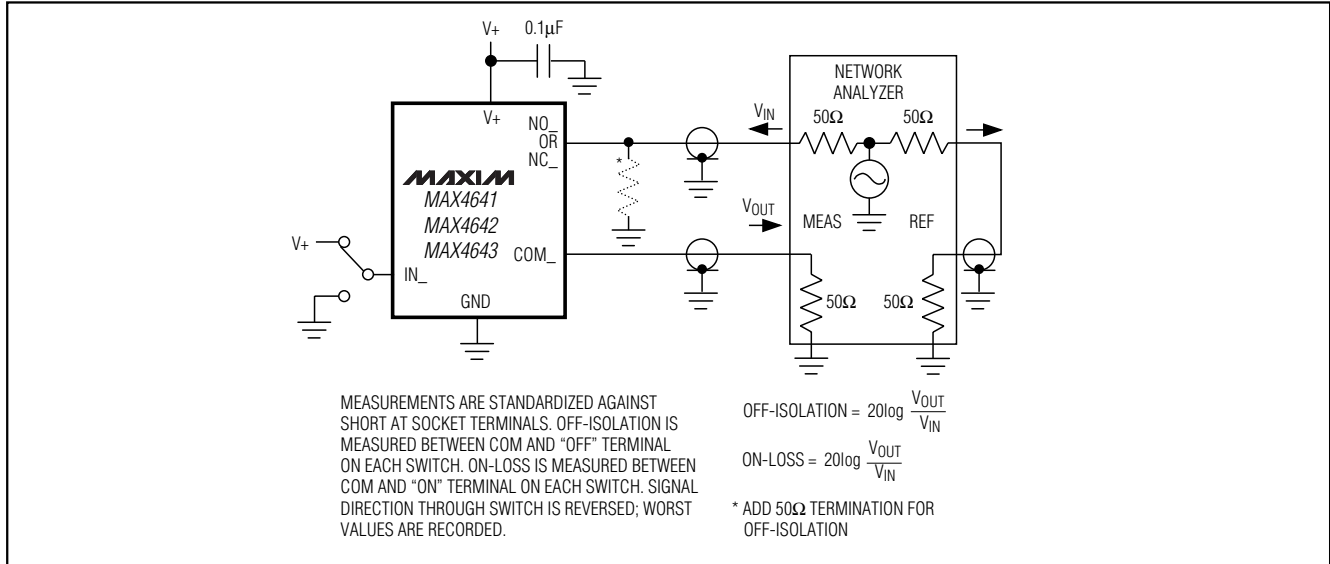


Figure 3. Off-Isolation, On-Loss, and Crosstalk

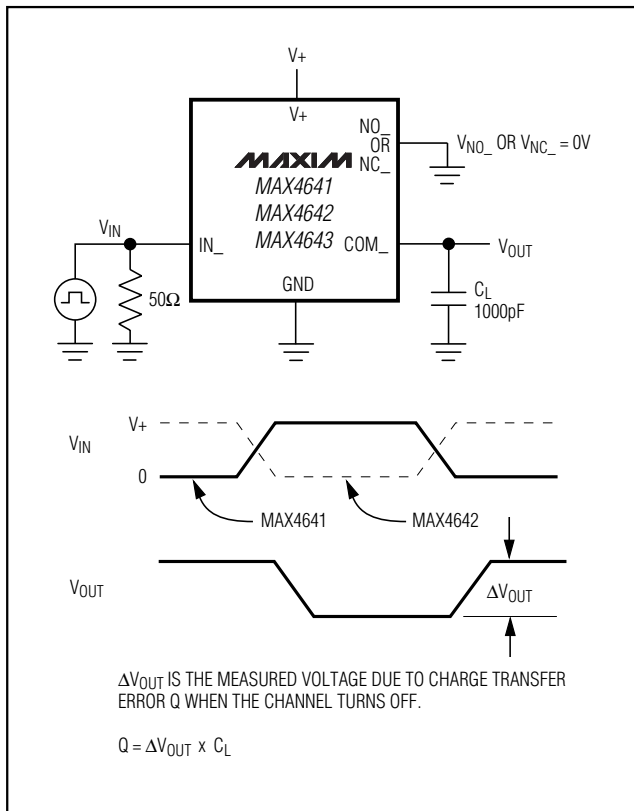


Figure 4. Charge Injection

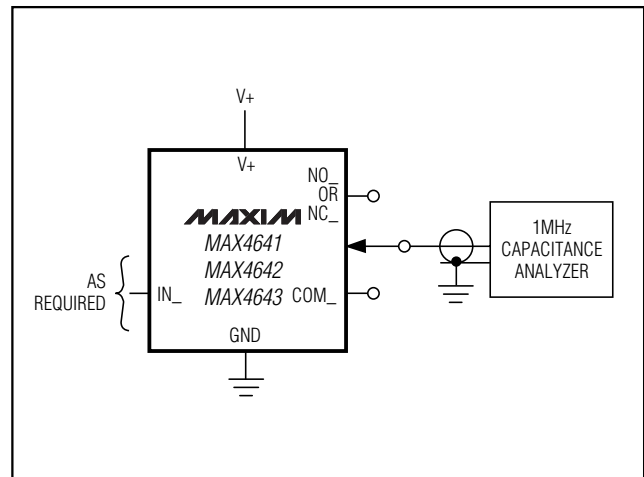



Figure 5. NO_, NC_, and COM_ Capacitance

Chip Information

TRANSISTOR COUNT: 105

High-Speed, Low-Voltage, 4Ω, Dual SPST CMOS Analog Switches

Package Information

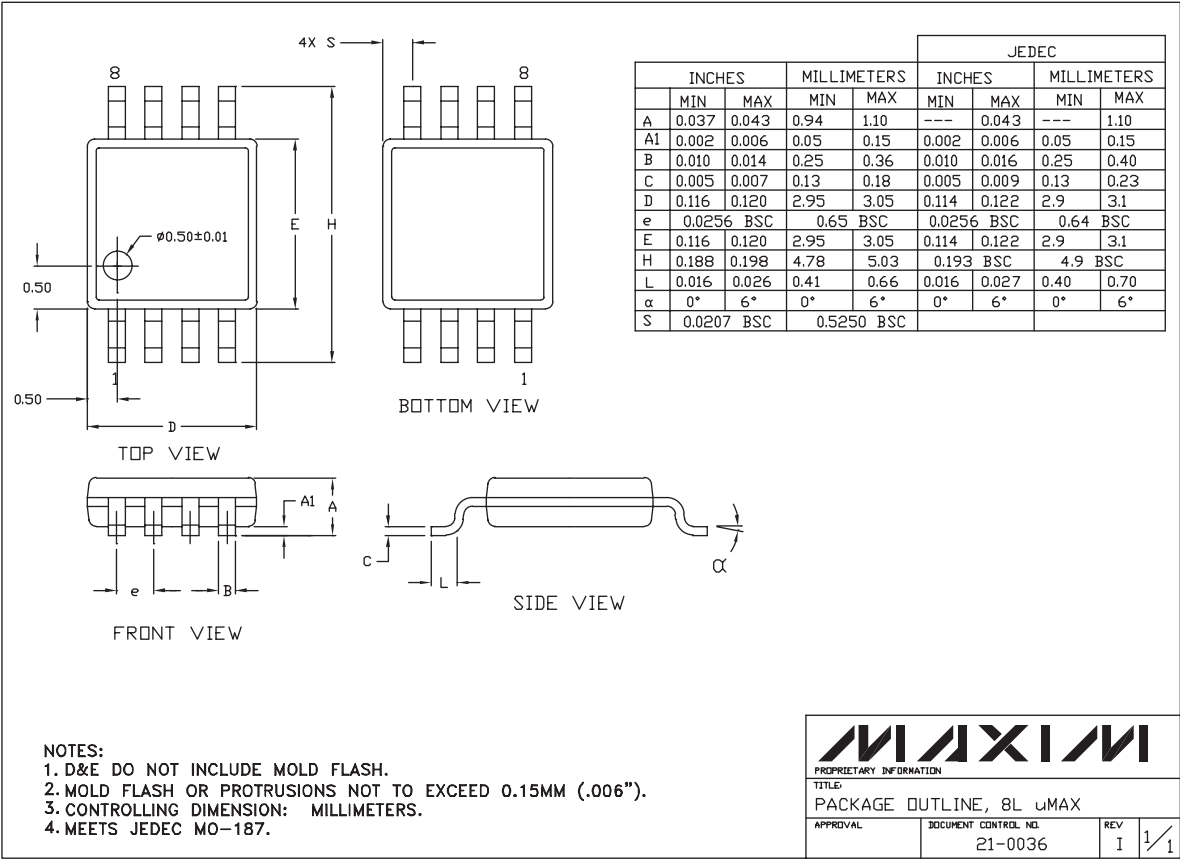

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[MAX4641EUA+](#) [MAX4641EUA+T](#)