

SC-USB-SPI-PICO

USB-to-SPI Interface Adapter for SC1905 and SC1894

General Description

SC-USB-SPI is an adapter used for converting a computer's USB interface connection to the serial parallel interface (SPI) used by the SC1905 and the SC1894 (RFPAL).

It is recommended for prototypes debug and/or programming linearizer during manufacturing.

RFPAL GUI installation package installs necessary drivers in order to work on Windows® 7 or Windows 10 with USB 2.0 or USB 3.0.

Connector Interface Descriptions

J1- RFPAL Interface


PIN	DESCRIPTIONS	CONNECTION TO RFPAL
1	WDT (Watch Dog Timer) *	J1-1 (TESTSEL2) **
2	Spare**	J1-2 (TESTSEL1) **
3	TESTSEL0	J1-3 (TESTSEL0)
4	STATO	J1-4 (STATO_B)
5	TXENB	J1-5 (TXENB)
6	RESETN	J1-6 (RESETN)
7	GND	J1-7 (GND)
8	SSN	J1-8 (SSN)
9	GND	J1-9 (GND)
10	SDO	J1-10 (SDI)
11	GND	J1-11 (GND)
12	SDI	J1-12 (SDO_B)
13	GND	J1-13 (GND)
14	SCK	J1-14 (SCLK)

* : For factory use only.

** : Signal not used on Evaluation Board (SC1894/SC1905)

Features

- USB interface connection to the serial parallel interface to the SC1894 and the SC1905
- Windows 10, Windows 7
- USB 3.0 and USB 2.0

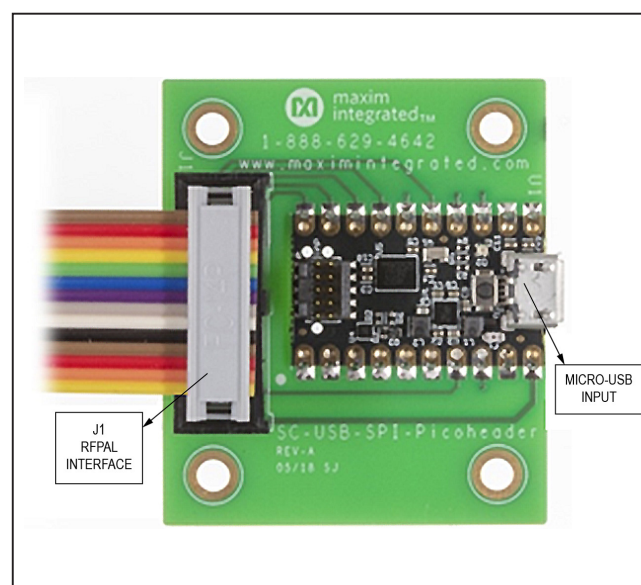

Adapter Ordering Information

PART NUMBER	DESCRIPTION
SC-USB-SPI-PICO	Adapter from USB to interface to the SC1905 and SC1894 serial parallel interface

Windows is a registered trademark and registered service mark of Microsoft Corporation.

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	12/18	Initial release	—

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SC-USB-SPI-PICO](#)