



### Typical Applications

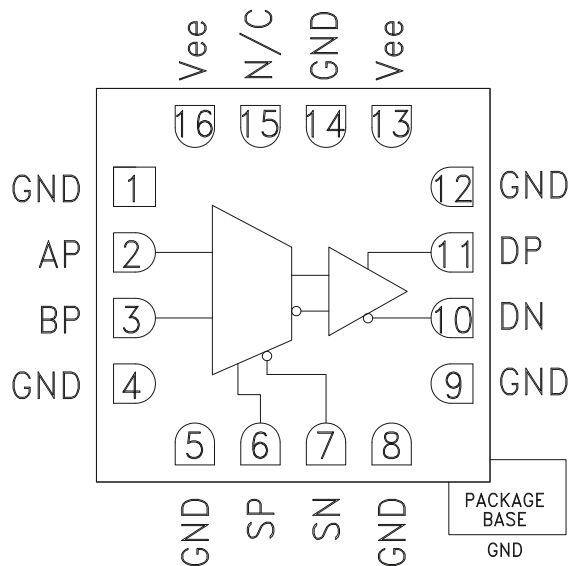
The HMC728LC3C is ideal for:

- 2:1 Multiplexer up to 14 Gbps
- RF ATE Applications
- Broadband Test & Measurement
- Serial Data Transmission up to 14 Gbps
- Redundant Path Switching
- Built-in Test

### Features

- Supports High Data Rates: up to 14 Gbps
- Single-Ended Inputs
- Differential or Single-Ended Outputs
- Fast Rise and Fall Times: 17 / 15 ps
- Low Power Consumption: 250 mW typ.
- Propagation Delay: 125 ps
- Single Supply: -3.3 V
- 16 Lead Ceramic 3x3 mm SMT Package: 9 mm<sup>2</sup>

### Functional Diagram



### General Description

The HMC728LC3C is a 2:1 Selector designed to support data transmission rates of up to 14 Gbps, and selector port operation of up to 14 GHz. The selector routes one of the two single-ended inputs to the differential output upon assertion of the proper select port.

All differential inputs to the HMC728LC3C are CML and terminated on-chip with 50 Ohms to the positive supply, GND, and may be DC or AC coupled. The differential CML outputs are source terminated to 50 Ohms and may also be AC or DC coupled. Outputs can be connected directly to a 50 Ohm ground-terminated system or drive devices with CML logic input. The HMC728LC3C operates from a single -3.3 V supply and is available in ROHS-compliant 3x3 mm SMT package.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_{ee} = -3.3\text{ V}$

| Parameter                        | Conditions                    | Min.   | Typ.   | Max    | Units |
|----------------------------------|-------------------------------|--------|--------|--------|-------|
| Power Supply Voltage             |                               | -3.6   | -3.3   | -3.0   | V     |
| Power Supply Current             |                               |        | 76     |        | mA    |
| Maximum Data Rate                |                               |        | 14     |        | Gbps  |
| Maximum Select Rate              |                               |        | 14     |        | GHz   |
| Maximum Serial Transmission Rate |                               |        | 26     |        | Gbps  |
| Input Vcm                        | Vin = 600 mVp-p, Single-Ended | -0.375 | -0.300 | -0.275 | V     |
| Input Voltage Range              |                               | -1.5   |        | 0.5    | V     |
| Input Differential Range         |                               | 0.1    |        | 2.0    | Vp-p  |
| Input Return Loss                | Frequency <14 GHz             |        | 10     |        | dB    |
| Output Amplitude                 | Single-Ended, peak-to-peak    |        | 550    |        | mVp-p |
|                                  | Differential, peak-to-peak    |        | 1100   |        | mVp-p |
| Output High Voltage              |                               |        | -10    |        | mV    |

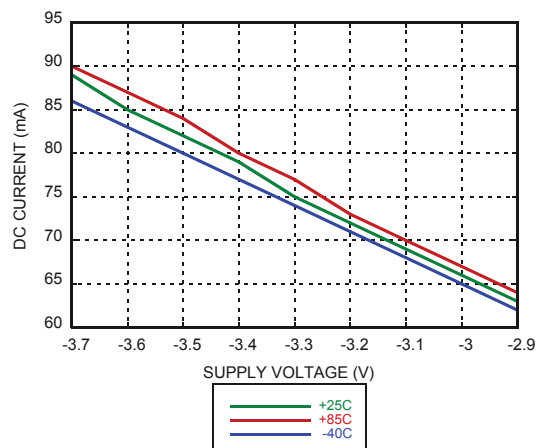
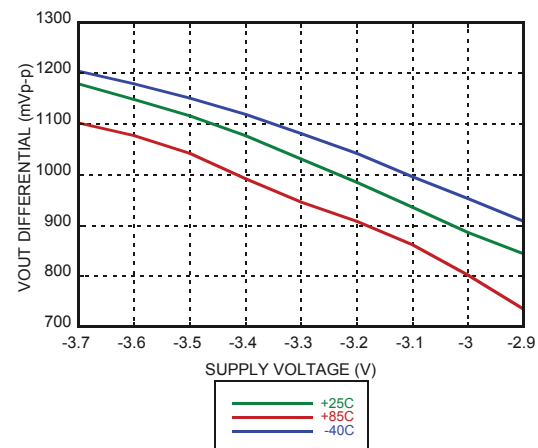
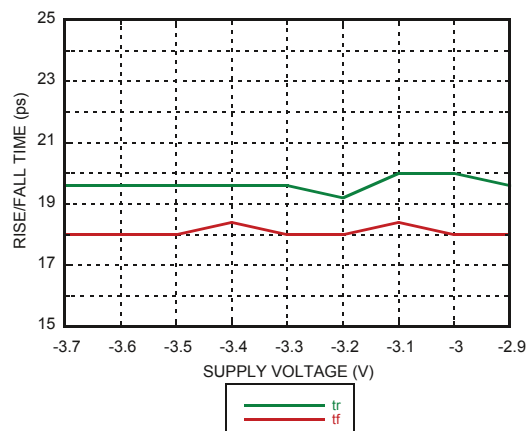
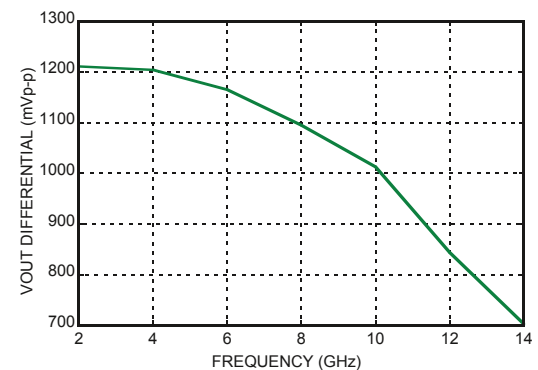
Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D


**14 Gbps, 2:1 SELECTOR**
**Electrical Specifications (continued)**

| Parameter                                                      | Conditions                                      | Min. | Typ.    | Max. | Units   |
|----------------------------------------------------------------|-------------------------------------------------|------|---------|------|---------|
| Output Low Voltage                                             |                                                 |      | -560    |      | mV      |
| Output Rise / Fall Time                                        | Differential, 20% - 80%                         |      | 17 / 15 |      | ps      |
| Output Return Loss                                             | Frequency <14 GHz                               |      | 10      |      | dB      |
| Random Jitter, Jr                                              | rms                                             |      |         | 0.2  | ps rms  |
| Deterministic Jitter, Jd                                       | peak-to-peak, 2 <sup>15</sup> -1 PRBS input [1] |      | 2       |      | ps, p-p |
| Propagation Delay, A or B to D <sub>OUT</sub> , t <sub>d</sub> |                                                 |      | 125     |      | ps      |
| Propagation Delay Select to Data, t <sub>ds</sub>              |                                                 |      | 135     |      | ps      |
| Set Up & Hold Time, t <sub>SH</sub>                            |                                                 |      | 6       |      | ps      |

[1] Deterministic jitter calculated by simultaneously measuring the jitter of a 300 mV, 13 GHz, 2<sup>15</sup>-1 PRBS input, and a single-ended output

**DC Current vs. Supply Voltage [1]**

**Output Differential Voltage vs. Supply Voltage [2]**

**Rise / Fall Time vs. Supply Voltage [1]**

**Output Differential Voltage vs. Frequency [3]**


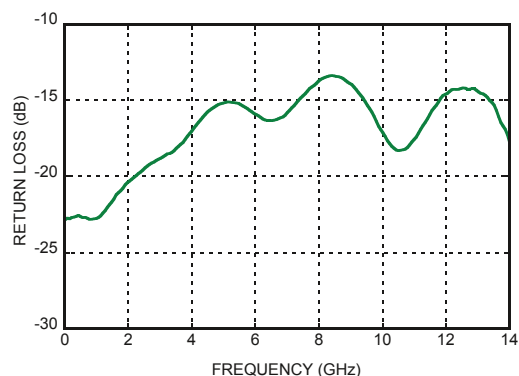
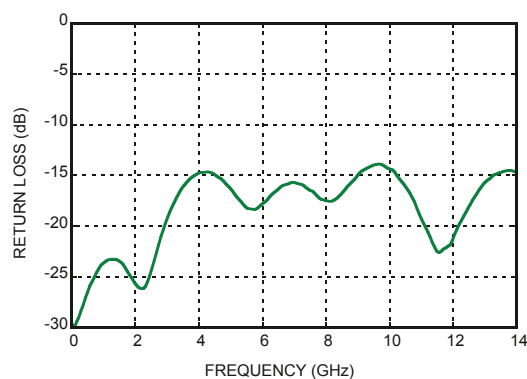
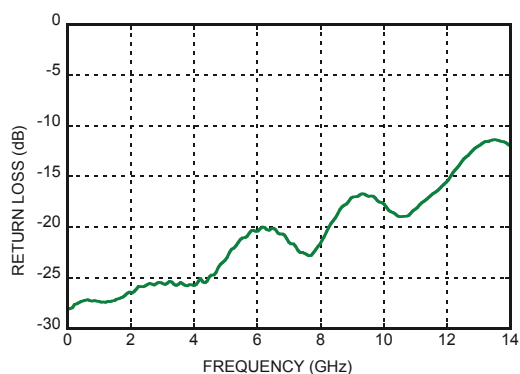
[1] Data rate = 13 Gbps

[2] Frequency = 10 GHz

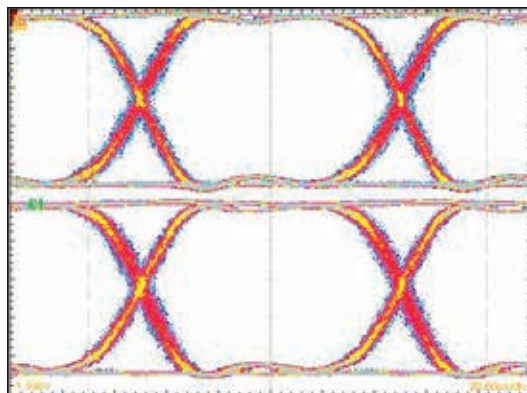
[3] Vee = -3/3 V

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D


**Output Return Loss vs. Frequency**

**Return Loss of Select Input**

**Return Loss of Data Input**


### Eye Diagram



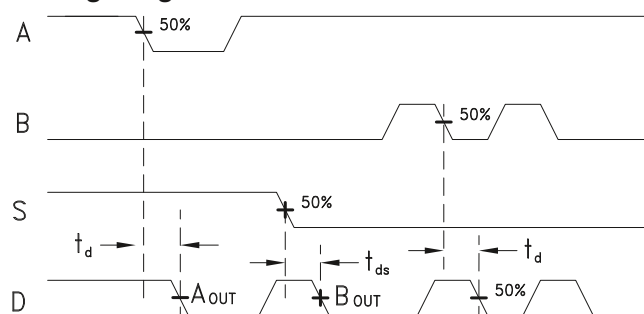
[1] Test Conditions:

Waveform generated with an Agilent N4903A J-Bert.

Rate = 10 Gbps

Eye Diagram data presented on a Tektronix CSA 8000

### Timing Diagram



$t_d$  = propagation delay, A or B to DOUT

$t_{ds}$  = propagation delay, Select to DOUT

### Truth Table

| Inputs                                                   | Outputs |
|----------------------------------------------------------|---------|
| S                                                        | DP      |
| H                                                        | A -> D  |
| L                                                        | B -> D  |
| H - Positive voltage level<br>L - Negative voltage level |         |
| Notes:<br>D = DP - DN<br>S = SP - SN                     |         |



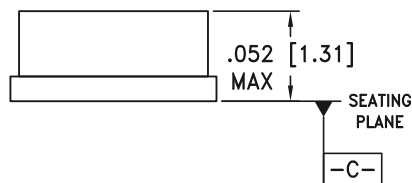
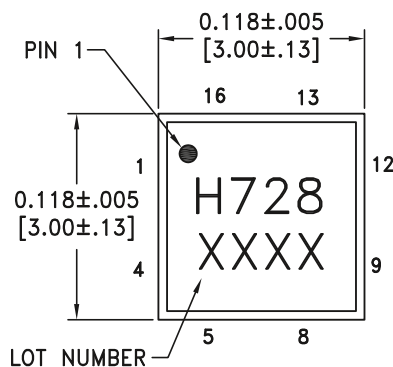
### Absolute Maximum Ratings

|                                                                                    |                   |
|------------------------------------------------------------------------------------|-------------------|
| Power Supply Voltage (Vee)                                                         | -3.75 V to +0.5 V |
| Input Signals                                                                      | -2 V to +0.5 V    |
| Output Signals                                                                     | -1.5 V to +1 V    |
| Continuous Pdiss (T = 85 °C)<br>(derate 17 mW/°C above 85 °C)                      | 0.68 W            |
| Thermal Resistance (R <sub>th j-p</sub> ) Worst<br>case junction to package paddle | 59 °C/W           |
| Maximum Junction Temperature                                                       | 125 °C            |
| Storage Temperature                                                                | -65 °C to +150 °C |
| Operating Temperature                                                              | -40 °C to +85 °C  |
| ESD Sensitivity (HBM)                                                              | Class 1C          |

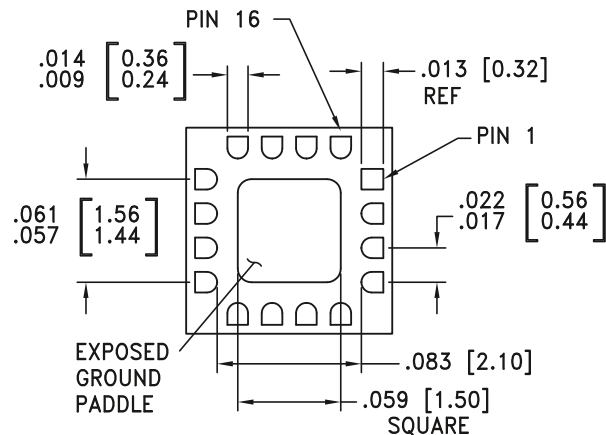


**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing



### BOTTOM VIEW



#### NOTES:

1. PACKAGE BODY MATERIAL: ALUMINA
2. LEAD AND GROUND PADDLE PLATING:  
30-80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKEL.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
5. PACKAGE WARP SHALL NOT EXCEED 0.05 mm DATUM -C-
6. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.
7. PADDLE MUST BE SOLDERED TO GND.

### Package Information

| Part Number | Package Body Material | Lead Finish      | MSL Rating          | Package Marking <sup>[2]</sup> |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC728LC3C  | Alumina, White        | Gold over Nickel | MSL3 <sup>[1]</sup> | H728<br>XXXX                   |




[1] Max peak reflow temperature of 260 °C

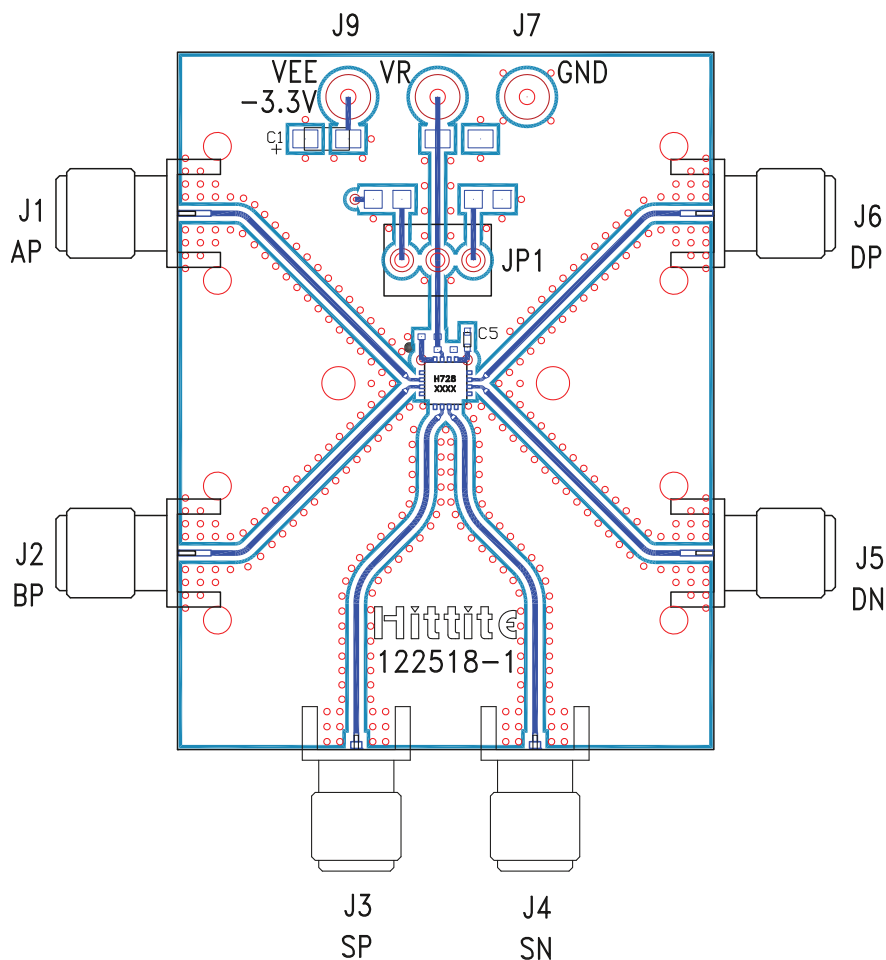
[2] 4-Digit lot number XXXX

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc.,  
One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D

## Pin Descriptions

| Pin Number          | Function | Description                                                                        | Interface Schematic                                                                   |
|---------------------|----------|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1, 4, 5, 8, 9, 12   | GND      | Signal Grounds.                                                                    |    |
| 2, 3                | AP, BP   | Single-Ended Data Inputs: Current Mode Logic (CML) referenced to positive supply.  |    |
| 6, 7                | SP, SN   | Differential Select Inputs: Current Mode Logic (CML) referenced to positive supply |    |
| 10, 11              | DP, DN   | Differential Data Outputs: Common Mode Logic (CML) referenced to positive supply.  |   |
| 13, 16              | Vee      | Negative Supply                                                                    |                                                                                       |
| 14,<br>Package Base | GND      | Supply Ground                                                                      |  |
| 15                  | N/C      | No Connection                                                                      |                                                                                       |

**Evaluation PCB**

**List of Materials for Evaluation PCB 122520 [1]**

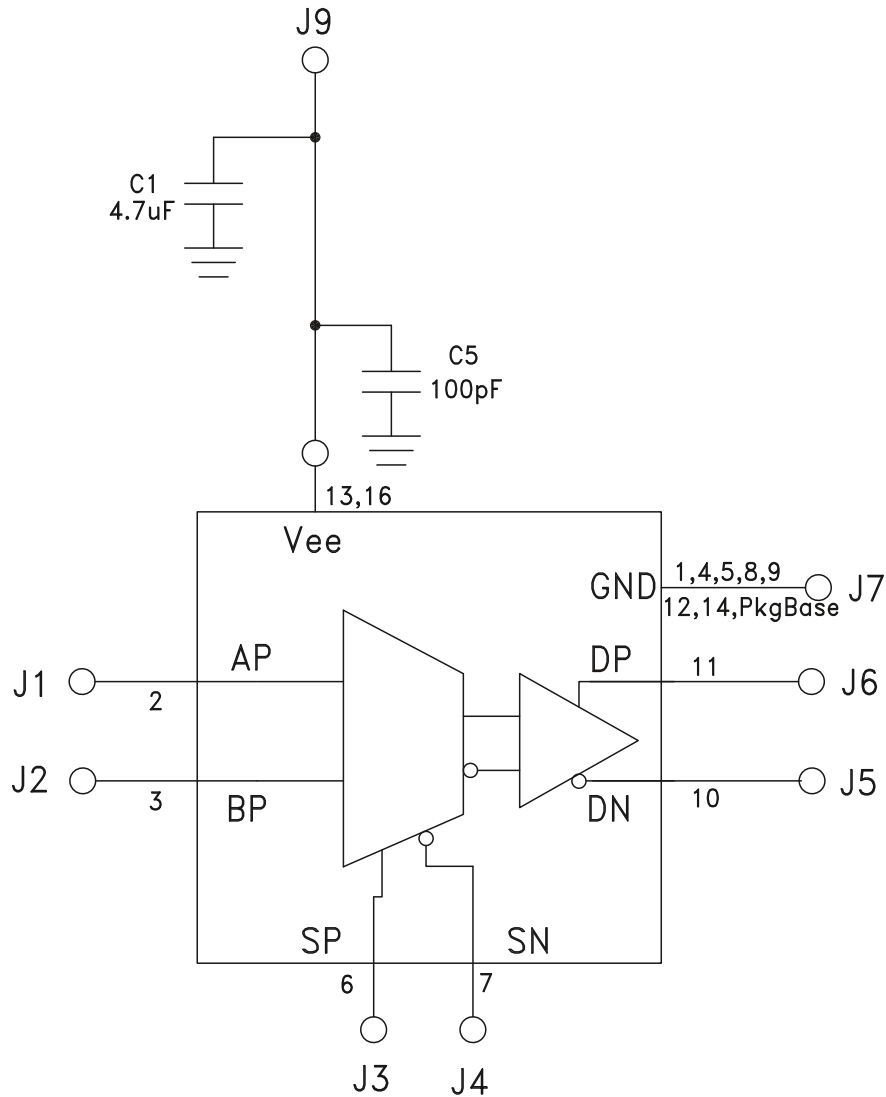
| Item    | Description                                  |
|---------|----------------------------------------------|
| J1 - J6 | PCB Mount SMA RF Connectors                  |
| J7, J9  | DC Pin                                       |
| C1      | 4.7 $\mu$ F Capacitor, Tantalum              |
| C5      | 100 pF Capacitor, 0402 Pkg.                  |
| U1      | HMC728LC3C<br>High Speed Logic, 2:1 Selector |
| PCB [2] | 122518 Evaluation Board                      |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads should be connected directly to the ground plane similar to that shown. The exposed package base should be connected to GND. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

**Application Circuit**



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[122520-HMC728LC3C](#) [HMC728LC3C](#) [HMC728LC3CTR](#) [HMC728LC3CTR-R5](#)