

OPTICAL AMPLIFIERS SELECTION GUIDE

Finisar offers a wide selection of optical amplifiers, ranging in optical and electrical specification parameters, and in a variety of form factors and communications interfaces.

This selection guide seeks to help end-users to identify the amplifier(s) that best suit their application needs by providing an “at a glance” comparison of the specification parameters.

The part numbers referenced in the following tables represent a small portion of the full capabilities and offerings of our optical amplifier families. These tables include only the products that are available for purchase by any customer. Customized solutions for special applications are available upon request.

I UltraSpan® EDFAs

Finisar’s UltraSpan® family of optical amplifiers offer the power of optical amplification in a user-friendly, network-interfaced, rack-mountable platform. They are ideal for field deployment and integration in new or existing network elements. UltraSpan amplifiers can provide stand-alone amplification or work in conjunction with existing systems, complementing or enhancing their performance capabilities.



Parameter	P/N→	FOA-M2200PB-EFG1C-AA015		FOA-R2100PB-EPB2C-AA010		FOA-M2000PB-EFG2C-AA066	
	Unit	Specification		Specification		Specification	
		Min	Max	Min	Max	Max	Max
Form Factor	mm	1RU Rack Mount 442x240x43.6		1RU Rack Mount 442x240x43.6		1RU Rack Mount 442x240x43.6	
Amplifier Type	-	WDM FGA		WDM FGA PowerBooster with OSC EDFA		Dual WDM FGA EDFAs	
Operating Wavelength Range	nm	1529.1	1564.2	1529.1	1564.2	1530	1564
Input Power Range	dBm	-15	12	-5	21	-35	3
Output Power Range	dBm	-2	18	5	26	-8	20
Saturated Output Power	dBm	17		25.5		20	
Settable Gain Range	dB	5	18	5.5	6.5	17	29
Optimal Flat Gain	dB	17		6		23	
Gain/Power Setting Accuracy	dB	-0.5	+0.5		±0.5		±0.5
Gain Flatness vs. Wavelength	dB		±0.6		±0.75		±0.6
Dynamic gain tilt	dB/dB		0.85	N/A			0.9
Gain / Power Stability	dB		±0.1		±0.1		±0.1
Noise Figure (at OFG or equivalent)	dB		6.5		9		6
Return loss	dB	40		40		40	
PDG	dB		0.3		0.4		0.3
PMD	ps		0.3		0.2		0.3
Multi-Path Interference	dB		-40		-40		-40
Laser Safety Classification	-	Class 1M		Class 1M with APR		Class 1M	
Optical Connectors	-	2: In, Out		3: In, Out, Monitor Out		2: In, Out	
Operating Modes	-	AGC, APC, Manual		APC, Manual		AGC, APC, Manual	
Power Supply Voltage	V	110 (AC)	240 (AC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)
Power Consumption	W		40		55		50
Operating Case Temperature	°C	-5	55	-5	55	-5	55
Communications Protocol	-	Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132	
Interface	-	SNMP v2 or web- based GUI		SNMP v2 or web- based GUI		SNMP v2 or web- based GUI	
Ethernet cable P/N	-	18-10-0138R		18-10-0138R		18-10-0138R	
Power Cable P/N	-	1133098 (US AC) 1133099 (EU AC)		18-10-0089R		18-10-0089R	
19" Brackets Kit P/N	-	50-60-0102-01R		50-60-0102-01R		50-60-0102-01R	
21" Brackets Kit P/N	-	50-60-0103-01R		50-60-0103-01R		50-60-0103-01R	
23" Brackets Kit P/N	-	50-60-0104-01R		50-60-0104-01R		50-60-0104-01R	
ETSI Brackets Kit P/N	-	50-60-0105-01R		50-60-0105-01R		50-60-0105-01R	

II Ultraspan Raman and ROPA

Finisar’s Ultraspan® family of Raman and ROPA optical amplifiers offer the power of optical amplification in a user-friendly, network-interfaced, rack-mountable platform ideal for field deployment and integration in new or existing network elements. Ultraspan amplifiers can provide stand-alone amplification or work in conjunction with existing systems, complementing or enhancing their performance capabilities.

Parameter	P/N→ Unit	1RU Platform						3RU Platform							
		FOA-R9100PR-RBW2C-AA003		FOA-R9100PR-RBW3C-AA004		FOA-R9200PR-RFW3C-AA037		FOA-R9400PR-RPA3C-AA001		FOA-R9100SA-RBW6C-AA016		FOA-R9100SA-RBW6C-AA015		FOA-R9400SA-RPA6C-AA017	
		Specification		Specification		Specification		Specification		Specification		Specification		Specification	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Form Factor	mm	1RU Rack Mount 442x240x43.6		1RU Rack Mount 442x240x43.6		1RU Rack Mount 442x240x43.6		1RU Rack Mount 442x240x43.6		3RU Rack Mount 448x239x132.4		3RU Rack Mount 448x239x132.4		3RU Rack Mount 448x239x132.4	
Amplifier Type	-	Counter-Propagating Raman Amplifier		Counter-Propagating Raman Amplifier		Co-Propagating Raman Amplifier		ROPA Pump Unit		Counter-Propagating Raman Amplifier		Co-Propagating Raman Amplifier		ROPA Pump Unit	
Operating Wavelength Range	nm	1528	1567	1529	1564	1529.2	1564.2	1533	1565	1528.2	1566.5	1528.2	1566.5	1532	1566.5
Total Pump Power	mW	450	490	680	710	680	710	800	840	1600	2000	1600	2000	1600	2000
Input Signal Power Range (pumps off)	dBm	-45	-10	-44	5	-10	26	N/A		-50	5	-10	23	-45	5
Signal Insertion Loss	dB		1.6		1.8		1.8		1.6		1.8		2		2
Nominal Gain for G.652	dB		10		14.5		9	N/A			30		27	22	
Nominal Gain for Leaf	dB		13		17.5		10	N/A			N/A		N/A	N/A	
Nominal Gain for TrueWave	dB		15		20		11.5	N/A			N/A		N/A	N/A	
Nominal Gain for TeraLight	dB		14		19		N/A	N/A			N/A		N/A	N/A	
Spectral Gain Flatness	dB		1		1.2		1.2	N/A		1.5	2.0		N/A	N/A	
Effective Noise Figure	dB		-1		-0.5		N/A	N/A		-4	-2.5		N/A	N/A	
OSC Wavelength Range	nm	1500	1520	1500	1520	1500	1520	1500	1520	1500	1520	1500	1520	1500	1520
Raman Gain at OSC Wavelength	dB	5		10		6		N/A		15		12		N/A	
OSC Insertion Loss	dB		2.5		1.8		1.8		1.8		1.8		1.8		1.8
Return loss	dB	40		40		40		40		40		40		40	
PDL	dB		0.15		0.15		0.15		0.15		0.2		0.2		0.2
PDG	dB		0.6		0.2		0.2	N/A			0.3		0.3		0.3
PMD	ps		0.2		0.2		0.2		0.2		0.2		0.2		0.2
RIN (any pump)	dB/Hz		-110		-110		-115		-110		-110		-110		-110
Laser Safety Classification	-	Class 1M		Class 1M with APR		Class 1M with APR		Class 1M with APR		Class 1M with APR		Class 1M with APR		Class 1M with APR	
Optical Connectors	-	4: In, Out, Monitor in, Monitor Out		3: In, Out, Monitor Out		3: In, Out, Input Monitor		3: In, Out, Output Monitor		3: In, Out, Output Monitor		3: In, Out, Output Monitor		3: In, Out, Output Monitor	
Operating Modes	-	AGC, Manual		AGC, Manual		AGC, Manual		Manual		AGC, Manual		AGC, Manual		Manual	
Power Supply Voltage	V	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)	-76 (DC)	-36 (DC)
Power Consumption	W		55		55		55		155		155		155		155
Operating Case Temperature	°C	-5	55	-5	55	-5	55	-5	55	-5	55	-5	55	-5	55
Communications Protocol	-	Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132		Ethernet and RS-2132	
Interface	-	SNMP v2 or web-based GUI		SNMP v2 or web-based GUI		SNMP v2 or web-based GUI		SNMP v2 or web-based GUI		SNMP v2 or web-based GUI		SNMP v2 or web-based GUI		SNMP v2 or web-based GUI	
Ethernet cable P/N	-	18-10-0138R		18-10-0138R		18-10-0138R		18-10-0138R		18-10-0138R		18-10-0138R		18-10-0138R	
Power Cable P/N	-	18-10-0048R		18-10-0048R		18-10-0089R		18-10-0089R		18-10-0089R		18-10-0089R		18-10-0089R	
19" Brackets Kit P/N	-	50-60-0102-01R		50-60-0102-01R		50-60-0102-01R		50-60-0102-01R		50-60-0102-01R		50-60-0102-01R		50-60-0102-01R	
21" Brackets Kit P/N	-	50-60-0103-01R		50-60-0103-01R		50-60-0103-01R		50-60-0103-01R		50-60-0103-01R		50-60-0103-01R		50-60-0103-01R	
23" Brackets Kit P/N	-	50-60-0104-01R		50-60-0104-01R		50-60-0104-01R		50-60-0104-01R		50-60-0104-01R		50-60-0104-01R		50-60-0104-01R	



3RU Platform




1RU Platform



Parameter	P/N→	FOA-R9100PR-RBW2C-AA003	FOA-R9100PR-RBW3C-AA004	FOA-R9200PR-RFW3C-AA037	FOA-R9400PR-RPA3C-AA001	FOA-R9100SA-RBW6C-AA016	FOA-R9100SA-RBW6C-AA015	FOA-R9400SA-RPA6C-AA017					
	Unit	Specification		Specification		Specification		Specification		Specification		Specification	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
ETSI Brackets Kit P/N	-	50-60-0105-01R		50-60-0105-01R		50-60-0105-01R		50-60-0105-01R		50-60-0105-01R		50-60-0105-01R	

III Fixed Gain Amplifiers (FGAs)

Finisar’s Fixed Gain Amplifiers (FGAs) are typically single-stage EDFAs whose gain spectrum is either non-flattened, or flattened at a specific gain setting (Optimal Flat Gain). They can be used as boosters at the transmission side of a link, preamplifiers at the receive side, or inline amplifiers at the mid-span. Output power and gain can be controlled by the end user, and gain tilt occurs whenever the set gain differs from the OFG. In the following table “Single Channel” refers to non-gain flattened amplifiers, WDM to gain flattened ones.

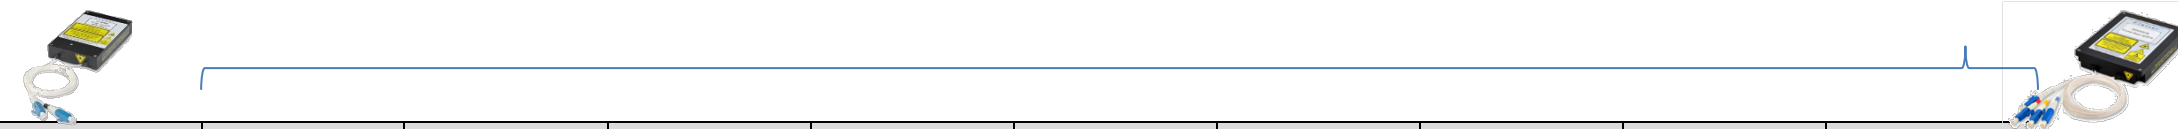

Parameter	P/N→	FOA-M1100MB-ESC1C-AA001	FOA-M1500CB-ESC1C-AA011	FOA-M2200CB-EFG1C-AA002	FOA-M2200CB-EFG1C-AA003	FOA-M2200CB-EFG1C-AA004	FOA-M2200CB-EFG1C-AA005	FOA-M2200CB-EFG1C-AA006	FOA-M2200CB-EFG1C-AA007	FOA-M2200CB-EFG1C-AA008	FOA-M2300CD-EFV1C-AA009												
	Unit	Specification		Specification		Specification		Specification		Specification		Specification											
		Min	Max	Min	Max	Max	Max	Max	Max	Max	Max	Max	Max										
Form Factor	mm	70x45x12		90x70x15		90x70x15		90x70x15		90x70x15		90x70x15											
Amplifier Type	-	Single Channel		OSC EDFA		WDM FGA		WDM FGA		WDM FGA		WDM FGA + Output VOA											
Operating Wavelength Range	nm	1528.77	1567.13	1504.5	1517.5	1529	1563	1528.77	1564	1528.77	1565	1529	1563	1529.5	1563								
Input Power Range	Booster mode	dBm	-10	5	-2	7	-27	2	-25	8	-35	-5	-24	5	-25	10	-25	10	-25	8	-18	2	
	Pre-amp mode																						
Output Power Range	Booster mode	dBm	5	16	13	-7	17	-7	17.4	-7	17	-7	17	-5	20	-5	21	-5	21	-5	20.8	-15	19
	Pre-amp mode																						
Saturated Output Power	dBm	16		+13		17		17.4		17		20		20		20		20		21		19	
Settable Gain Range	Booster mode	dB	5	26	N/A	N/A	10	20	4	28	15	30	10	20	15	25	10	26	10	20	0	20	
	Pre-amp mode																						VOA, not gain range
Optimal Flat Gain	dB	N/A		N/A		15		23		23		15		22		26		20		22			
Gain/Power Setting Accuracy	Booster mode	dB	-0.5	+0.5	-0.5	+1	-0.5	0.5	-0.5	0.5	-0.5	0.5	-0.5	0.5	-0.5	0.5	-0.5	0.5	-0.5	0.5	-0.5	0.5	
	Pre-amp mode																						
Gain Flatness vs. Wavelength	dB	N/A		N/A		±0.6		±0.6		±0.5		±0.6		±0.6		±0.6		±0.6		1.5pk-pk			
Dynamic gain tilt	dB/dB	N/A		N/A		±0.06		0.9		0.9		0.9		0.9		0.9		0.9		0.9			
Gain / Power Stability	dB	-0.2	0.2	-0.1	0.1	±0.1		±0.1		±0.1		±0.1		±0.1		±0.1		±0.1		±0.1			
Noise Figure (at OFG or equivalent)	dB		6.5		8		6		5.5		5.5		6		5.5		5.5		5.5		5.5		
Return loss	dB	40		40		40		40		40		40		40		40		40		40		40	
PDG	dB		0.5		0.3		0.5		0.4		0.3		0.5		0.4		0.4		0.5		0.5		
PMD	ps		0.3		0.15		0.3		0.2		0.3		0.3		0.2		0.2		0.3		0.3		
Multi-Path Interference	dB		-40		-40		-40		-40		-40		-40		-40		-40		-40		-40		
Laser Safety Classification	-	Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M			
Optical Connectors	-	2: In, Out		2: In, Out		2: In, Out		3: In, Out, Out Mon		3: In, Out, Out Mon		2: In, Out		3: In, Out, Out Mon		3: In, Out, Out Mon		3: In, Out, Out Mon		3: In, Out, Out Mon			
Operating Modes	-	APC, Manual		APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual			
Power Supply Voltage	V	2.97	3.63	3.13	3.46	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25	3.15	3.45	4.75	5.25		
Power Consumption	W		2.5		9.5		8		8		8		11		11		8		12		8		
Operating Case Temperature	°C	0	70	0	70	0	70	0	70	0	70	0	70	0	70	0	70	0	70	0	70		
Communications Protocol	-	RS-232		RS-232		RS-232		RS-232		RS-232 LVTTTL		RS-232		RS-232 LVTTTL		RS-232 LVTTTL		RS-232		RE-232 LVTTTL			
Default Baud Rate	Baud	9600		19200		19200		9600		19200		19200		19200		19200		19200		57600			
Eval Board P/N	-	1178581		1192393		1192393		1192393		1192393		1192393		1192393		1192393		1192393		1192392			

Parameter	P/N→	FOA-M1100MB-ESC1C-AA001	FOA-M1500CB-ESC1C-AA011	FOA-M2200CB-EFG1C-AA002	FOA-M2200CB-EFG1C-AA003	FOA-M2200CB-EFG1C-AA004	FOA-M2200CB-EFG1C-AA005	FOA-M2200CB-EFG1C-AA006	FOA-M2200CB-EFG1C-AA007	FOA-M2200CB-EFG1C-AA008	FOA-M2300CD-EFV1C-AA009		
	Unit	Specification		Specification		Specification		Specification		Specification		Specification	
		Min	Max	Min	Max	Max	Max	Max	Max	Max	Max	Max	Max
Eval Board Cable P/N	-	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	18-10-0006R	

IV Variable Gain Amplifiers (VGAs)

Finisar’s compact Variable Gain Amplifiers (VGAs) are available in two form factors. Compact VGAs combine the ubiquity of the EDFA MSA form factor (90x70mm) with the advanced feature of a variable gain range; with up to 20dBm output power. Other VGAs with a larger form factor enable more complex functions and higher output power (up to 23dBm). VGAs find their application as booster, pre, or inline amplifiers, and are all suitable for WDM applications, their gain spectrum being flat.



Parameter	P/N→ Unit	FOA-M7300CD- EVG1C-AA002	FOA-M7300CD- EVG1C-AA003	FOA-M7300CD- EVG1C-AA004	FOA-M7100DA- EVG2C-AA013	FOA-M7100DA- EVG2C-AA014	FOA-R7100DA- EVG2C-AA015						
		Specification		Specification		Specification		Specification		Specification			
		Min	Max	Min	Max	Max	Max	Max	Max	Max	Max		
Form Factor	mm	90x70x16.5		90x70x16.5		90x70x16.5		100x150x18		100x150x18		100x150x18	
Amplifier Type	-	WDM VGA		WDM VGA		WDM VGA with Mid-stage access		WDM VGA with Mid-stage access		WDM VGA with Mid-stage access		WDM VGA with Mid-stage access	
Operating Wavelength Range	nm	1529.5	1564	1529.5	1564	1529.5	1564	1529.5	1564	1529.5	1564	1529.5	1564
Input Power Range	dBm	-38	5	-27	10	-27	8	-40	-3.5	-42	5	-38	6
Output Power Range	dBm	-8	17	-8	19.5	-8	18	-2	20.5	-5	20.5	-2	23
Saturated Output Power	dBm	17		19.5		18			17.4	20.5		23	
Gain Range	dB	15	30	10	25	10	25	25	40	17	40	17	40
Gain/Power Setting Accuracy	dB	-0.25	+0.25	-0.25	+0.25	-0.25	+0.25	-0.5	0.5	-0.4	0.4	-0.4	0.4
Gain Flatness vs. Wavelength	dB		±0.6		±0.6		±0.6		±0.6		±0.6		±0.6
Gain / Power Stability	dB		±0.1		±0.1		±0.1		±0.1		±0.2		±0.2
Settable Gain Tilt Range	dB	-2	2	-2	2	-2	2	-3.5	0	-2	0	-2	0
Mid-Stage Loss	dB	N/A		N/A		0	4	4	9	4	9.5	4	9.5
Noise Figure ¹	dB	5.5	11.5	5.6	14.5	18.5	5.8	7.2	6.1	5.6	12.5	6.6	16.3
Return loss	dB	40		40		40		45		40		40	
PDG	dB		0.3		0.3		0.3		0.3		0.3		0.5
PMD	ps		0.3		0.3		0.3		0.2		0.2		0.3
Multi-Path Interference	dB		-40		-40		-40		-40		-40		-40
Laser Safety Classification	-	Class 1M		Class 1M		Class 1M		Class 1M		Class 1M		Class 1M with APR	
Optical Connectors	-	3: In, Out, Out Mon		2: In, Out; 3: In, Out, Out Mon		5: In, out, Out mon, MSA in, MSA Out		5: In, out, Out mon, MSA in, MSA Out		5: In, out, Out mon, MSA in, MSA Out		5: In, out, Out mon, MSA in, MSA Out	
Operating Modes	-	AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual		AGC, APC, Manual	
Power Supply Voltage	V	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25	4.75	5.25
Power Consumption	W		10		13		11		17		17		26
Operating Case Temperature	°C	0	70	0	70	0	70	0	70	0	70	0	70
Communications Protocol	-	RS-232		RS-232		RS-232 LVTTTL		RS-232 LVTTTL		RS-232 LVTTTL		RS-232 LVTTTL	
Default Baud Rate	Baud	19200		19200		9600		19200		19200		19200	
Eval Board P/N	-	1192393		1192393		1192393		50-45-0069-01R		50-45-0069-01R		50-45-0069-01R	
Eval Board Cable P/N	-	18-10-0006R		18-10-0006R		18-10-0006R		18-10-0006R		18-10-0006R		18-10-0006R	

Notes

1. Max NF at minimum gain setting; min NF at maximum gain setting

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Finisar:

[FOA-M1000PB-EFG2C-AA028](#) [FOA-M2200PB-EFG1C-AA069](#)