

High Frequency Ceramic Solutions

868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 1 of 11


General Specifications

Part Number	0900AT43A0070
Frequency (MHz)	858 - 928
Peak Gain (dBi)	-0.5 typ. (XZ-Total)
Average Gain (dBi)	-2.5 typ. (XZ-Total)
Radiated Efficiency*	48% ave.
Return Loss (dB)	4 min.
Impedance (Ω)	50
Input Power (W)	2 max. (CW)
Operating Temperature	-40 to +85°C
Recommended Storage Conditions and Period for unused T&R Product	+5 to +35°C Humidity 45 - 75% RH 18 months max.
Reel Quantity (pcs/reel)	1,000

*Efficiency based on evaluation board 0900AT43A0070-EB2SMA, Layout# 2, page 6

Let us help you with the antenna design, optimization, and tuning!

<https://www.johansontechnology.com/ask-a-question>

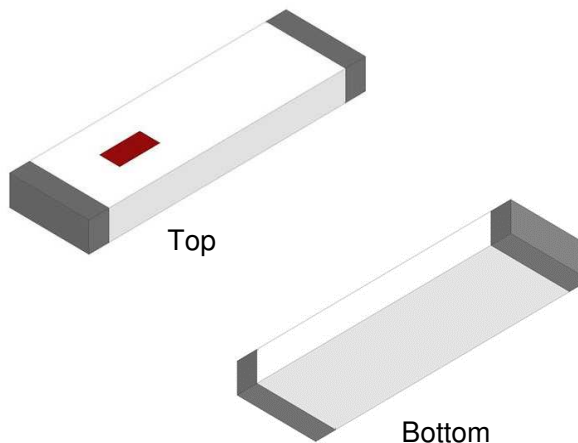


Part Number Explanation


P/N Suffix	Packing Style	Bulk (loose pcs)	Suffix = S	e.g. 0900AT43A0070S
		T & R	Suffix = E	e.g. 0900AT43A0070E
		100% Tin	Suffix = None	e.g. 0900AT43A0070(E or S)
	Evaluation Board	Layout Recommendation #1 - 0900AT43A0070-EB1SMA, see page 2		
		Layout Recommendation #2 - 0900AT43A0070-EB2SMA, see page 6		

Mechanical Dimensions

	In	mm
L	0.276 \pm 0.008	7.00 \pm 0.20
W	0.079 \pm 0.008	2.00 \pm 0.20
T	0.031 \pm 0.004 / -0.008	0.80 \pm 0.10 / -0.20
a	0.020 \pm 0.012	0.50 \pm 0.30




Top View



Side View

Terminal Configuration

No.	Function
1	RF Feeding Point
2	To trace element

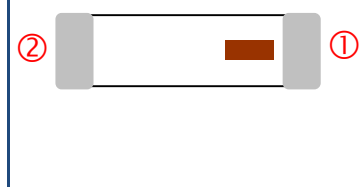

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021


Page 2 of 11

Layout Recommendation #1: Evaluation Board p/n: 0900AT43A0070-EB1SMA

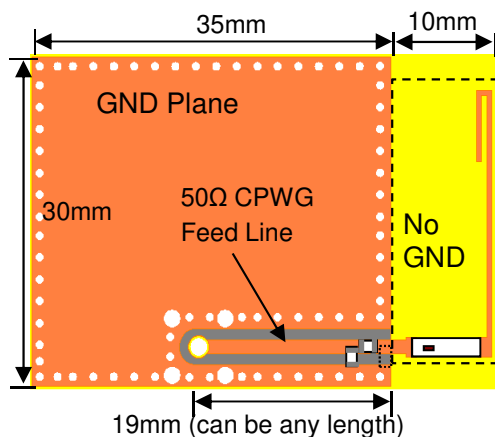

- Orderable EVB for evaluation, it comes with a female SMA connector. Go to: <https://www.johansontechnology.com/request-a-sample> and ask for p/n 0900AT43A0070-EB1SMA

- The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB.

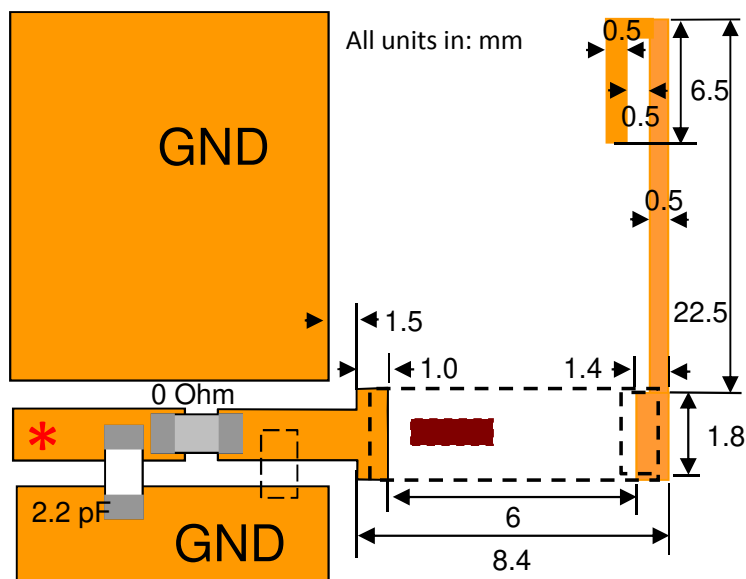

- Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

- Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: <https://www.johansontechnology.com/ask-a-question>

* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND)

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

868 and 915MHz dual (wideband) ISM band SMD chip antenna


P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 3 of 11

Typical Electrical Performance (T=25°C) on Layout Recommendation #1

Return Loss (with matching)

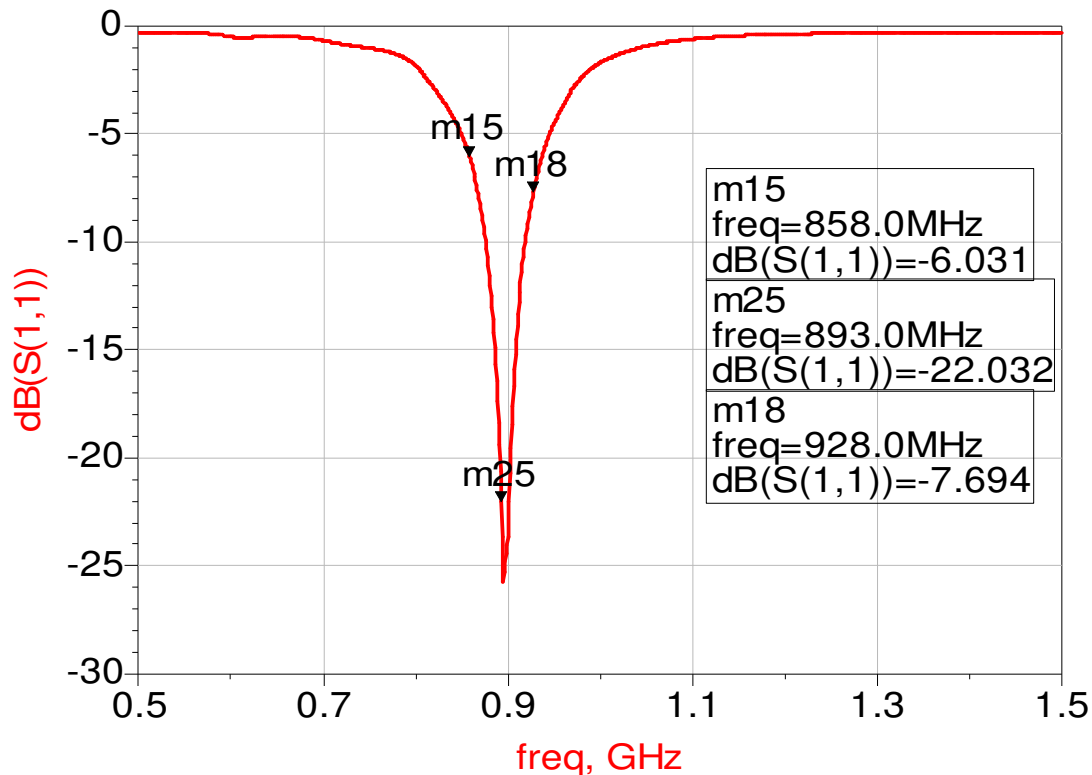

This antenna has about 20MHz of guard-band on each side.

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070


Detail Specification: 1/29/2021

Page 4 of 11


Typical Radiation Patterns (T=25°C) of Layout Recommendation #1

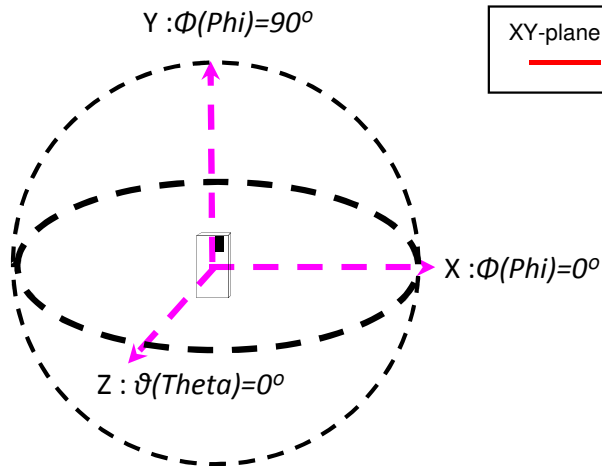


XY-plane @868MHz
— Total

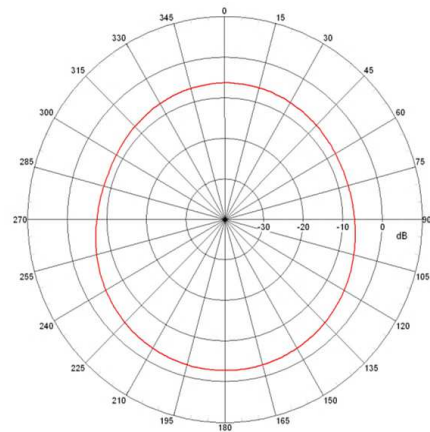

XZ-Plane @868MHz
— Total

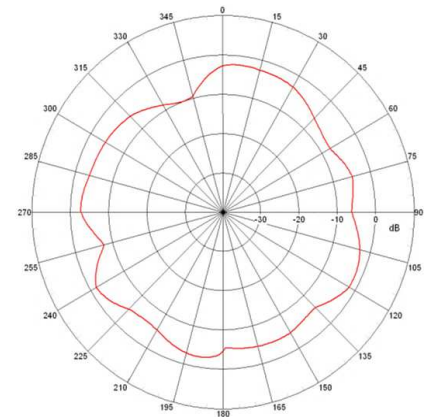

YZ-Plane @868MHz
— Total

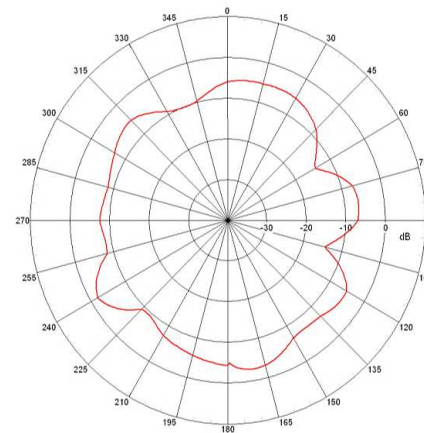

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 2.0

<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 5 of 11

Typical Radiation Patterns (T=25°C) of Layout Recommendation #1

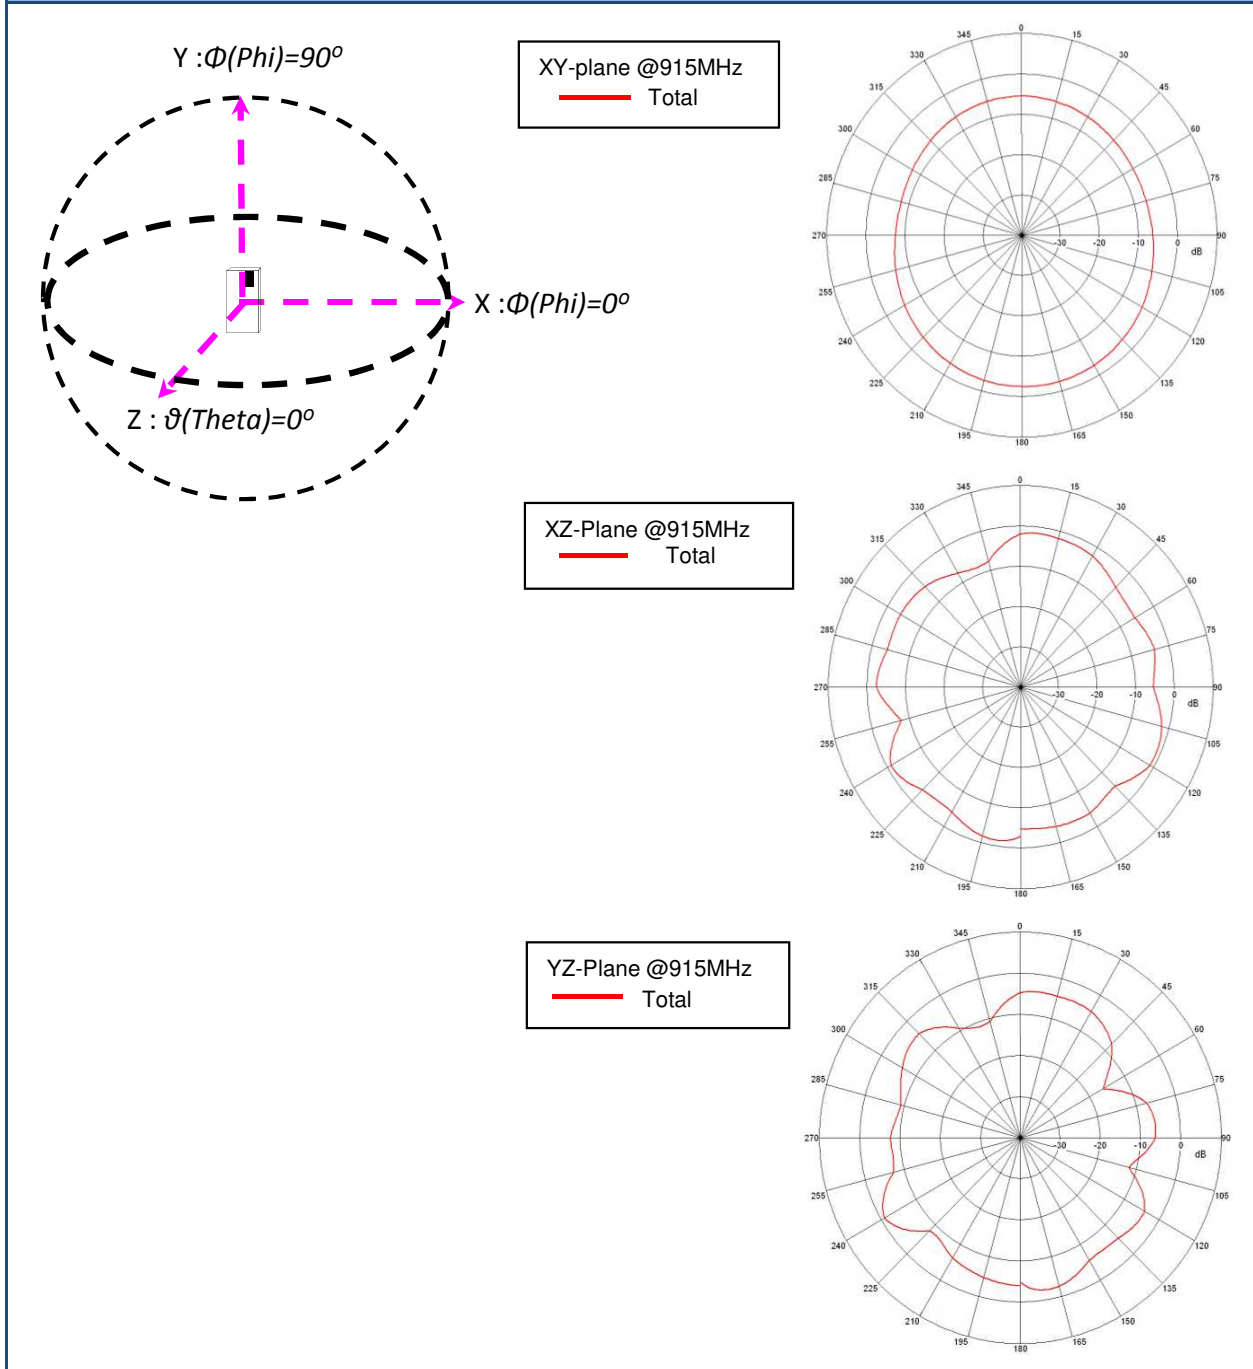

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021


Page 6 of 11

Layout Recommendation #2: Evaluation Board p/n: 0900AT43A0070-EB2SMA

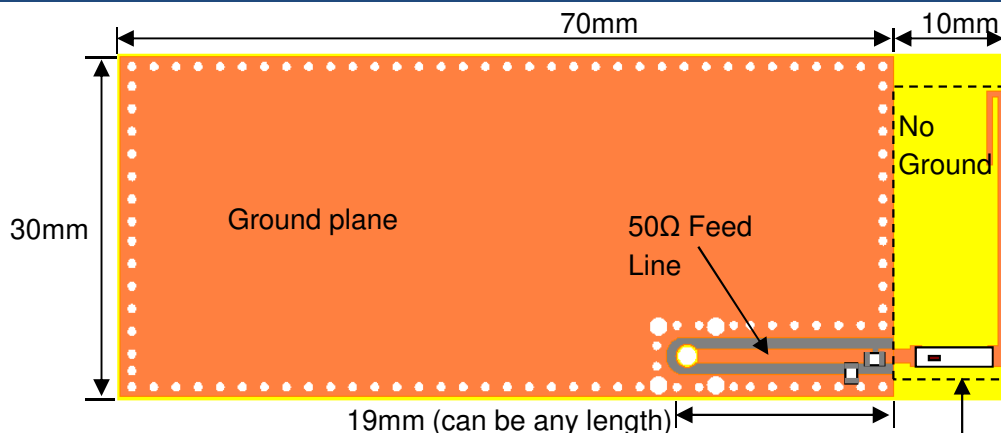

• Orderable EVB for evaluation, it comes with a female SMA connector. Go to: <https://www.johansontechnology.com/request-a-sample> and ask for p/n 0900AT43A0070-EB2SMA

• The total antenna area usage for this EVB is approx. 25x10mm (due to trace element), but the trace can be re-shaped to reduce effective area and conform to the designer's PCB!

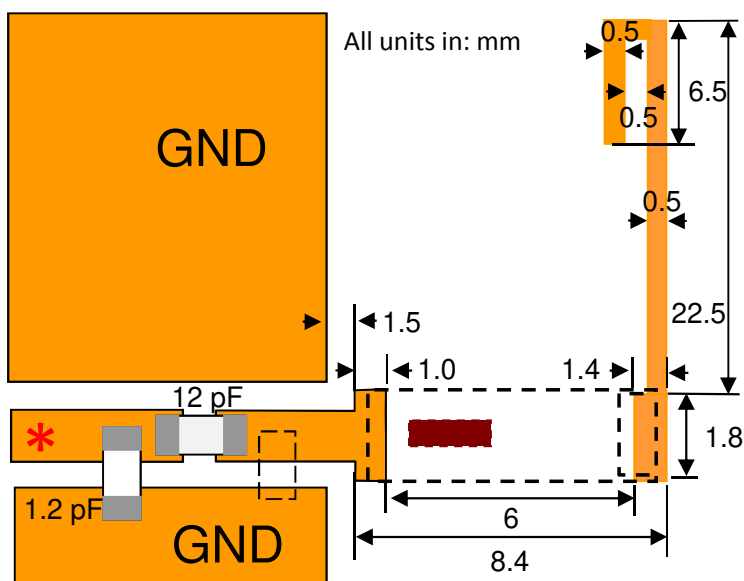

* Line width should be designed to match 50ohm characteristic impedance, depending on your PCB material and thickness (distance to GND)

• Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.

• Need help laying out the antenna, want us to review your antenna design (free!), require the Gerber files for this EVB, or would like us to validate the new tuning values of your PCB (fee may apply) go to: <https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

868 and 915MHz dual (wideband) ISM band SMD chip antenna


P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 7 of 11

Typical Electrical Performance (T=25°C) on Layout Recommendation #2

Return Loss (with matching)

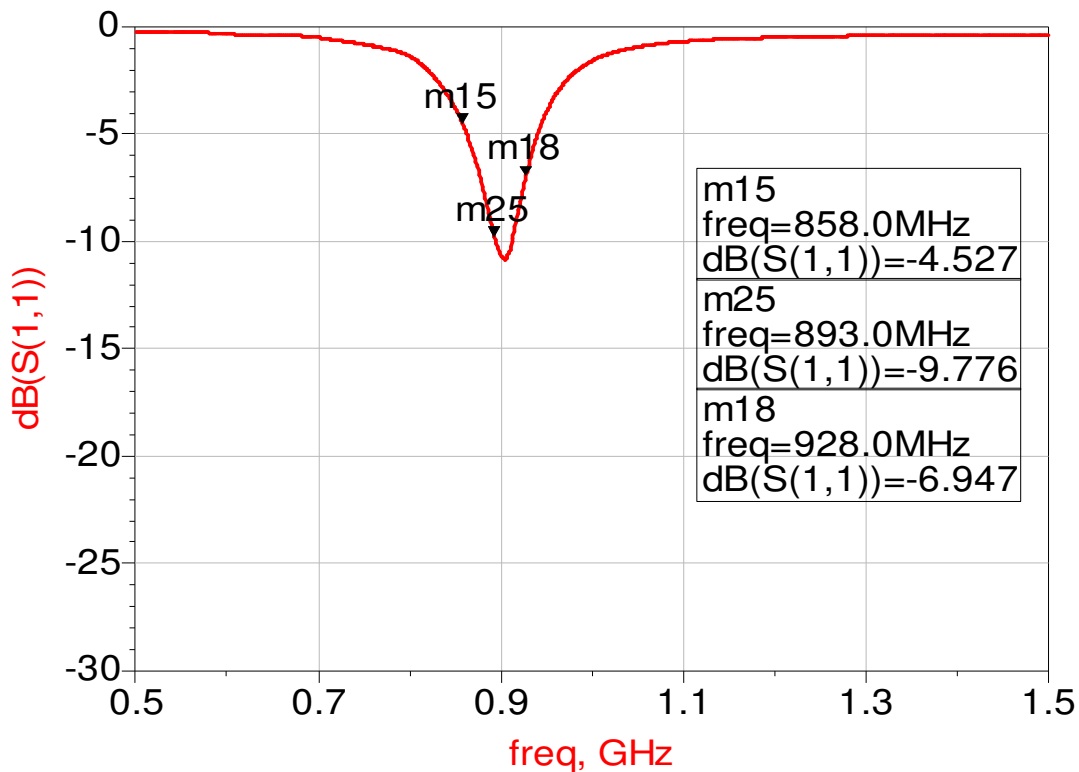

This antenna has about 20MHz of guard-band on each side.

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070


Detail Specification: 1/29/2021

Page 8 of 11


Typical Radiation Patterns (T=25°C) of Layout Recommendation #2

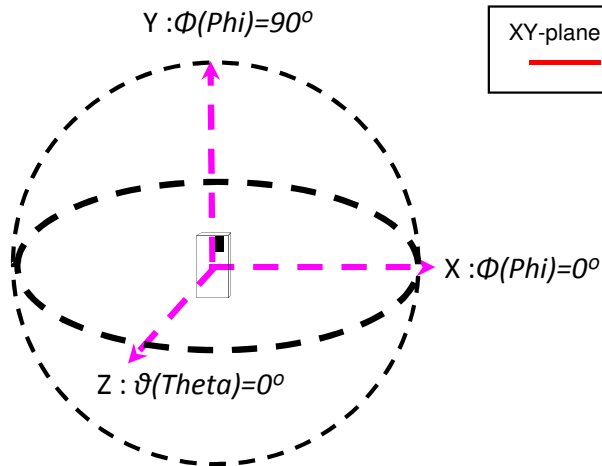


XY-plane @868MHz
— Total

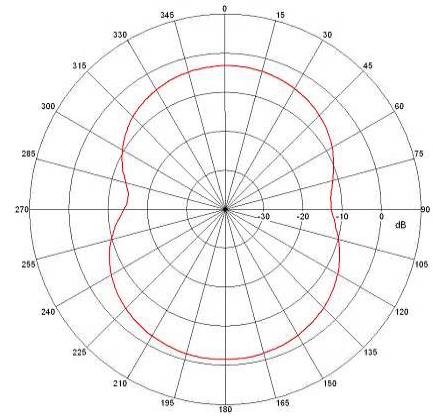

XZ-Plane @868MHz
— Total

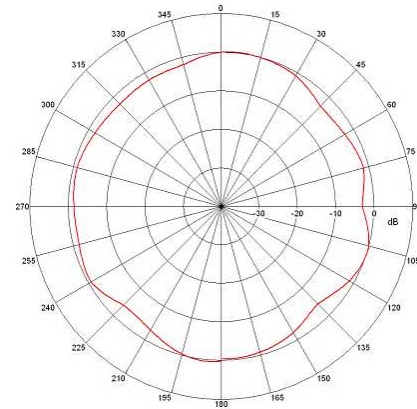

YZ-Plane @868MHz
— Total

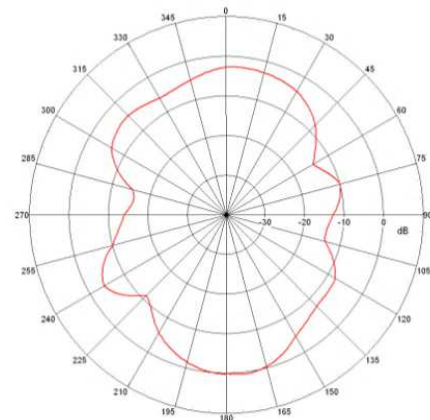

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070


Detail Specification: 1/29/2021

Page 9 of 11


Typical Radiation Patterns (T=25°C) of Layout Recommendation #2

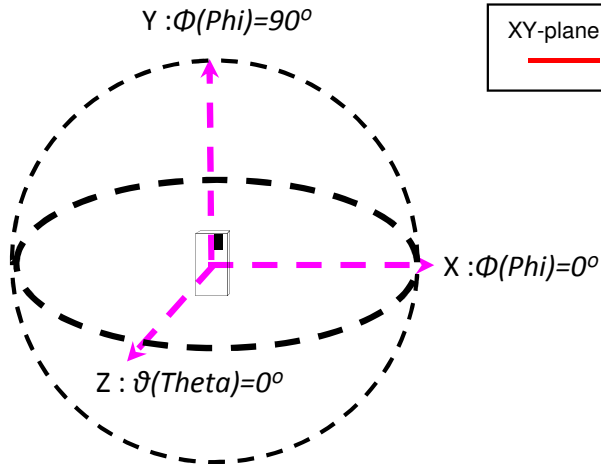


XY-plane @915MHz
— Total

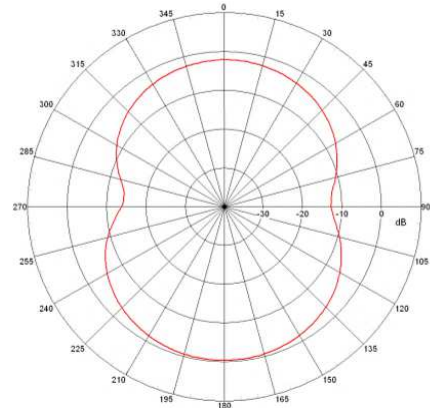

XZ-Plane @915MHz
— Total

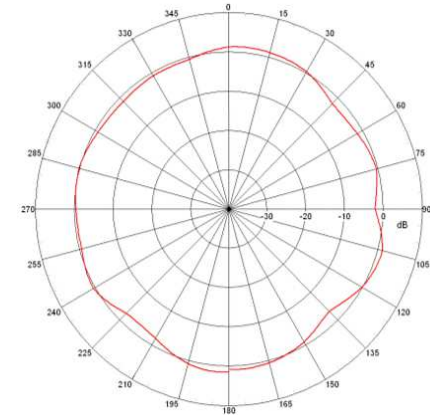

YZ-Plane @915MHz
— Total

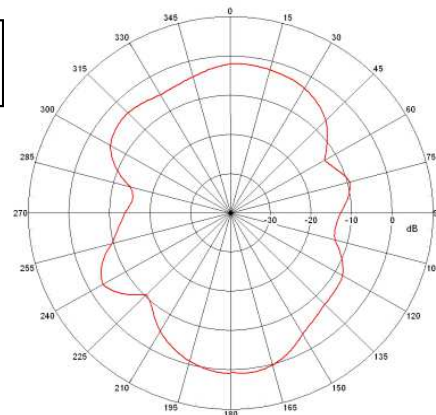

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 2.0 2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 10 of 11

Alternative layout with reduced effective area

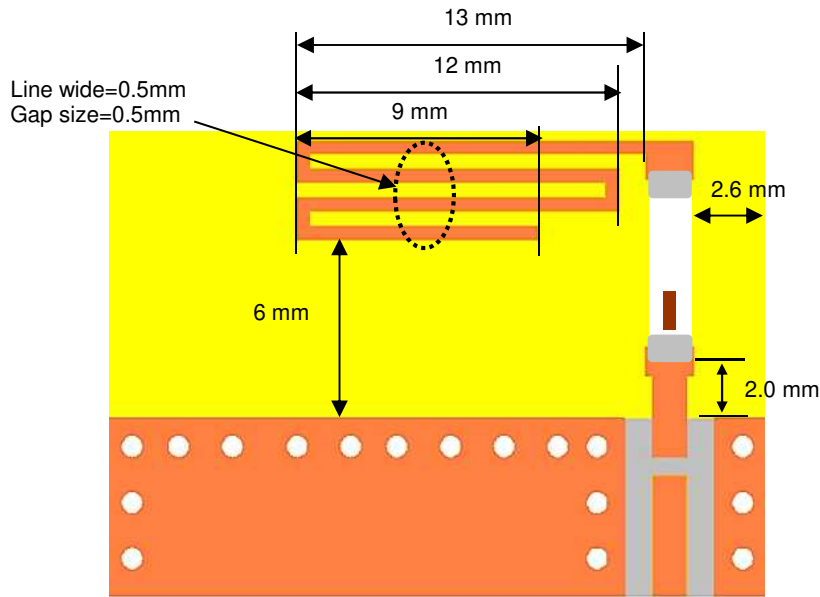

No EVB available for this layout

Total radiated efficiency will be reduced by about 10%.

Do you have more questions about this layout? Contact our apps team at:

<https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver. 2.0

<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

868 and 915MHz dual (wideband) ISM band SMD chip antenna

P/N 0900AT43A0070

Detail Specification: 1/29/2021

Page 11 of 11

Antenna tuning, optimization, and validation services:

<https://www.johansontechnology.com/ipc-antenna-services>

For more antennas and to download measured S-parameters, go to:

<https://www.johansontechnology.com/antennas>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Packaging Information

<https://www.johansontechnology.com/tape-reel-packaging>

For layout review contact our applications team at:

<https://www.johansontechnology.com/ask-a-question>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 2.0

2021 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[0900AT43A0070E](#) [0900AT43A0070001E](#)