

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001


Legacy P/N 2450AT45A100

Page 1 of 11


General Specifications	
New Global Part Number	2450AT45A0100001
Frequency Range (MHz)	2400 - 2500
Input Power	3W max. (CW)
Impedance	50 Ω
Operating Temp	-40°C to +125°C
Recommended Storage Conditions and Period for unused Product on T&R	+5 to +35°C Humidity 45 - 75% RH 18 months max.
Reel Quantity (pcs/reel)	1,000
Peak Gain Based on Orientation	
Mounting Considerations 1: "Vertical Orientation" (Page 2)	2.2 dBi typ. (XZ-V)
Mounting Considerations 2: "Horizontal Orientation Type A" (Pages 5)	1.5 dBi typ. (XZ-V)
Mounting Considerations 3: "Horizontal Orientation Type B" (Pages 8)	1.3 dBi typ. (XZ-V)

Let us help you with the antenna design, optimization, and tuning!

<https://www.johansontechnology.com/ask-a-question>



Top




Bottom

Part Number Explanation (See last page more more info on new and legacy part numbers)

P/N Suffix	Packing Style	Bulk (loose pcs.)	Suffix = B	e.g. 2450AT45A0100001B
		T & R	Suffix = E	e.g. 2450AT45A0100001E
		100% Tin	Suffix = None	e.g. 2450AT45A0100001B (B or E)
	Evaluation Boards (1-port SMA antenna test boards, pre-tuned)	2450AT45A0100001CE1 (Page 2)		
		2450AT45A0100001CE2 (Page 5)		
		2450AT45A0100001CE3 (Page 8)		

Mechanical Specifications

	In	mm
L	0.374 $\pm$ 0.008	9.50 $\pm$ 0.20
W	0.079 $\pm$ 0.008	2.00 $\pm$ 0.20
T	0.047 +.004/-.008	1.20 +0.1/-.0.2
a	0.020 $\pm$ 0.012	0.50 $\pm$ 0.30



Terminal Configuration

No	Function
1	Feeding Point
2	NC



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 2 of 11


Typical Electrical Specs for "Vertical Orientation" (T=25°C)

Frequency Range	2400 - 2500 MHz	Peak Gain	2.2 dBi typ. (XZ-V)
Return Loss	9.5 dB min.	Average Gain	1.0 dBi typ. (XZ-V)

Mounting Considerations 1: "Vertical Orientation"

Mount these devices with brown mark facing up.

*Line width should be designed to provide 50Ω impedance matching characteristics.

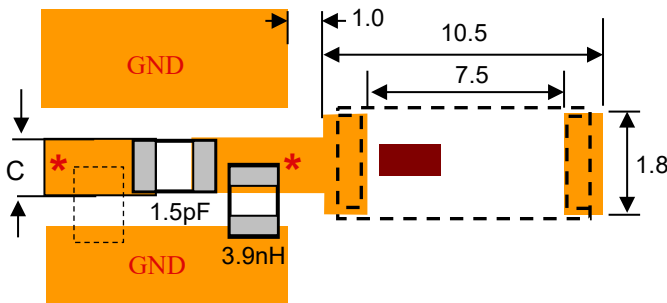


Units in mm

"C" Dimension will depend on the width of the trace required for it to have a 50ohm characteristic impedance (i.e. coplanar waveguide theory)

Want the layout file of this? Send us a message at:
<https://www.johansontechnology.com/ask-a-question>

Let us help you design this antenna to your PCB and/or optimize your layout for best radiated performance. Send us a message by clicking on the link above.

Orderable Evaluation board:
p/n: 2450AT45A0100001CE1

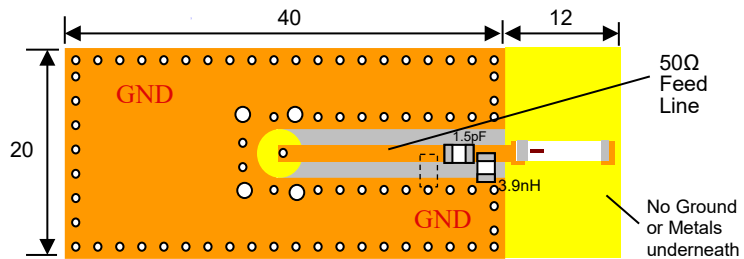

Note: It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different, go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values. If you need further help, contact our RF Applications Eng Team at: <https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
 Ver 3.2 2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001



Legacy P/N 2450AT45A100

Page 3 of 11



Typical Electrical Characteristics for "Vertical Orientation" (T=25°C)

Return Loss

a) Without a Matching Circuit

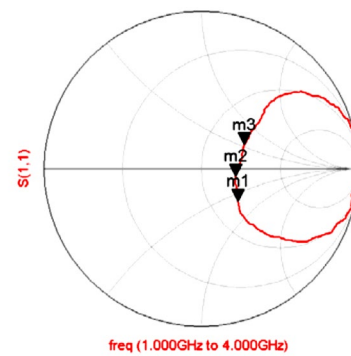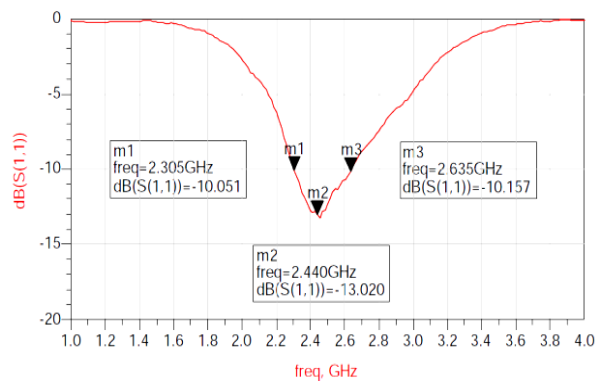

b) With a Matching Circuit

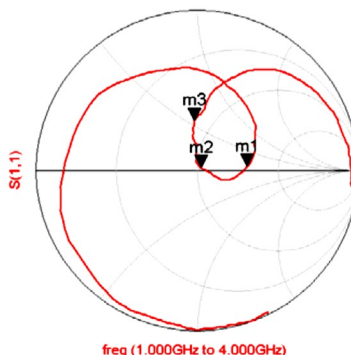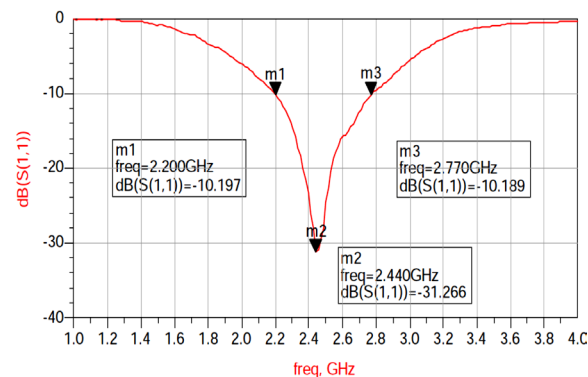

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna


Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001



Legacy P/N 2450AT45A100

Page 4 of 11



Typical Radiation Patterns for "Vertical Orientation" (T=25°C)

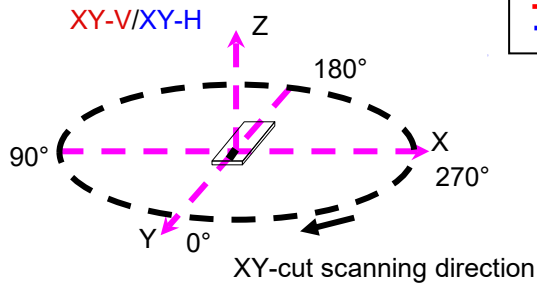


XY cut @2.45GHz
 — Vertical
 Horizontal

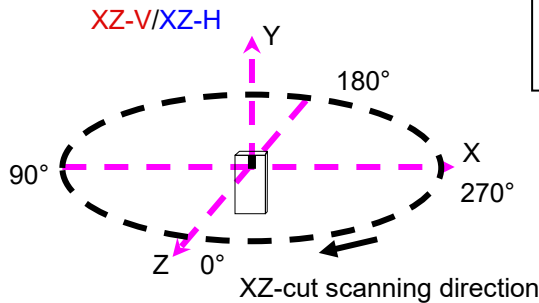

XZ cut @2.45GHz
 — Vertical
 Horizontal

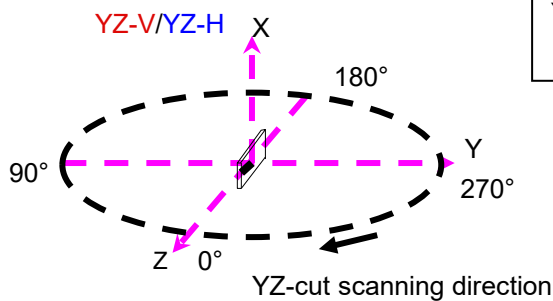

YZ cut @2.45GHz
 — Vertical
 Horizontal



Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

New Global P/N 2450AT45A0100001

Detail Specification: 8/24/2022

Legacy P/N 2450AT45A100

Page 5 of 11


Typical Electrical Specs for "Horizontal Orientation Type A" (T=25°C)

Frequency Range	2400 - 2500 MHz	Peak Gain	1.5 dBi typ. (XZ-V)
Return Loss	9.5 dB min.	Average Gain	0.0 dBi typ. (XZ-V)

Mounting Considerations 2: "Horizontal Orientation Type A"

Mount these devices with brown mark facing up.

*Line width should be designed to provide 50Ω impedance matching characteristics.

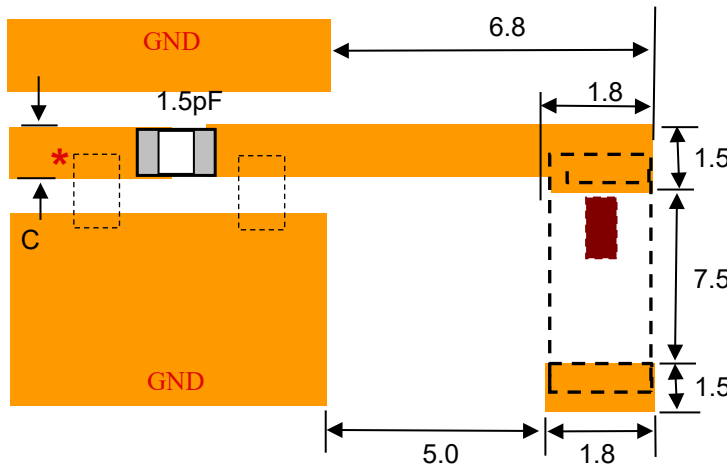

Units in mm

"C" Dimension will depend on the width of the trace required for it to have a 50ohm characteristic impedance (i.e. coplanar waveguide theory)


Want the layout file of this? Send us a message at:

<https://www.johansontechnology.com/ask-a-question>

Let us help you design this antenna to your PCB and/or optimize your layout for best radiated performance. Send us a message by clicking on the link above.

Orderable Evaluation board:

p/n: 2450AT45A0100001CE2

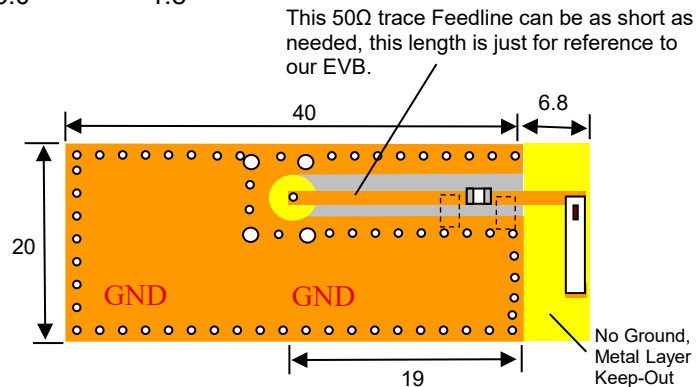

Note: It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different, go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values. If you need further help, contact our RF Applications Eng Team at: <https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022



New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 6 of 11

Typical Electrical Characteristics for "Horizontal Orientation Type A" (T=25°C)

Return Loss

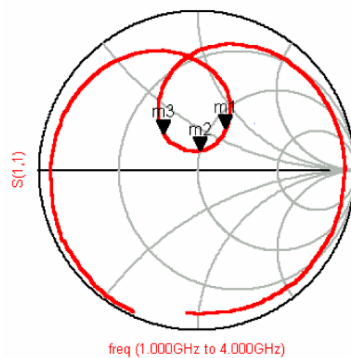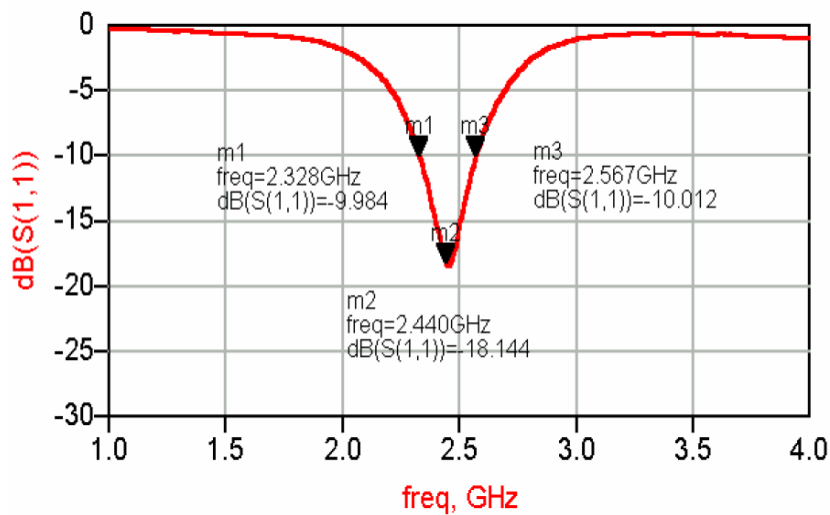

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver 3.2 2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna


Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 7 of 11

Typical Radiation Patterns for "Horizontal Orientation Type A" (T=25°C)

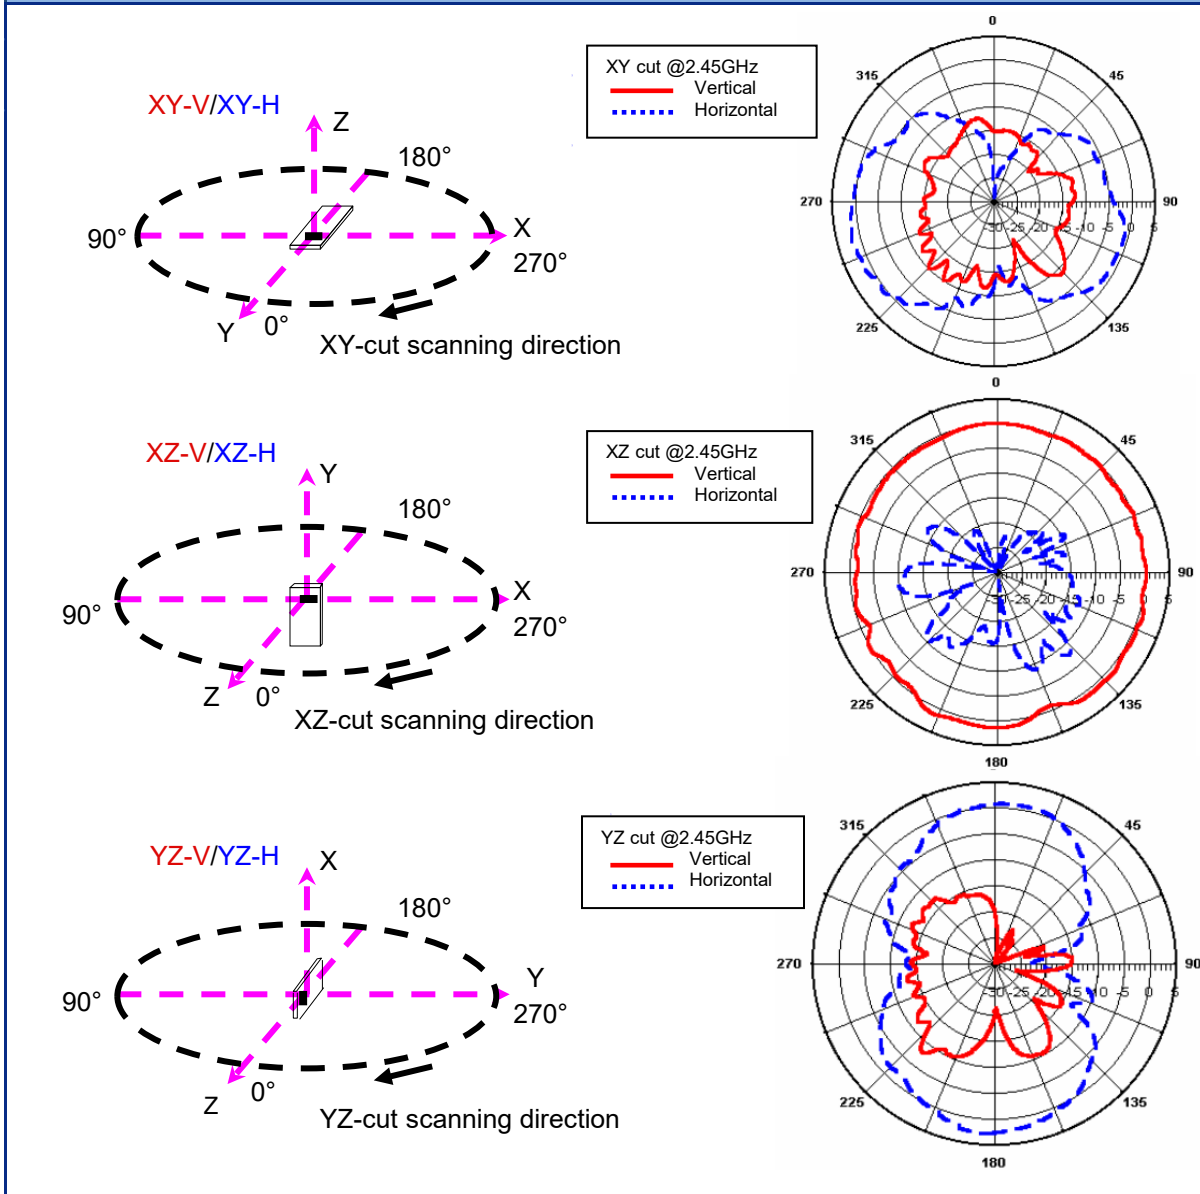

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 8 of 11


Typical Electrical Specs for "Horizontal Orientation Type B" (T=25°C)

Frequency Range	2400 - 2500 MHz	Peak Gain	1.3 dBi typ. (XZ-V)
Return Loss	9.5 dB min.	Average Gain	0.6 dBi typ. (XZ-V)

Mounting Considerations 3: "Horizontal Orientation Type B"

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50Ω impedance matching characteristics.

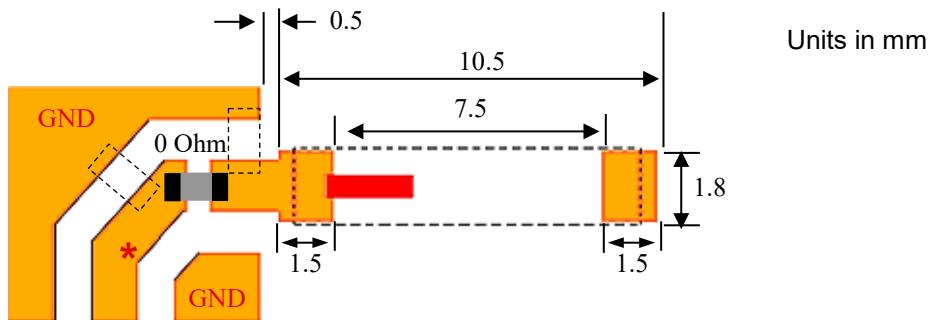


Want the layout file of this? Send us a message at:

<https://www.johansontechnology.com/ask-a-question>

Let us help you design this antenna to your PCB and/or optimize your layout for best radiated performance. Send us a message by clicking on the link above.

Orderable Evaluation board:
p/n: 2450AT45A0100001CE3

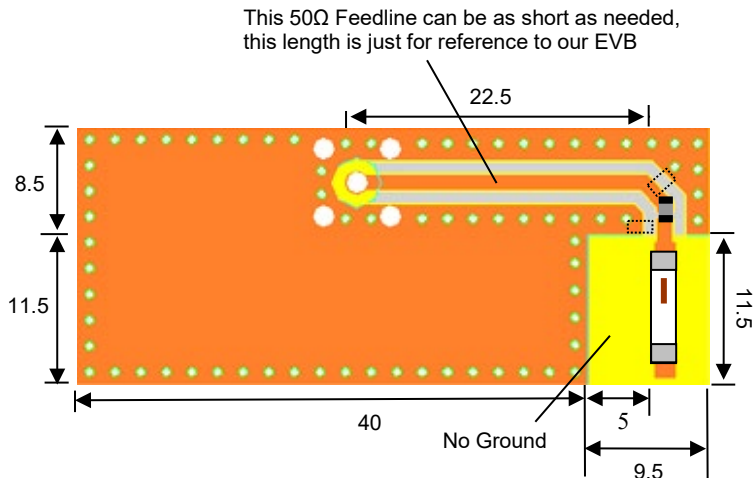

Note: It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different, go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values. If you need further help, contact our RF Applications Eng Team at: <https://www.johansontechnology.com/ask-a-question>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022



New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 9 of 11

Typical Electrical Characteristics for "Horizontal Orientation Type B" (T=25°C)

Return Loss

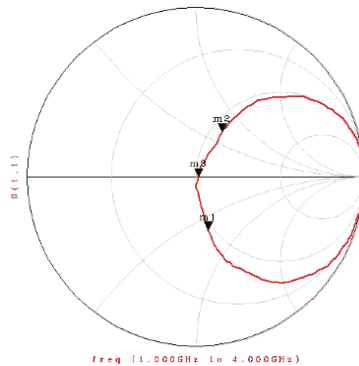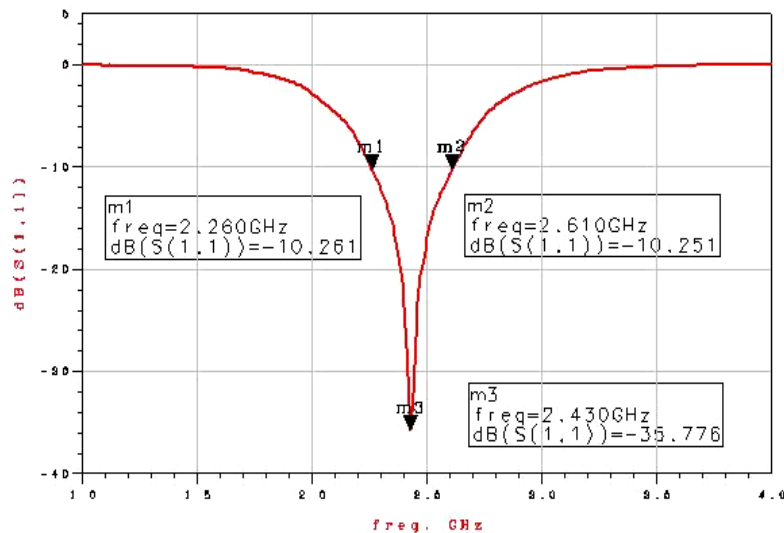

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver 3.2 2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna


Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001



Legacy P/N 2450AT45A100

Page 10 of 11



Typical Radiation Patterns for "Horizontal Orientation Type B" (T=25°C)

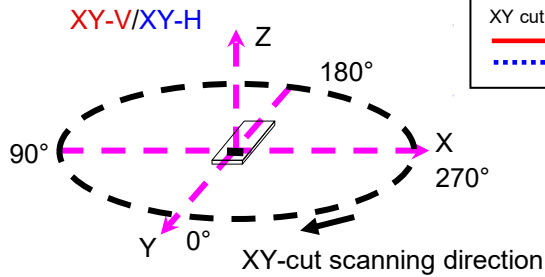


XY cut @2.45GHz
 — Vertical
 Horizontal

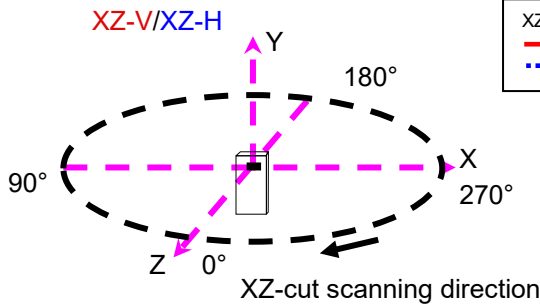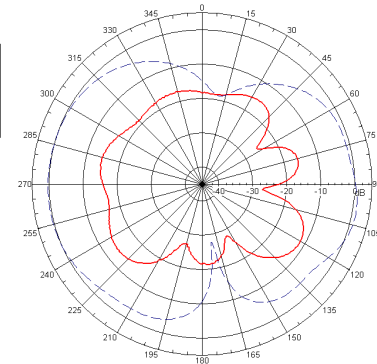

XZ cut @2.45GHz
 — Vertical
 Horizontal

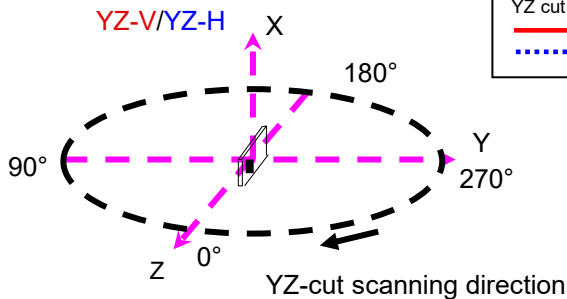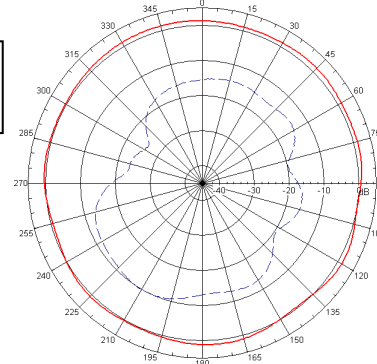

YZ cut @2.45GHz
 — Vertical
 Horizontal

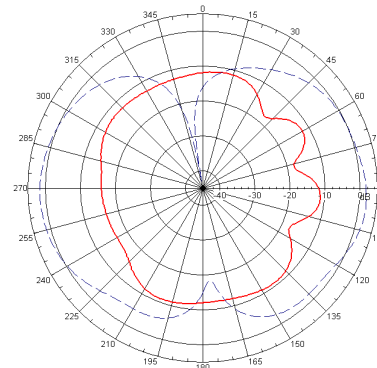

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 3.2

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz High Gain SMD Chip Antenna

Detail Specification: 8/24/2022

New Global P/N 2450AT45A0100001

Legacy P/N 2450AT45A100

Page 11 of 11

Antenna tuning, optimization, and validation services:

<https://www.johansontechnology.com/ipc-antenna-services>

For more antennas and to download measured S-parameters, go to:

<https://www.johansontechnology.com/antennas>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Packaging Information

<https://www.johansontechnology.com/tape-reel-packaging>

For layout review contact our applications team at:

<https://www.johansontechnology.com/ask-a-question>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Johanson's New Global Part Number Schema

Johanson has instituted a new Global Part Numbering (GPN) system. **Only the part number is changing.** The parts are produced with the exact same materials, manufacturing processes, manufacturing controls, dimensions, physical attributes and testing as the parts supplied with the legacy part numbers.

A database for part number crosses can be accessed at:

<https://www.johansontechnology.com/pn-search>

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver 3.2 2021 Johanson Technology, Inc. All Rights Reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[2450AT45A100E](#) [2450AT45A0100001E](#)