


TANCERAM® CHIP CAPACITORS

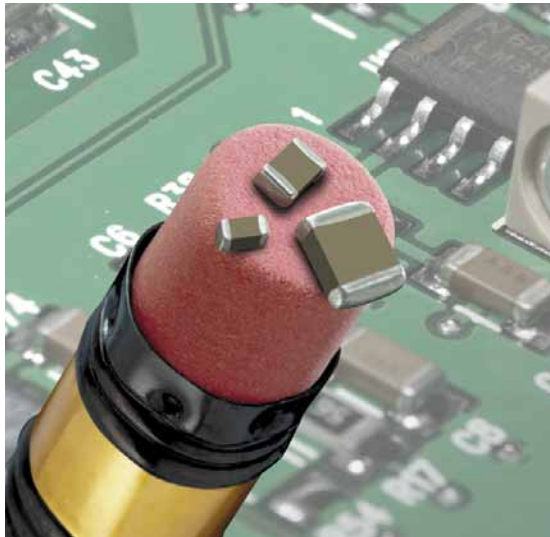

TANCERAM® chip capacitors can replace tantalum capacitors in many applications and offer several key advantages over traditional tantalums. Because Tanceram® capacitors exhibit extremely low ESR, equivalent circuit performance can often be achieved using considerably lower capacitance values. Low DC leakage reduces current drain, extending the battery life of portable products. Tancerams® high DC breakdown voltage ratings offer improved reliability and eliminate large voltage de-rating common when designing with tantalums.


ADVANTAGES

- Low ESR
- Higher Surge Voltage
- Reduced CHIP Size
- Higher Insulation Resistance
- Low DC Leakage
- Non-polarized Devices
- Improved Reliability
- Higher Ripple Current


APPLICATIONS

- Switching Power Supply Smoothing (Input/Output)
- DC/DC Converter Smoothing (Input/Output)
- Backlighting Inverters
- General Digital Circuits

Typical ESR Comparison

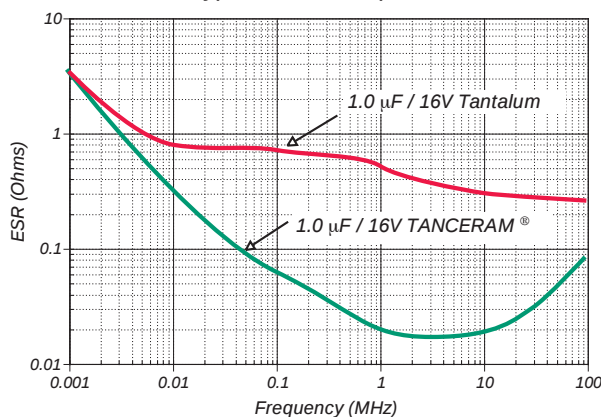

Typical Breakdown Voltage Comparison

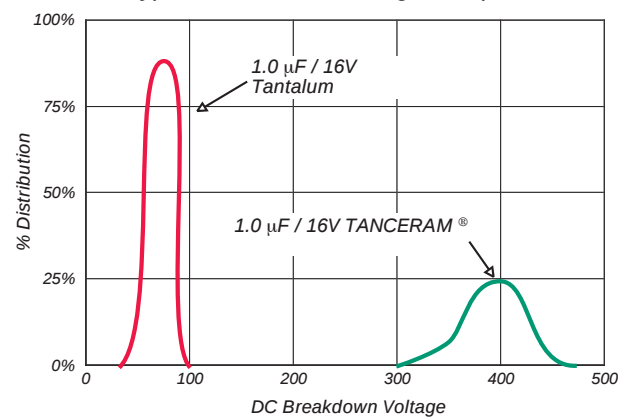

HOW TO ORDER TANCERAM®

250

VOLTAGE

500 = 50 V
250 = 25 V
160 = 16 V
100 = 10 V
6R3 = 6.3 V

R18

CASE SIZE

See Chart

Y

DIELECTRIC

W = X7R
X = X5R
Y = Y5V

105

CAPACITANCE

1st two digits are significant; third digit denotes number of zeros.

474 = 0.47 μF
105 = 1.00 μF

Z

TOLERANCE

Y5V
Z = +80% -20%
X7R/X5R
K = ±10%
M = ±20%

V

TERMINATION

V = Ni barrier w/
100% Sn Plating

MARKING

4 = Unmarked

4

E

TAPE MODIFIER

Code	Type	Reel
E	Plastic	7"
T	Paper	7"

Tape specifications
conform to EIA RS481

P/N written: 250R18Y105ZV4E

P/N written: 250R18Y105ZV4E

TANCERAM® CHIP CAPACITORS

CASE SIZE				CAPACITANCE SELECTION																					
				VDC	1.0 μ F			2.2 μ F			4.7 μ F			10 μ F			22 μ F			47 μ F			100 μ F		
0402 R07	Inches	(mm)																							
	L	.040 $\pm$.004	(1.02 $\pm$.10)																						
	W	.020 $\pm$.004	(0.51 $\pm$.10)																						
	T	.025 Max.	(0.64)																						
0603 R14	E/B	.008 $\pm$.004	(0.20 $\pm$.10)	10	*																				
				6.3	•			*		*															
	Inches	(mm)		25			*																		
	L	.063 $\pm$.008	(1.60 $\pm$.20)	16			*	*	*																
0805 R15	W	.032 $\pm$.008	(0.81 $\pm$.20)	10		•		*	•																
	T	.035 Max.	(0.89)	6.3				*										*							
	E/B	.010 $\pm$.005	(.25 $\pm$.13)																						
	Inches	(mm)		25	•		•		*																
1206 R18	L	.080 $\pm$.010	(2.03 $\pm$.25)	16	•	•			•	•	*				•	•									
	W	.050 $\pm$.010	(1.27 $\pm$.25)	10							*				•			•							
	T	.060 Max.	(1.52)	6.3							*				•			•							
	E/B	.020 $\pm$.010	(0.51 $\pm$.25)																						
1210 S41	Inches	(mm)		25	•																				
	L	.125 $\pm$.010	(3.17 $\pm$.25)	16	•																				
	W	.062 $\pm$.010	(1.57 $\pm$.25)	10																					
	T	.070 Max.	(1.78)	6.3																					
1210 S41	E/B	.020 +.015-.010	(0.51+.38-.25)	50																					
	Inches	(mm)		25		*			*		*	•													
	L	.125 $\pm$.010	(3.18 $\pm$.25)	16		*			*		*	•						•	•			•			
	W	.095 $\pm$.010	(2.41 $\pm$.25)	10						*														•	
1210 S41	T	.110 Max.	(2.8)	6.3																		•			
	E/B	.020 +.015-.010	(0.51+.38-.25)																			•			
																								•	
DIELECTRIC CODE				W	X	Y	W	X	Y	W	X	Y	W	X	Y	W	X	Y	W	X	Y	W	X	Y	

DIELECTRIC

W (X7R)

X (X5R)

Y (Y5V)

* = NEW PART

• = HIGH VOLUME

* = NEW PART

• = HIGH VOLUME

ELECTRICAL

CHARACTERISTICS

	X7R	X5R	Y5V
Temperature Coefficient:	$\pm$ 15% (-55 to +125°C)	$\pm$ 15% (-55 to +85°C)	+22%, -82% (-30 to +85°C)
Dissipation Factor:	For $\geq$ 50 VDC: 5% max. For $\leq$ 25 VDC: 10% max.	For $\geq$ 50 VDC: 5% max. For $\leq$ 25 VDC: 10% max.	For $\geq$ 10 VDC: 16% max. For 6.3 VDC: 20% max.
Insulation Resistance (Min. @ 25°C, WVDC)	100 Ω F or 10 G Ω , whichever is less		
Dielectric Strength:	2.5 X WVDC, 25°C, 50mA max.		
Test Conditions:	Capacitance values $\leq$ 22 μ F: 1.0kHz $\pm$ 50Hz @ 1.0 $\pm$ 0.2 Vrms Capacitance values $>$ 22 μ F: 120Hz $\pm$ 10Hz @ 0.5V $\pm$ 0.1 Vrms		
Other:	See page 20 for additional dielectric specifications.		



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Johanson:

<u>250R14Y104ZV4T</u>	<u>6R3R07Y105ZV4T</u>	<u>500R07W122ZV4T</u>	<u>250R14W823ZV4T</u>	<u>500R14W821ZV4T</u>
<u>250R14W183ZV4T</u>	<u>500R07W182ZV4T</u>	<u>500R14W152ZV4T</u>	<u>500R14W102ZV4T</u>	<u>250R15X475ZV4E</u>
<u>250R07W562ZV4T</u>	<u>250R14X334ZV4T</u>	<u>500R14W473ZV4T</u>	<u>500R07W681ZV4T</u>	<u>500R14W182ZV4T</u>
<u>250R14W393ZV4T</u>	<u>250R07W103ZV4T</u>	<u>250R14W223ZV4T</u>	<u>500R14W471ZV4T</u>	<u>250R14W333ZV4T</u>
<u>500R07W272ZV4T</u>	<u>100R18Y226ZV4E</u>	<u>500R14W222ZV4T</u>	<u>500R14W223ZV4T</u>	<u>250R15X225ZV4E</u>
<u>250R07W822ZV4T</u>	<u>500R07W821ZV4T</u>	<u>500R14W272ZV4T</u>	<u>250R14W683ZV4T</u>	<u>500R07W392ZV4T</u>
<u>250R14W154ZV4T</u>	<u>500R14W561ZV4T</u>	<u>500R07W332ZV4T</u>	<u>250R07W682ZV4T</u>	<u>500R14W333ZV4T</u>
<u>250R14W104ZV4T</u>	<u>500R07W152ZV4T</u>	<u>100R18Y475ZV4T</u>	<u>500R14W392ZV4T</u>	<u>500R07W103ZV4T</u>
<u>100R18Y106ZV4E</u>	<u>500R07W472ZV4T</u>	<u>500R07W391ZV4T</u>	<u>500R14W472ZV4T</u>	<u>250R15X105ZV4E</u>
<u>250R14W273ZV4T</u>	<u>500R14W122ZV4T</u>	<u>500R07W561ZV4T</u>	<u>500R14W683ZV4T</u>	<u>500R14W153ZV4T</u>
<u>500R14W273ZV4T</u>	<u>500R07W102ZV4T</u>	<u>500R14W682ZV4T</u>	<u>250R14W473ZV4T</u>	<u>500R14W332ZV4T</u>
<u>500R14W123ZV4T</u>	<u>500R07W331ZV4T</u>	<u>500R07W471ZV4T</u>	<u>250R07W472ZV4T</u>	<u>500R14W562ZV4T</u>
<u>500R14W103ZV4T</u>	<u>250R14X105ZV4T</u>	<u>500R14W393ZV4T</u>	<u>500R14W822ZV4T</u>	<u>500R14W104ZV4T</u>
<u>500R14W681ZV4T</u>	<u>500R07W222ZV4T</u>	<u>100S41Y226ZV4E</u>	<u>160R07Y104ZV4T</u>	<u>100R07Y224ZV4T</u>
<u>160R15Y105ZV4E</u>	<u>160R07W153ZV4T</u>	<u>160R07W223ZV4T</u>	<u>100R14Y105ZV4T</u>	<u>100S43Y107ZV4E</u>
<u>250S47Y476ZV4E</u>	<u>500S41Y475ZV4E</u>	<u>500R15Y105ZV4T</u>	<u>160R18Y225ZV4E</u>	<u>250R18Y105ZV4E</u>
<u>160R18Y475ZV4E</u>	<u>160R18Y225ZV4T</u>	<u>160R15Y474ZV4T</u>	<u>500S43Y106ZV4E</u>	<u>250R15Y334ZV4T</u>
<u>100R14Y225ZV4T</u>	<u>250R18Y475ZV4E</u>	<u>100R15Y475ZV4E</u>	<u>160R07Y473ZV4T</u>	<u>160R07Y104KV4T</u>
<u>500R15Y104ZV4T</u>	<u>160R15Y225ZV4T</u>	<u>500R18Y105ZV4E</u>	<u>250S43Y185ZV4E</u>	<u>160S43Y476ZV4E</u>
<u>160R14Y225ZV4T</u>	<u>250R15Y224ZV4T</u>	<u>500R15Y104MV4T</u>	<u>160R15Y105ZV4T</u>	<u>100S43Y476ZV4E</u>