
Executive Series

Intel® Desktop Board DQ77KB

Executive Series

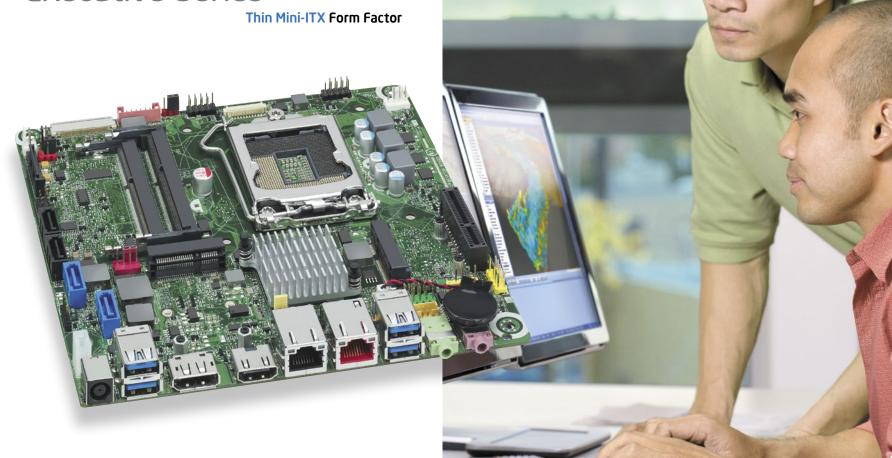

PRODUCT BRIEF

Intel® Desktop Board DQ77KB

Built for Business

Driven by today's sophisticated and competitive business environment, PC effectiveness and efficiency is key to operations success. The Intel® Desktop Board DQ77KB is designed and engineered to provide businesses a stable and reliable platform that enhances office productivity. It comes with better remote manageability and data security features. Based on the new Intel® Q77 Express Chipset with built-in Intel® Active Management Technology (Intel® AMT) 8.0, the Intel® Desktop Board DQ77KB sup-ports 2nd and 3rd Gen Intel® Core™ vPro™ processors in the latest LGA1155 package (up to 65W) bringing you unprecedented business PC performance. The 3rd Gen Intel® Core processors also feature optimized Intel® Turbo Boost Technology¹ and enhanced Intel® Hyper-Threading Technology², which provide smarter performance and a seamless visual experience. Besides essential features, extensive expandability options are available in the Intel® Desktop Board DQ77KB, including 2 high current charging USB3.0, 1 full length PCI Express Mini Card slot (supports mSATA), 1 half length PCI Express Mini Card slot (supports wireless Intel® AMT) and 1 PCI Express 3.0 x 4 connector. The Intel® Desktop Board DQ77KB supports triple independent display when using Flat Panel Display (eDP* or LVDS), Display Port* and HDMI. It also offers dual integrated 10/100/1000 Intel® GbE LAN network connection to enable link aggregation and improves Ethernet throughput. The Intel® Desktop Board DQ77KB supports Intel® Identity Protection and Intel® Anti-Theft Technology to further safeguard businesses. With its thin-mini footprint of 20mm z-height, Intel® Desktop Board DQ77KB is the perfect choice for All-In-One (AIO) usage and applications that require small form factor board.

Seamless PC Remote Manageability

Uniquely powered by Intel® vPro™ technology, the Intel® Desktop Board DQ77KB is equipped with improved KVM Remote Control manageability, enabling remote access and control of a PC, even when the PC is in OOB (Out-Of-Band) state. Desk-side troubleshooting is tremendously reduced with KVM Remote Control, saving both time and money.

Data Security Features

Protect sensitive office data with RAID built into the Intel® Q77 Express Chipset, with multiple configurations to support RAID 0, 1, 5 and 10. Encryption and signature keys are protected from software-based attacks with onboard Trusted Platform Module (TPM). Also included in the Intel® Desktop Board DQ77KB are the award-winning antivirus software McAfee* Antivirus Plus and ESET* Smart Security 5 with 60-day and 45-day license respectively.

Multiple Operating System Certifications

The Intel® Desktop Board DQ77KB is certified with Windows* 7, RedHat* and SUSE* Linux*.

Product Stability

Intel® Desktop Board DQ77KB comes under Intel® Stable Image Platform Program (SIPP) and Intel® Extended Life Program (XLP).

Executive Series

The boxed Intel® Desktop Board DQ77KB solution includes:

- ATX 2.2 full- and half-height compliant I/O shield
- SATA data cables
- SATA power cable
- Board and back panel I/O layout stickers
- Integration Guide
- TPM Quick reference guide
- Intel® Express Installer driver and software DVD




VALUE-ADDED SOFTWARE

CAPABILITY	SOFTWARE INCLUDED
Utilities	Intel® Integrator Toolkit
Productivity	Splashtop* Remote Desktop
	Laplink* PCmover* Express
	RealVNC* Viewer Plus
	Spiceworks* IT Desktop
Security	 McAfee* Antivirus Plus (60 days license)
	• ESET* Smart Security 5 (45 days license)

Intel® Desktop Board DQ77KB

Features and Benefits

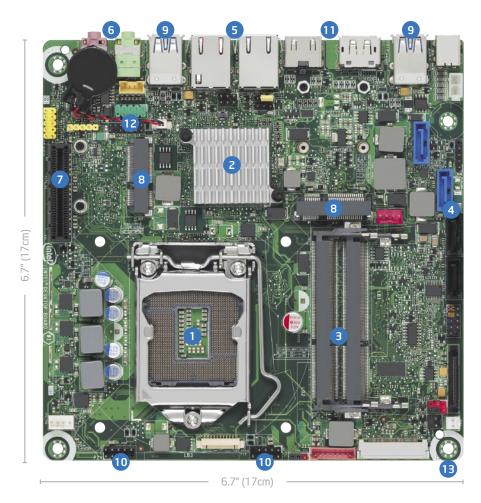



Executive Series

- Supports the 2nd and 3rd Generation Intel® CoreTM vProTM processors and other Intel® processors in the LGA1155 package, up to 65W
- 2 Intel® Q77 Express Chipset PCH
- 3 Dual-Channel DDR3 with two connectors for 1600/1333 MHz memory support: Supports 1.2V to 1.8V memory voltage control for maximum DIMM compatibility
- 4 SATA ports (2 SATA 6.0 Gb/s; 2 SATA 3.0 Gb/s): Facilitates high-speed storage and data transfers at up to 6.0 Gb/s
- 5 Dual Integrated 10/100/1000 Network Connection: Enables link aggregation and improves Ethernet throughput
- 6 Four-channel Intel® High Definition Audio®: Audio subsystem with two analog audio outputs (2 + 2 independent multi-streaming)
- 7 PCI Express* 3.0 x4 connector

- 8 1 Full Length PCI Express* Mini Card(supports mSATA) and 1 Half Length PCI Express*
 Mini Card (supports wireless Intel® AMT) slots
- 9 **4 USB 3.0 ports:** 4 back panel ports 2 ports support high current
- 10 5 USB 2.0 ports: 5 ports via internal headers
- 11 eDP*, LVDS, DisplayPort* and HDMI*: Support tripal independent display capability for multiple display support
- 12 Serial and Custom Solutions headers
- 13 Thin Mini-ITX form factor

Intel® Desktop Board DQ77KB

Technical Specifications

PROCESSOR

Processor Support

- Intel® Core™ i7 and Intel® Core™ i5 processors and other
- Intel® processors in the LGA1155 package.
- Supports Intel® 64 architecture⁴

CHIDSE.

- Intel® 077 express chipset
- Intel® Q77 Platform Controller Hub (PCH)

PERIPHERAL CONNECTIVITY

- 4 SATA ports (2 SATA 6.0 Gb/s; 2 SATA 3.0 Gb/s)
- Dual Integrated 10/100/1000 Network Connection
- 4 Super-Speed USB 3.0 ports (4 back panel ports)
- 5 Hi-Speed USB 2.0 ports (5 internal headers)

SYSTEM BIOS

- 96 Mb Flash EEPROM with Intel® Platform Innovation Framework for EFI Plug and Play
- Advanced configuration and power interface V3.0b, SMBIOS 2.5
- Intel® Express BIOS update support

SYSTEM MEMORY Memory capacity

 Two 204-pin SODIMM connectors supporting up to two double-sided SODIMMs (16 GB⁵ max)

Memory Types

- DDR3 1600⁶/ 1333 SDRAM memory support
- Non-ECC Memory

MEMORY MODES

- Dual- or single-channel operation support MEMORY VOLTAGE
- 1.2 V to 1.8 V

HARDWARE MANAGEMENT FEATURES

- Processor fan speed control
- System chassis fan speed control
- Voltage and temperature sensing
- Fan sensor inputs used to monitor fan activity
- ACPI-compliant power management control

INTEL® PRO 10/100/1000 NETWORK CONNECTION

Low-power design

EXPANSION CAPABILITIES

- One PCI Express* 3.0 x4 connector
- One Full-length PCI Express* Mini Card slot supports mSATA
- One Half-length PCI Express* Mini Card slot supports wireless Intel® AMT

HEADERS

- One serial port header
- Custom Solutions header
- Digital microphone (DMIC) header
- Stereo speaker header

AUDIO

• Four-channel Intel® High Definition Audio ³ codec

JUMPERS AND FRONT-PANEL CONNECTORS lumpers

- Single configuration jumper design
- Jumper access for BIOS maintenance mode

FRONT-PANEL CONNECTORS

- Reset, HDD LED, power LEDs, power on/off
- Front-panel Hi-Speed USB 2.0 headers
- Front-panel audio header

MECHANICAL BOARD STYLE

Thin Mini-ITX

BOARD SIZE

• 6.7" × 6.7" (17 cm × 17 cm)

BASEBOARD POWER REQUIREMENTS

Thin Mini-ITX 19 V

ENVIRONMENT OPERATING TEMPERATURE

0° C to +55° C

STORAGE TEMPERATURE

-20°C to +70°C

REGULATIONS AND SAFETY STANDARDS UNITED STATES AND CANADA

CSA / UL 60950-1, First Edition (Binational Standard)

FUROPE

(Low Voltage Directive 2006 / 95 / EC) EN 60950-1

INTERNATIONAL

IEC 60950-1

EMC REGULATIONS (tested in representative chassis) united States

FCC 47 CFR Part 15, Subpart B

Canada

Executive Series

ICES-003 Class B

Furon

(EMC Directive 2004 / 108 / EC) EN 55022 and EN 55024

Australia / New Zealand

EN 55022 Class B

lanar

VCCI V-3, V-4 Class B

South Korea

KN-22 and KN-24

Taiwan

CNS 13438 Class B

International

CISPR 22 Class B

ENVIRONMENTAL COMPLIANCE EUROPE

Europe

Europe RoHS (Directive 2002/95/EC) china China RoHS (MII Order # 39)

- Intel* Turbo Boost Technology maximum single-core turbo frequency (GHz). Intel turbo Boost Technology requires a PC with a processor with Intel Turbo boost Technology capability, Intel Turbo Boost Technology performance varies depending on hardware,software, and overall system configuration. Check with your PC manufacturer on whether your system delivers intel Turbo Boost Technology. See www.intel.com/technology/tuboboost for more information
- 2 Intel" Hyper-Threading Technology requires a computer system with a processor supporting HT Technology and an HT Technology-enabled chipset, BIOS, and operating system. Performance will vary depending on the specific hardware and software you use. See www.intel.com/info/hyperthreading for more information.
- 3 Intel* High Definition Audio requires a system with an appropriate Intel* chipset and a motherboard with an appropriate code and the necessary drivers installed. System sound quality will vary depending on actual implementation, controller, codec, drivers, and speakers. For more information about Intel* HD Audio, refer to www.intel.com/design/thipsets/Madudio.htm
- 4 64-bit computing on intel" architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel" 64 architecture. Processors will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See http://developer.intel.com/tech.pology/intel64/index.htm for more information.

- 5 System resources and hardware (such as PCI and PCI Express*) require physical memory address locations that can reduce available addressable system memory. This could result in a reduction of as much as 1 GB or more of physical addressable memory being available to the operating system and applications, depending on the system configuration and operating system.
- 6 WARNING: Altering PC memory frequency, voltage and/or latency may: (i) reduce system stability and useful life of the system, memory and processor; (ii) cause the processor and other system components to fail; (iii) cause reductions in system performance; (iv) cause additional heat or other damage; and (v) affect system data integrity. Intel has not tested, and does not warranty, the operation of the memory beyond its specifications. Intel assumes no responsibility that the memory, including if used with altered clock frequencies and/or voltages, will be fit for any particular.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS.NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIEDWARRANTY, RELATING TO SALE ANDIZE LISCLAIMS ANY EXPRESS OR LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELL FORDIZE RIGHT

Intel products are not intended for use in medical, life-saving, or life-sustaining applications.

Intel may make changes to specifications and product descriptions at any time, without notice.

All products, dates, and figures specified are preliminary based on current expectations, and are subject to change without notice. Availability in different channels may vary.

Actual Intel® Desktop Board may differ from the image shown

Intel, the Intel logo, Intel Core, Pentium, and Celeron are trademarks of Intel Corporation in the U.S. and other countries.

* Other names and brands may be claimed as the property of others.

Copyright® 2012, Intel Corporation 05/12/ST/MED/PDF 327431-001



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Intel:

BOXDQ77KB BLKDQ77KB