

# AIE500-901-FL

Fanless Edge AI System with NVIDIA® Jetson™ TX2 Series SoM, 1 HDMI, 2 GbE LAN, 2 USB, 2 COM or 2 CAN and 12 or 24 VDC

## Features

- NVIDIA® Jetson™ TX2 with Pascal™, 256 CUDA cores GPU
- High performance AI computing for GPU-accelerated processing
- Ideal for intelligent edge applications, machine learning and computer vision
- Supports M.2 PCIe & SATA SSD and MicroSD slot
- Supports 2 USB 3.1 Gen 1 and 2 COM or 2 CAN
- Wide operating temperature from -30°C to +60°C
- JetPack supported

NVIDIA® Jetson™ TX2 available through to January 2025\*  
The official end of life notice will be sent for at least 8 months before the last shipment.




## Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU Board	NVIDIA® Jetson™ TX2
CPU	HMP Dual Denver 2/2 MB L2 + Quad ARM® A57/2 MB L2
GPU	NVIDIA® Pascal™, 256 CUDA cores
System Memory	1 x 8GB 128-bit LPDDR4@1866 MHz onboard
Carried Board	SBC87901
System I/O Outlet	1 x HDMI 2.0 with 4K2K supported 2 x 10/100/1000 Mbps Ethernet (NVIDIA® + Intel® i210-IT) 2 x USB 3.1 Gen1 1 x Micro USB 2 x RS-232 default (or 2 x CAN by jumper settings) 1 x Recovery switch 1 x Reset button 1 x Power button 1 x 12 or 24 VDC power input connector 4 x SMA-type antenna connector
Watchdog Timer	Built-in TX2
Storage	Onboard 32GB eMMC (via Jetson™ TX2 8GB) 1 x M.2 Key M 2280 with PCIe x1 and SATA SSD slot 1 x Micro SD slot *The bootable device supported by eMMC only
Wireless Module	802.11ac WLAN, Bluetooth onboard (TX2 8GB only)
Expansion Interface	1 x Full-size PCI Express Mini Card slot (USB + PCI Express signal) *Either Mini PCIe connector or Micro USB (select by recovery switch) 1 x SIM slot
System Indicator	1 x Green LED for system power-on 1 x Yellow LED for M.2 storage
Power Supply	12 or 24 VDC
Operating Temperature	-30°C to +60°C (-22°F to +140°F)
Humidity	10% - 95%, non-condensing
Vibration Endurance	3 Grms with M.2 (5 to 500Hz, X, Y, Z directions)
Dimensions	171 mm (6.73") (W) x 110 mm (4.33") (D) x 57 mm (2.24") (H)
Weight (net/gross)	1.2kg (2.64lb)/1.7 kg (3.75 lb)
Certifications	CE, FCC Class A
OS Support	Linux Ubuntu 18.04

## Packing List

- 1 x Terminal block connector
- 1 x Screw pack
- 4 x Foot pad
- 2 x Antennas for WLAN (TX2 8GB only)

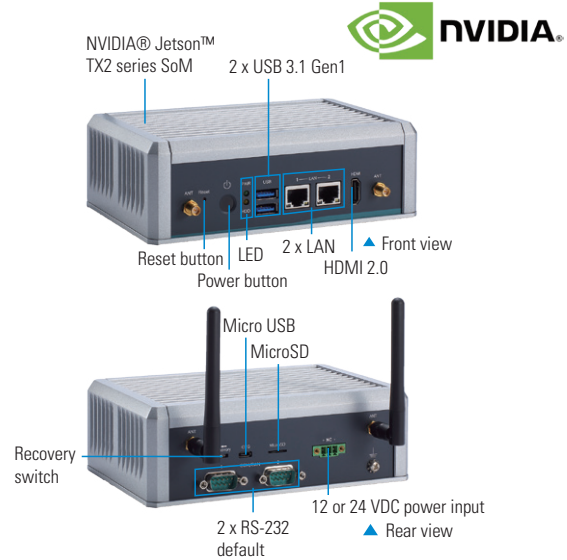

## Power Protection

### DC Version

- OVP (over voltage protection)
- OC (over current protection)

## Ordering Information

### Standard


AIE500-901-FL	Fanless edge AI system with NVIDIA® Jetson™ TX2 series SoM, 1 HDMI 2.0, 2 GbE LAN, 2 USB, 2 COM or 2 CAN and 12 or 24 VDC
---------------	---

### Optional

8817H500020E	Wall mount kit
827H5000040E	VESA arm kit
827H5000050E	DIN-rail kit
50956A24040E	12V, 36W adapter
M.2 NVMe SSD 128GB or above	
M.2 SATA SSD 128GB or above	
LTE module	
power cord	

\* Specifications and certifications may vary based on different requirements.

## Dimensions

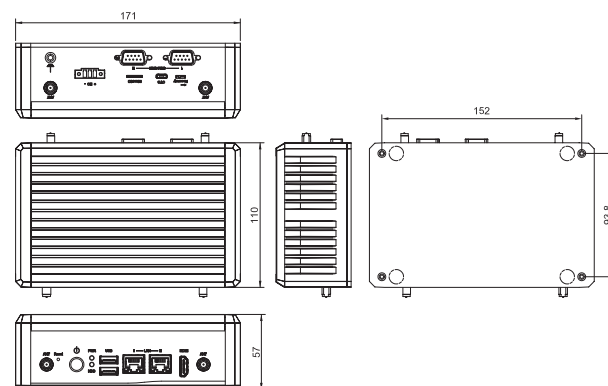

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Axiomtek:](#)

[AIE500-901-FL](#) [AIE500-901 Din Rail SFP \(E\)](#) [AIE500-901 Vesa Mount SFP \(E\)](#) [AIE500-901 Wall Mount Kit SFP](#)