# MPC175-851-FL

17" TFT Fanless Super Slim Medical Grade Panel Computer with Intel® Core™2 Duo Processor up to 2.26 GHz





- 1. Brightness adjust buttons
- 2. Volume adjust buttons
- 3. Power LED 4. MIC
- 5. Speaker (R) 6. COM 1 (RS-232/422/485)
- 7. Ethernet x 2
- 8. USB 2.0 x 2
- 9. Audio (Line-out/Mic-in)

Fanless

- 10. VGA
- 11. Power connector
- 12. Power switch
- 13. PCI or PCIe slot
- 14. Speaker (L)



## Introduction

The MPC175-851-FL is a 17-inch slim TFT fanless medical grade panel computer, which is well-suited for applications like medical image processing and medical measuring instrument. Especially designed for the medical environment, it adopts IPX1 waterproof design which protects the entire system from outside liquid, preventing system from crashing. Powered by socket P Intel® Core™2 Duo processor and PCI expansion slot, the MPC-175-851-FL is definitely the best choice for your medical panel computer.

This platform complies with UL60601-1/EN60601-1, CE, FCC Class B certifications to ensure medical operation safety. It is outfitted with 17-inch SXGA TFT LCD display. Additionally, the MPC175-851-FL offers flexible CPU selection with socket type which reduces cost, increases convenience over onboard CPU, and still maintains a fanless operation and long product life cycle. For expansion capability, the unit supports one PCI or PCIe x4 slot for video capture card, data acquisition card and more. The built-in 1.3 mega pixels camera, microphone and stereo speakers allow medical professionals to execute remote operation. Bluetooth is an available option for wireless connection with medical peripheral devices. Optional WiFi (802.11 b/g) allows wireless real-time connection of patient record for assessment. To improve patient treatment accuracy, the optional RFID (radio frequency identification) offers an efficient way to validate patient identification and give proper treatment.

## **Features**

- 17" high brightness (380 nits) SXGA TFT LCD
- Fanless socket P Intel<sup>®</sup> Core<sup>™</sup>2 Duo or Intel<sup>®</sup> Celeron<sup>®</sup> M
- UL60601-1/EN60601-1, CE & FCC class B certified
- Water/dust-proof design (front bezel: IP65, full enclosure:
- Optional Super Multi drive (for MPC175-851-FL-AC-DVDRW)
- 1 PCI or PCle x4 expansion slot (for MPC175-851-FL-AC-PCI or MPC175-851-FL-AC-PCle)
- Optional Bluetooth/RFID reader
- Built-in 1.3 mega pixels camera
- Optional internal wireless (802.11 b/g) antenna







#### **Specifications**

Multi drive

| Front Bezel | Plastic ABS         |  |  |
|-------------|---------------------|--|--|
| LCD Panel   | Display Type        | 17" SXGA TFT   |  |
|             | Brightness (cd/m²)  | 380 nits   |  |
|             | Resolution          | 1280 x 1024  |  |
|             | Viewing Angle (H/V) | 160°/160°  |  |
| Main System | CPU                 | Fanless socket P Intel® Core™2 D<br>or Intel® Celeron® M processor |  |
|             | Chipset             | Intel® GM45 + ICH9M  |  |
|             | System Memory       | 2 x DDR3 S0-DIMM memory max.<br>up to 8 GB                         |  |
|             | BIOS                | AMI BIOS with SmartView and customer CMOS backup                   |  |
|             | Storage             | 1 x 2.5" SATA HDD<br>1 x CompactFlash™                             |  |
|             | Optical Drive       | 1 x compact Super Multi drive<br>(for MPC175-851-FL-AC-DVDRW)      |  |
|             | Watchdog Timer      | 255 levels, 0~255 sec.   |  |
|             | Onboard Graphics    | Intel® GM45  |  |

<sup>\*</sup> All specifications and photos are subject to change without notice.

### **Specifications**

| I/O Connector       | 1 x RS-232/422/485 (COM 1)                            |  |  |  |
|---------------------|---|--|--|--|
|                     | 2 x USB 2.0   |  |  |  |
|                     | 1 x Audio (Mic-in/Line-out)                           |  |  |  |
|                     | 2 x 10/100/1000Mbps Ethernet                          |  |  |  |
|                     | 1 x VGA   |  |  |  |
| Expansion Interface | 1 x PCI or PCIe x4 slot                               |  |  |  |
|                     | (for MPC175-851-FL-AC-PCI or MPC175-851-FL-AC-PCIe)   |  |  |  |
| Camera              | 1 x 1.3 mega pixels camera                            |  |  |  |
| Touchscreen         | Resistive type  |  |  |  |
|                     | Light transmission: 80%                               |  |  |  |
|                     | Touch life 35 million touches                         |  |  |  |
| Power Supply        | External 24VDC with AC/DC medical grade power adapter |  |  |  |
| Dimensions          | 438 mm (17.24") (W) x 76.5 mm (3.01") (D)             |  |  |  |
|                     | x 376.4 mm (14.81") (H)                               |  |  |  |
| Packing Dimensions  | 610 mm (24.02") (W) x 260 mm (10.24") (D)             |  |  |  |
| -                   | x 590 mm (23.23") (H)                                 |  |  |  |
| Weight (net/gross)  | 7.65 kg (16.85 lb)/9 kg (19.84 lb)                    |  |  |  |
| Environment         | Operating temperature: 0° ~ +40°C (+32°F ~ +104°F)    |  |  |  |
|                     | Storage Temperature: -20°C ~ +60°C (-4°F ~ +140°F)    |  |  |  |
|                     | Relative humidity: 10% ~ 95%, non-condensing          |  |  |  |
| Certification       | CE, FCC class B, EN60601-1, UL60601-1                 |  |  |  |
|                     |   |  |  |  |

## **Ordering Information**

| MPC175-851-FL-AC-DVD<br>RW | 17" TFT fanless medical grade panel computer with resistive T/S and slim Super Multi drive              |
|----------------------------|---|
| MPC175-851-FL-AC-PCI       | 17" TFT fanless medical grade panel computer with resistive T/S and PCI expansion (w/o Super Multi)     |
| MPC175-851-FL-AC-PCle      | 17" TFT fanless medical grade panel computer with resistive T/S and PCle x4 expansion (w/o Super Multi) |

<sup>\*</sup> Specification and certifications are based on options and may vary. 
\*\*Super Multi drive includes DVD-R, DVD-RW and DVD-RAM.

## **Optional Accessories**

| E202003330 | VM-101 VESA ARM (clamp type)      |
|------------|-----------------------------------|
| E202003329 | VM-105 VESA ARM (wall mount type) |
| E228170100 | 17" stand kit                     |

### **Optional OS Installation**

| Windows® XP      |  |  |  |
|------------------|--|--|--|
| Windows® 7       |  |  |  |
| Linux kernel 2.6 |  |  |  |

Industrial Panel Computers & Monitors

Overview

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers


Accessories





▲ Stand kit

#### **Dimensions**

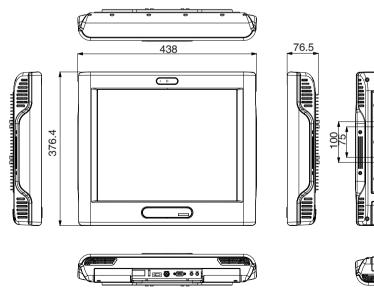

OPEN I/O COVER VIEW

<sup>\*</sup> All specifications and photos are subject to change without notice. © 2014 Axiomtek Co., Ltd. All rights reserved.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Axiomtek:

MPC175-851/COMBO MPC175-851/PCI MPC175-851/PCIe