


## Platinum Resistance Temperature Detector

## SMD 0805 (V)

The PRTD SMD 0805 is designed for automatic mounting in large volume applications on printed circuit boards where long time stability, interchangeability combined with low costs are important.

Nominal Resistance R0	Tolerance DIN EN 60751 1996-07	Tolerance DIN EN 60751 2009-05	Order Number
100 Ohm at 0°C	Class B	F 0.3	32 207 605
	Class 2B	F 0.6	32 207 604
1000 Ohm at 0°C	Class B	F 0.3	32 207 615
	Class 2B	F 0.6	32 207 614

<b>Specification</b>	DIN EN 60751	
<b>Tolerance</b>	Class B (R <sub>0</sub> : ±0.12 %) Class 2B (R <sub>0</sub> : ±0.24 %)	
<b>Temperature range</b>	-50°C to +130°C (Possible working temperatures using volume expansion aligned conductor board material: 150°C) Tolerance Class B or 2B: -50°C up to +130°C	
<b>Temperature coefficient</b>	TCR = 3850 ppm/K	
<b>Soldering connection</b>	End-termination galvanic tin plated with Ni-barrier layer	
<b>Long term stability</b>	max. R <sub>0</sub> -drift 0.06 % after 1000h at 130°C	
<b>Environmental conditions</b>	unhoused for dry environments only	
<b>Insulation resistance</b>	> 100 MΩ at 20°C; > 2 MΩ at 130°C (glass covering)	
<b>Measuring current</b>	100Ω: 0.3 to 1.0mA 1000Ω: 0.1 to 0.3mA (self heating has to be considered)	
<b>Self heating</b>	0.8 K/mW at 0°C	
<b>Reaction time</b>	Flowing water (v= 0.4m/s):	t <sub>0.5</sub> = 0.10s t <sub>0.9</sub> = 0.25s
	Air flow (v= 2m/s):	t <sub>0.5</sub> = 2.5s t <sub>0.9</sub> = 8s
<b>Processing instructions</b>	face up-mounting: reflow soldering or wave soldering, e. g. double wave ≤ 8s / 235°C	
<b>Storage life</b>	Min. 9 months (in dry environment)	
<b>Packaging</b>	„Face-up“ in blister reel, 4000 pcs / reel	
<b>Note</b>	Other tolerances and values of resistance are available on request.	

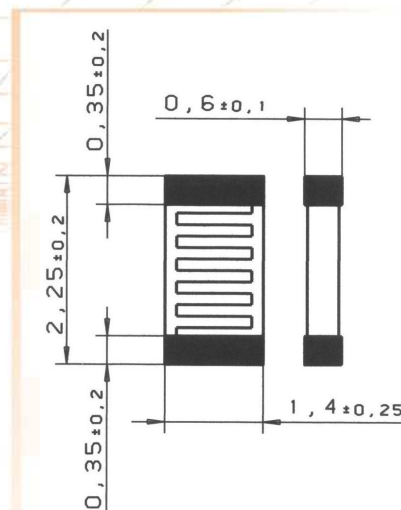

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

### Heraeus Sensor Technology USA

1901 Route 130  
North Brunswick, NJ 08902  
Phone 732-940-4400 Fax 732-940-4445  
Email [info.hst-us@heraeus.com](mailto:info.hst-us@heraeus.com)  
<http://heraeus-sensor-technology-us.com>

Name of document: 30910037 Index C  
Status: 03/2013

### Solderability test of SMD type sensor elements

#### Assembly conditions

Layout of PCB: Benchmarker II 150µm (material FR4 35µm Cu, size 190.5 x 127 x 1.5mm)  
 Tested PCB surfaces: chem. Ag, Cu OSP, NiAu, chem. Sn  
 Solder Paste: F640 SA30C5-89 M30 (material SnAgCu 96.5/3.0/0.5)


#### Tested elements

Pt 1000 SMD- V 0603  
 Pt 1000 SMD- V 0805  
 Pt 1000 SMD- V 1206

#### Solder conditions

Profiles: High and Low  
 Atmosphere: Nitrogen and Air

Profiles High and Low

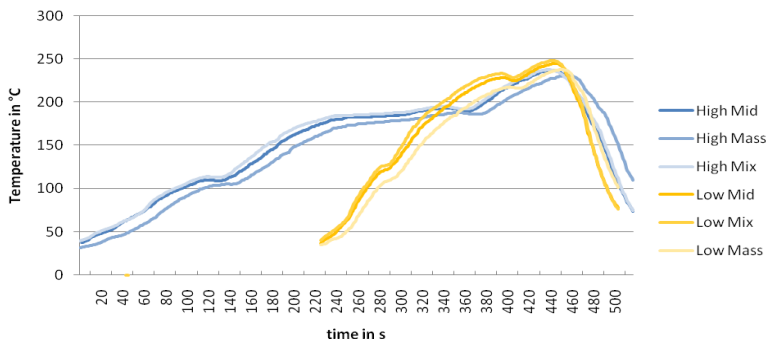

	Peak (max. temperature)		time above 217 °C in s	
	High	Low	High	Low
Mid <sup>1</sup>	237 °C	245 °C	60	92
Mass <sup>2</sup>	231 °C	238 °C	49	68
Mix <sup>3</sup>	238 °C	248 °C	65	103

- <sup>1</sup> Mid: Position of temperature sensor in the middle of the PCB
- <sup>2</sup> Mass: Position of temperature sensor at a big mass area on the PCB
- <sup>3</sup> Mix: Position of temperature sensors on right and left side on the PCB

Profile High: complete processing time 520 s  
 Profile Low : complete processing time 280 s

#### Result

All tested samples showed a sufficient wetting under the described profiles High and Low, based on a visual soldering point inspection.

All given data should not be construed as guaranteeing specific properties of the product or its suitability for a specific particular application. The data are an extract from a test report with status from July 2010.

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

### Heraeus Sensor Technology USA

1901 Route 130  
 North Brunswick, NJ 08902  
 Phone 732-940-4400 Fax 732-940-4445  
 Email info.hst-us@heraeus.com  
<http://heraeus-sensor-technology-us.com>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heraeus:](#)

[32207604](#) [32207614](#) [32207605](#) [32207615](#)