




SNDPG-series

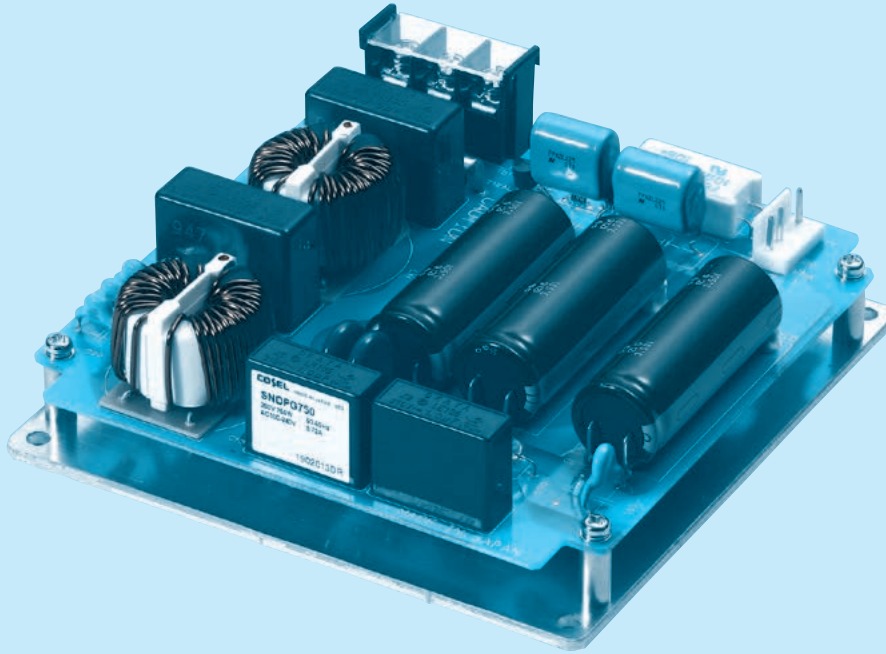

■ Power factor correction module

Compact AC - DC converter, SNDPG series includes DPG series
Conduction cooling (e.g. heat radiation from the aluminum
base plate to the attached heat sink)
AC-DC Converter can be constituted in combination with
SNDHS series and SNDBS series

■ Features

High efficiency 93% (AC100V), 96% (AC200V)
Harmonic attenuator (Complies with IEC61000-3-2)
Universal input voltage (AC85 - 264V)
Built-in inrush current protection
Enable signal (ENA)

■ Safety agency approvals

UL60950-1, C-UL and EN62368-1
Complies with DEN-AN

■ 3-year warranty

■ CE marking

Low Voltage Directive
RoHS Directive


■ UKCA marking

Electrical Equipment Safety Regulations
RoHS Regulations

SNDPG750

SNDPG 750 - ☐

① ② ③

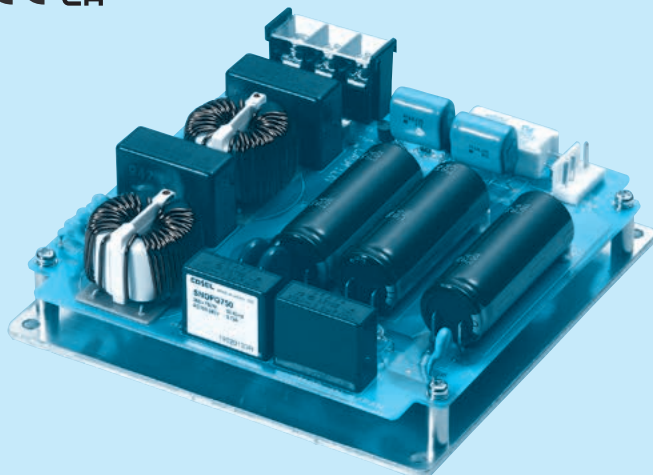

- ① Series name
② Output power
750 : 750W (ACIN 200V)
③ Optional
C : with Coating
R : with Remote ON/OFF
(Enable signal)

Please refer to Instruction manual 7.

* Please note that the unit's internal components is damaged if the output is short-circuit.

MODEL	SNDPG750	
AC INPUT[V]	AC85 - 264	AC170 - 264
MAX OUTPUT WATTAGE[W]	*1 500	750
DC OUTPUT VOLTAGE[V]	*2 360	

SPECIFICATIONS

	MODEL	SNDPG750	
INPUT	VOLTAGE[V]	AC85 - 264 1 ϕ	AC170 - 264 1 ϕ
	POWER FACTOR CORRECTION RANGE[V]	AC85 - 264 1 ϕ	
	CURRENT[A]	5.72typ (ACIN 100V)	4.24typ (ACIN 200V)
	FREQUENCY[Hz]	50/60 (47 - 63)	
	INRUSH CURRENT[A]	20/20 typ (Io=100%) (Primary inrush current / Secondary inrush current) (More than 10 sec. to re-start)	
	*3 AC200V	40/20 typ (Io=100%) (Primary inrush current / Secondary inrush current) (More than 10 sec. to re-start)	
	EFFICIENCY[%]	93typ (ACIN 100V)	96typ (ACIN 200V)
	POWER FACTOR	0.96typ (ACIN 100V)	0.93typ (ACIN 200V)
OUTPUT	LEAKAGE CURRENT[mA]	0.75 max (60Hz, According to IEC62368-1 and DEN-AN)	
	WATTAGE[W]	500	750
	VOLTAGE[V]	*2 360	
	VOLTAGE ACCURACY	*4 $\pm 2\%$	
PROTECTION CIRCUIT AND OTHERS	OVERVOLTAGE PROTECTION[V]	DC400 - 450V The power factor corrector function stops	
	ENA	*5 Enable signal, Open-correcter output	
	OTHERS	*6 Parallel operation impossible , Thermal protection	
ISOLATION	INPUT-OUTPUT, RC	*9 Non isolated	
	INPUT, OUTPUT, RC-FG	*9 AC2,800V 1minute Cutoff current = 10mA, DC500V, 50M Ω min (20 $\pm 15^{\circ}\text{C}$)	
	OUTPUT-RC	*9 AC100V 1minute Cutoff current = 25mA, DC100V, 10M Ω min (20 $\pm 15^{\circ}\text{C}$)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	*8 -20 to +95 $^{\circ}\text{C}$ (Aluminum base plate of the power module), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE) 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +95 $^{\circ}\text{C}$, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each along X, Y and Z axis	
SAFETY	SAFETY AGENCY APPROVALS	UL60950-1, C-UL, EN62368-1, Complies with DEN-AN	
	CONDUCTED NOISE	Complies with FCC-A, VCCI-A, CISPR22-A, EN55011-A, EN55022-A	
	HARMONIC ATTENUATOR	*7 Complies with IEC61000-3-2	
OTHERS	CASE SIZE/WEIGHT	125 X 44.5 X 127mm [4.92 X 1.75 X 5.0inches] (W X H X D) / 600g max	
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)	

*1 Refer to the instruction manual 2.

*2 When the input voltage is more than 240V, the output voltage becomes the value proportional to the input voltage.

*3 The value is primary surge. The current of input surge to a built-in noise filter (0.2ms or less) is excluded.

*4 The value included the output setting and the line regulation, the load regulation and the temperature regulation.
However, the input voltage is less than 240V.

*5 Refer to the instruction manual 4.4.


*6 The thermal protection stops the power factor corrector function and the ENA signal.

*7 Please contact us about class C.

*8 Refer to the instruction manual 6.2.


*9 Applicable when remote control (optional) is added.

External view

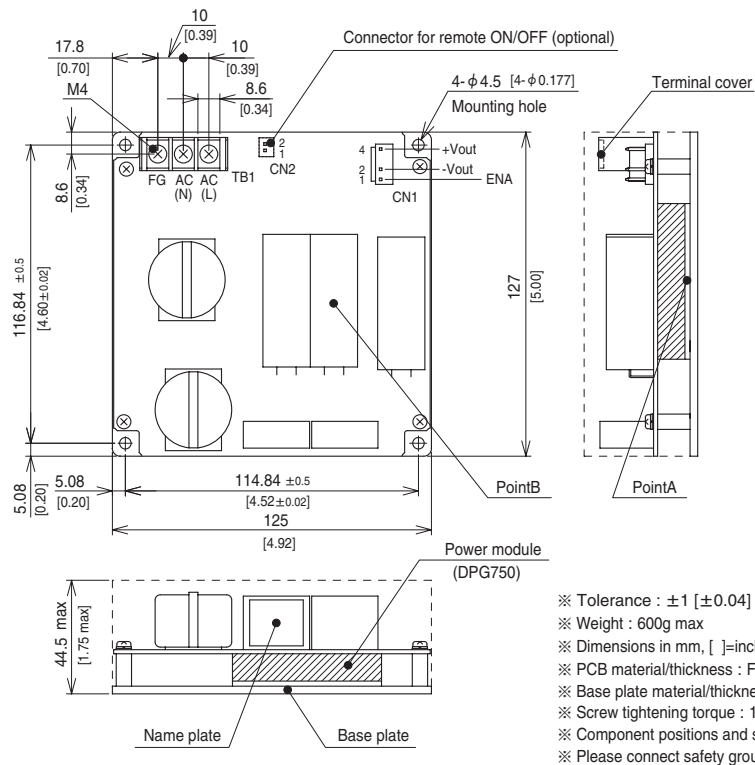


Performance data


■ STATIC CHARACTERISTICS (AC230V)

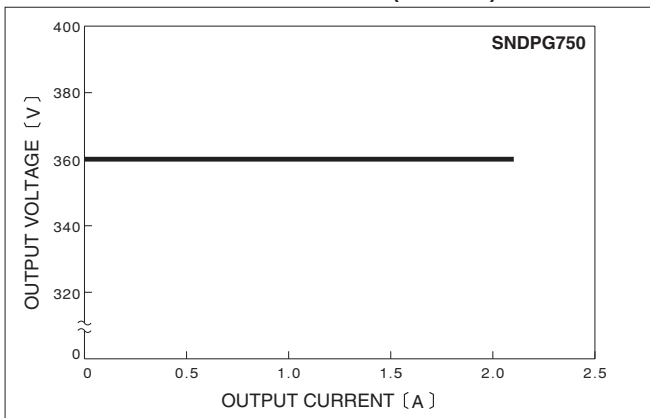


■ OUTPUT VOLTAGE FOR INPUT

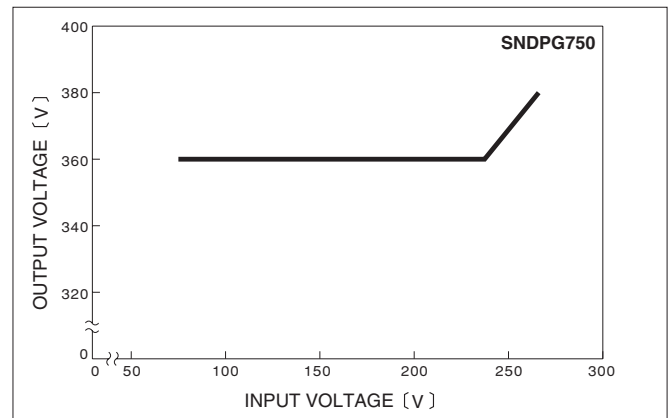

■ HARMONIC CURRENT (AC100V)

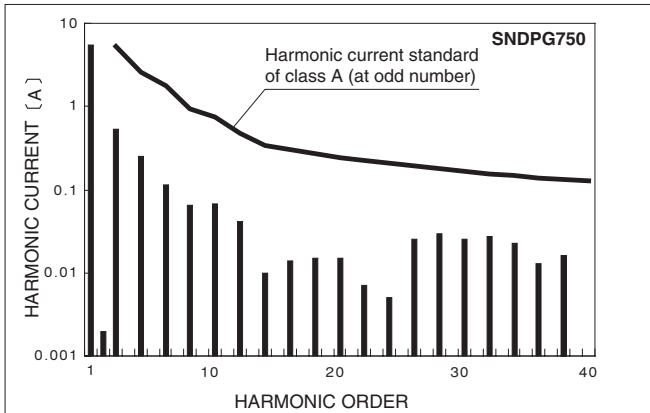

■ HARMONIC CURRENT (AC230V)

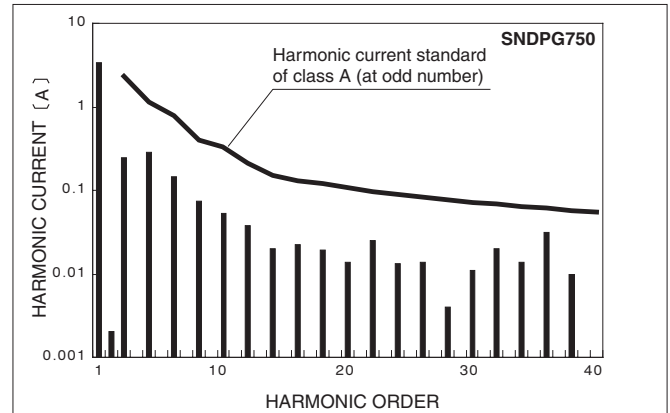

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[SNDPG750](#)