

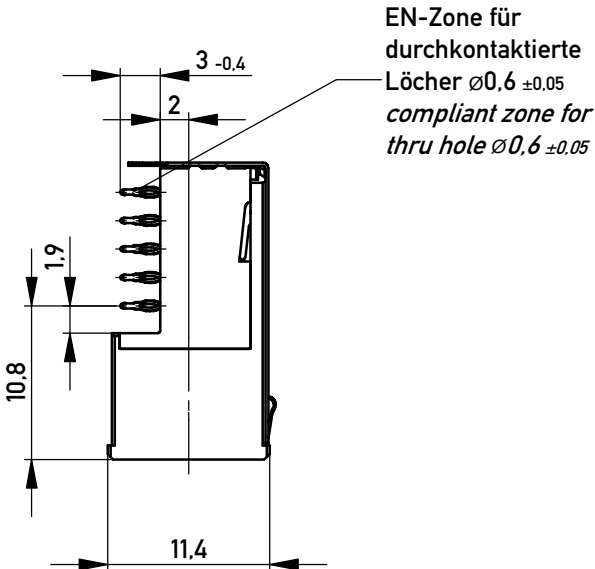
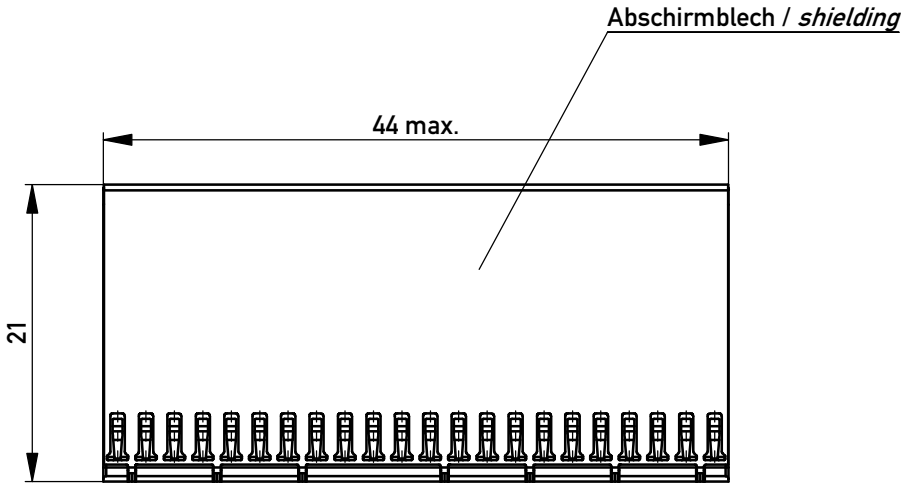


Bestückungsplan / contact layout

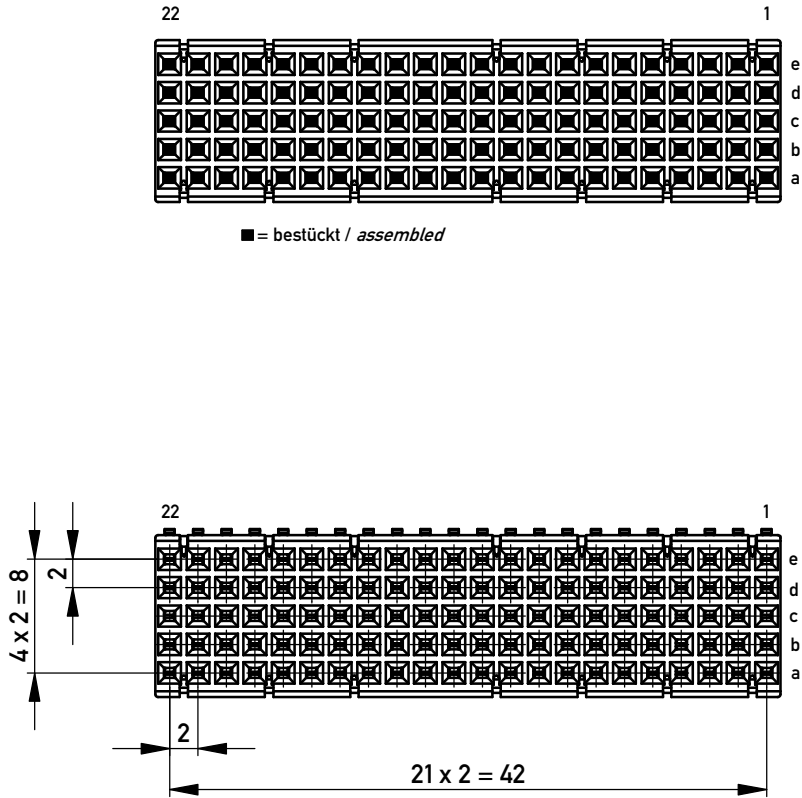

Lochbild für Leiterplatte
(Bestückungsseite)

Board hole pattern
(Component mounting side)

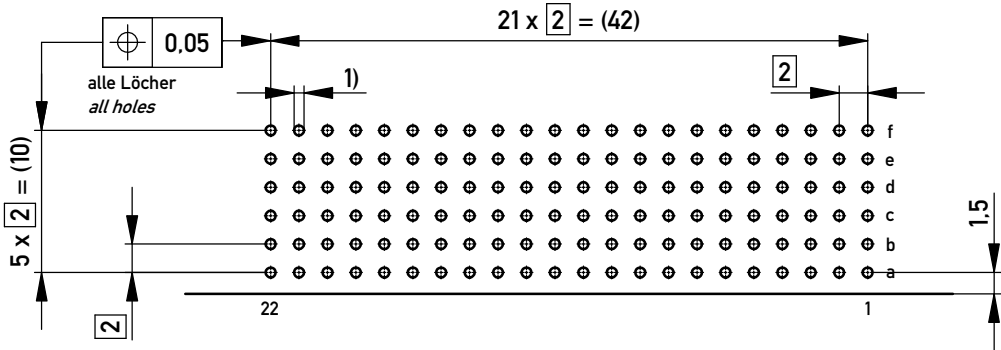

1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\varnothing 0.6 \pm 0.05$ Diameter of finished plated-through hole

$\varnothing 0.7 \pm 0.05$ Bohrungsdurchmesser des Loches
 $\varnothing 0.7 \pm 0.05$ Diameter of drilled hole


Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406
Metal plating of plated through hole
see drawing 114406

Fehlende Maße und Angaben nach IEC 61076-4-101
Missing information and dimensions per IEC 61076-4-101

Abschirmblech oben montiert
shielding mounted on top
Anforderungsstufe 2 / class 2
BA2

Extra durable Au-plating!

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16046 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		2:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation					
						ERmet Federleiste B22 <i>ERmet Female Type B22</i>					
						 www.ERNI.com					
a		25.06.2012				454364				I	
Index		Date				Class				ERMB22	
										A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[454364](#)