



Bestückungsplan – contact layout



= = bestückt - assemble

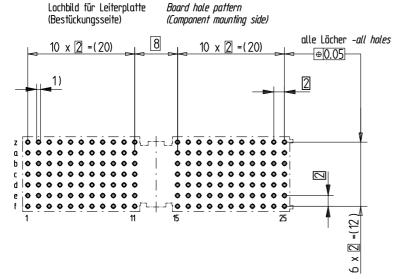

- 1) \emptyset 0,6±0.05 Durchmesser des metallisierten Loches \emptyset 0,6±0.05 Diameter of finished plated-through hole
 - ϕ 0,7 \pm 0.02 Bohrungsdurchmesser des Loches
 - Ø 0,7±0,02 Diameter of drilled hole

Schichtaufbau im metallisierten Loch siehe Zeichnung 114406

Metal plating of plated-through hole see drawing 114406

Bedruckung siehe Zeichnung 284811 Marking see drawing 284811

Fehlende Masse und Angaben nach IEC 61076-4-101 Missing information and dimensions per IEC 61076-4-101

onsider protection memo from DIN 34	Information: Distanzstück H=3.1 - distance H=3.1 Abschirmbleche Reihe z+f montiert shieldings row z+f mounted	Tolerances All Dimensions in mm	Scale 2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies	Subject to modification without prior notice. Drawing will not be updated.	ERmet-FS Federleiste A ERmet-Female Straight Type A
	before using. b 21.08.2008	■≣MI www.ERNI.com	114010
ပိ	Index Date	H:00063637.SZA	ERMA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ERNI Electronics:

114010