



Bestückungsplan / contact layout


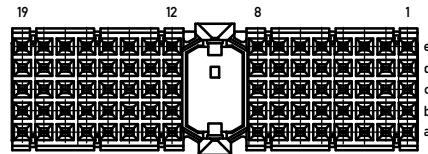


■ = bestückt / assembled

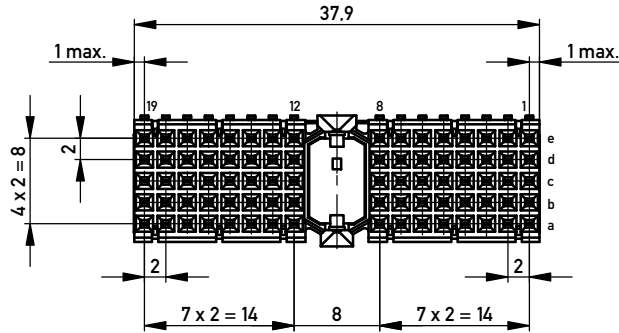


EN-Zone für durchkontaktierte Löcher $\varnothing 0.6 \pm 0.05$ /
compliant zone for thru hole $\varnothing 0.6 \pm 0.05$

Abschirmblech / shielding

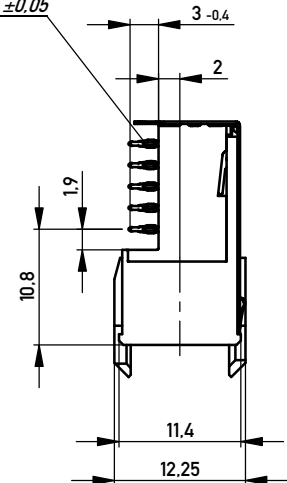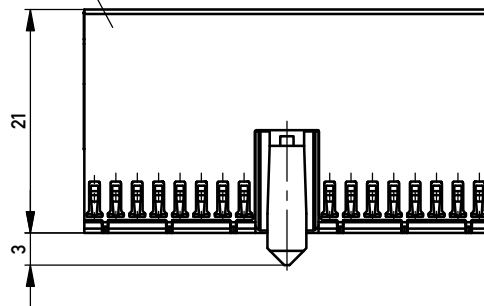

Lochbild für Leiterplatte
(Bestückungsseite)

Board hole pattern
(Component mounting side)

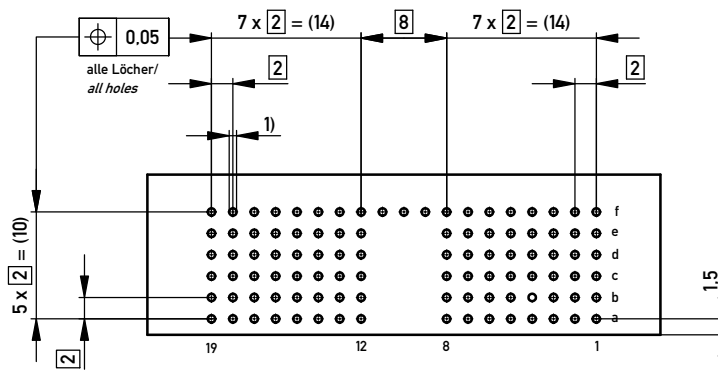

1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\varnothing 0.6 \pm 0.05$ Diameter of finished plated-through hole

$\varnothing 0.7 \pm 0.05$ Bohrungsdurchmesser des Loches
 $\varnothing 0.7 \pm 0.05$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406
Metal plating of plated through hole
see drawing 114406

Fehlende Maße und Angaben nach IEC 61076-4-101
Missing information and dimensions per IEC 61076-4-101

Information: ohne Fixierstift / without locating pegs Abschirmblech oben montiert/ shielding mounted on top		Tolerances		Scale 2:1	
		All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation ERmet Federleiste A 19 ERmet Female Type A 19	
Copyright by ERNI GmbH Proprietary notice pursuant to ISO 16016 to be observed.		Subject to modification without prior notice. Drawing will not be updated.		474278	
a	26.07.2013	ERNI www.ERNI.com		Class ERMA19	
Index	Date			I A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[474278](#)