


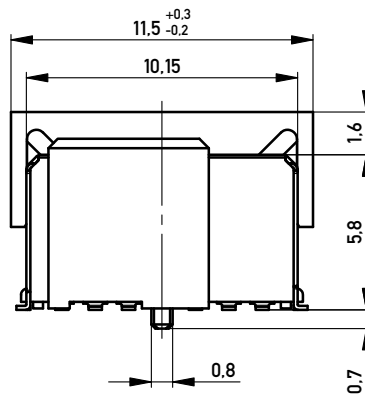
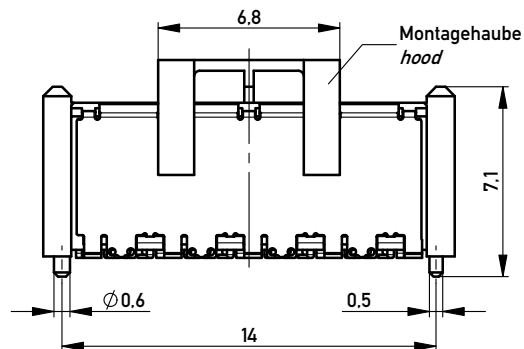
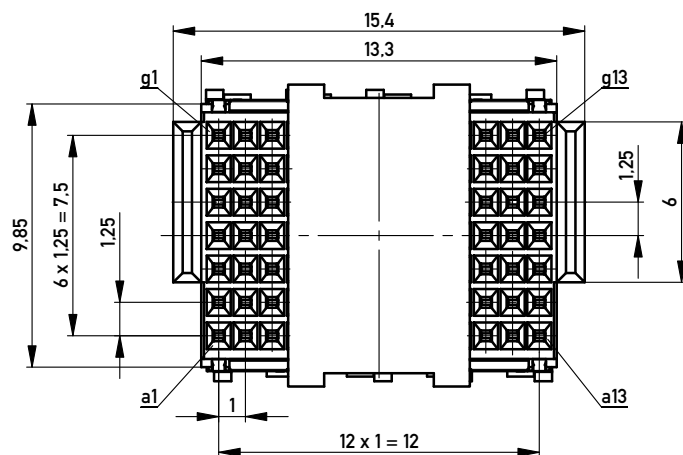




Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 310 Stück
Packaging unit: 310 pcs

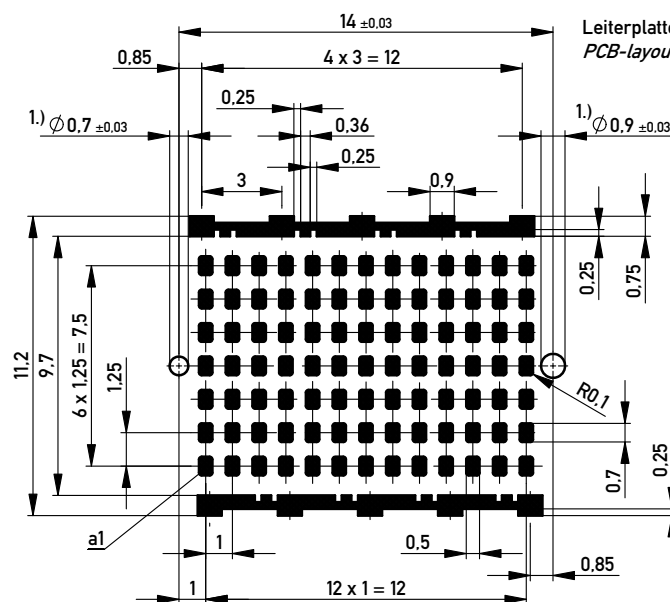

Abspulrichtung - Reel off Direction

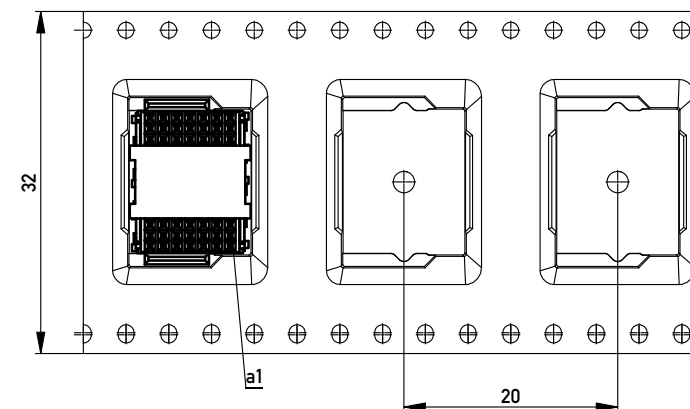

Leiterplatten-Layout Vorschlag
PCB-layout proposal

1.) Durchmesser des Bohrers
Drill tool

Für weitere Layout Details bitte
Applikationsschrift MicroSpeed beachten.
For further layout details please consider
MicroSpeed application note.

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 10165 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation Federl. SMD 6mm 91-p. BM EMV <i>Female SMD 6mm 91 pin BM EMV</i>			
				d		24.04.2014		 www.ERNI.com		464138	
Index		Date		Class		MSPEED					
								I A3			

Federl. SMD 6mm 91-p. BM EMV
Female SMD 6mm 91 pin BM EMV

464138

I
A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[464138](#)