

Actuator

45-2134.4F20.000







45-2134.4F20.000 Actuator

	_	_		-
ь.	к	()	N	

Front dimension: Ø 38 mm

Front form: round

Front bezel colour: Sand grey

Front bezel material: Metal

MOUNTING

Design: flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Red

Lens material: Plastic

Lens illumination: non illuminative

Lens shape: flush

Lens optics: opaque

MECHANICAL CHARATERISTIC

Switching action: Maintained

Switching system: Slow-make switching element


Mechanical lifetime: 10 Mio. cycles of operation

Operating frequency: Max. 1 800/h

AMBIENT CONDITION			
IP front protection:	IP66, IP67, IP69K		
Operating temperature:	– 25 °C + 70 °C		
Storage temperature:	– 40 °C + 80 °C		
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms		
Vibration resistance:	According to IEC 60068-2-6: 20 500 Hz: 5 g		
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6		
CERTIFICATE			
REACH:	REACH compliant		
RoHS:	RoHS compliant		
OTHER			
Short Description:	Actuator, \emptyset 30.5 mm, \emptyset 38 mm, flush, non illuminative, Red, Plastic, opaque, round, Sand grey, Metal, Maintained, IP66, IP67, IP69K		
Housing colour:	Silver		
Housing material:	Metal		
Hints:	Push to unlatch		
Wiring diagrams:			
	E		
Dimension drawings:			

0.073 kg

Weight:

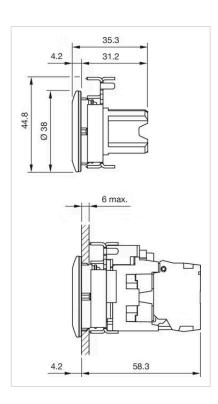

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EAO:

45-2134.4F20.000