SPECIFICATION FOR APPROVAL

A		,
		•
	RELTA	
	15-3-61	

TO: ____

PART NO.		REV.	DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER	EMI FILTER		05RPG5
ORDER P/N.	05RPG5		SAMPLE ISSUE DATE	

- 1. ELECTRICAL CHARACTERISTICS:
 - 1-1. VOLTAGE RATING 75V DC MAX.
 - 1-2. CURRENT RATING
 - A. AT 75VDC 5A Max.
 - 1-3. HIPOT RATING (FOR ONE MINUTE)
 - A. LINE TO GROUND 1500VDC B. LINE TO LINE 100VDC
 - 1-4. TEMPERATURE RANGE: -25 TO +100 DEGREE C
 - 1-5. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	0	3	4	8	30	40	40	35	20
DIF. MODE dB	10	20	25	30	35	35	35	30	30

1-6. SAFETY

REPORT BY	CHECKED BY	APPROVED BY		
			REV.	


SPECIFICATION FOR APPROVAL




TO:

	PART NO.		REV.	DELTA SAMPLE ISSUE NO	
	PART NAME	EMI FILTER		DELTA MODEL	05RPG5
ſ	ORDER P/N.	05RPG5		SAMPLE ISSUE DATE	

2. PHYSICAL DIMENSIONS:

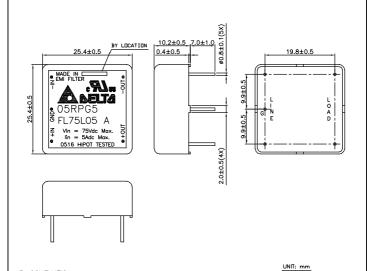

3. SCHEMATIC:



- L1: 0.20mH
- L2: 0.50mH
- Cx: 4.7uF
- Cy: 4700pF

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERW DCEIMALS .X±		SPECIFIED .XX±	DIMENSION TOLERANCE ANGLES±	
			REV.				

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114, TAIWAN, R.O.C. TEL:886-2-87972088 FAX:886-2-87972120

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics:

05RPG5