


- 10 A output current
- 3.3 V input voltage
- Wide-output voltage adjust (0.8 Vdc to 2.5 Vdc)
- Auto-track™ sequencing\*
- Margin up/down controls
- Pre-bias start-up capability
- Efficiencies up to 93%
- Output ON/OFF inhibit
- Output voltage sense
- Point-of-Load-Alliance (POLA) compatible
- Available RoHS compliant



The PTH03060 is a next generation series of non-isolated dc-dc converters offering some of the most advanced POL features available in the industry. The primary new feature provides for sequencing between multiple modules, a function, which is becoming a necessity for powering advanced silicon including DSP's, FPGA's and ASIC's requiring controlled power-up and power down. Other industry leading features include margin up/down controls, pre-bias start-up capability and efficiencies up to 93%. The PTH03060 has an input voltage of 2.95 Vdc to 3.65 Vdc and offers a wide 0.8 Vdc to 2.5 Vdc output voltage range with up to 10 A output current, which allows for maximum design flexibility and a pathway for future upgrades.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated  
C<sub>in</sub> = 330 µF, C<sub>out</sub> = 0 µF

### SPECIFICATIONS

#### OUTPUT SPECIFICATIONS

|                                    |                                                    |             |
|------------------------------------|----------------------------------------------------|-------------|
| Voltage adjustability              | (See Note 4)                                       | 0.8-2.5 Vdc |
| Setpoint accuracy                  |                                                    | ±2.0% Vo    |
| Line regulation                    |                                                    | ±10 mV typ. |
| Load regulation                    |                                                    | ±12 mV typ. |
| Total regulation                   |                                                    | ±3.0% Vo    |
| Minimum load                       |                                                    | 0 A         |
| Ripple and noise                   | 20 MHz bandwidth                                   | 20 mV pk-pk |
| Temperature co-efficient           | -40 °C to +85 °C                                   | ±0.5% Vo    |
| Transient response<br>(See Note 5) | 70 µs recovery time<br>Overshoot/undershoot 100 mV |             |
| Margin adjustment                  |                                                    | ±5.0% Vo    |

#### INPUT SPECIFICATIONS

|                      |                       |                   |
|----------------------|-----------------------|-------------------|
| Input voltage range  | (See Note 3)          | 2.95-3.65 Vdc     |
| Input current        | No load               | 10 mA typ.        |
| Remote ON/OFF        | (See Note 1)          | Positive logic    |
| Start-up time        |                       | 1 V/ms            |
| Undervoltage lockout |                       | 2.8-2.95 Vdc typ. |
| Track input voltage  | Pin 8 (See Note 6, 7) | ±0.3 Vin          |

#### EMC CHARACTERISTICS

|                         |                       |
|-------------------------|-----------------------|
| Electrostatic discharge | EN61000-4-2, IEC801-2 |
| Conducted immunity      | EN61000-4-6           |
| Radiated immunity       | EN61000-4-3           |

#### GENERAL SPECIFICATIONS

|                         |                        |                                                     |
|-------------------------|------------------------|-----------------------------------------------------|
| Efficiency              | (See Efficiency Table) | 93% max.                                            |
| Insulation voltage      |                        | Non-isolated                                        |
| Switching frequency     |                        | 300 kHz typ. ±25 kHz                                |
| Approvals and standards |                        | EN60950<br>UL/cUL60950                              |
| Material flammability   |                        | UL94V-0                                             |
| Dimensions              | (L x W x H)            | 25.27 x 15.75 x 9.00 mm<br>0.995 x 0.620 x 0.354 in |
| Weight                  |                        | 3.7 g (0.13 oz)                                     |
| MTBF                    | Telcordia SR-332       | 7,092,000 hours                                     |

#### ENVIRONMENTAL SPECIFICATIONS

|                                     |                                                 |                                       |
|-------------------------------------|-------------------------------------------------|---------------------------------------|
| Thermal performance<br>(See Note 2) | Operating ambient, temperature<br>Non-operating | -40 °C to +85 °C<br>-40 °C to +125 °C |
| MSL ('Z' suffix only)               | JEDEC J-STD-020C                                | Level 3                               |

#### PROTECTION

|               |            |           |
|---------------|------------|-----------|
| Short-circuit | Auto reset | 20 A typ. |
|---------------|------------|-----------|

#### International Safety Standard Approvals



UL/cUL CAN/CSA-C22.2 No. 60950-1-03/UL 60950-1,  
File No. E174104




TÜV Product Service (EN60950) Certificate No. B 04 06 38572 044  
CB Report and Certificate to IEC60950, Certificate No.  
US/8292/UL

\*Auto-track™ is a trade mark of  
Texas Instruments

| OUTPUT POWER (MAX.) | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT (MIN.) | OUTPUT CURRENT (MAX.) | EFFICIENCY (MAX.) | REGULATION |        | MODEL NUMBER <sup>(9,10)</sup> |
|---------------------|---------------|----------------|-----------------------|-----------------------|-------------------|------------|--------|--------------------------------|
|                     |               |                |                       |                       |                   | LINE       | LOAD   |                                |
| 25 W                | 2.95-3.65 Vdc | 0.8-2.5 Vdc    | 0 A                   | 10 A                  | 93%               | ±10 mV     | ±12 mV | PTH03060                       |


### Part Number System with Options

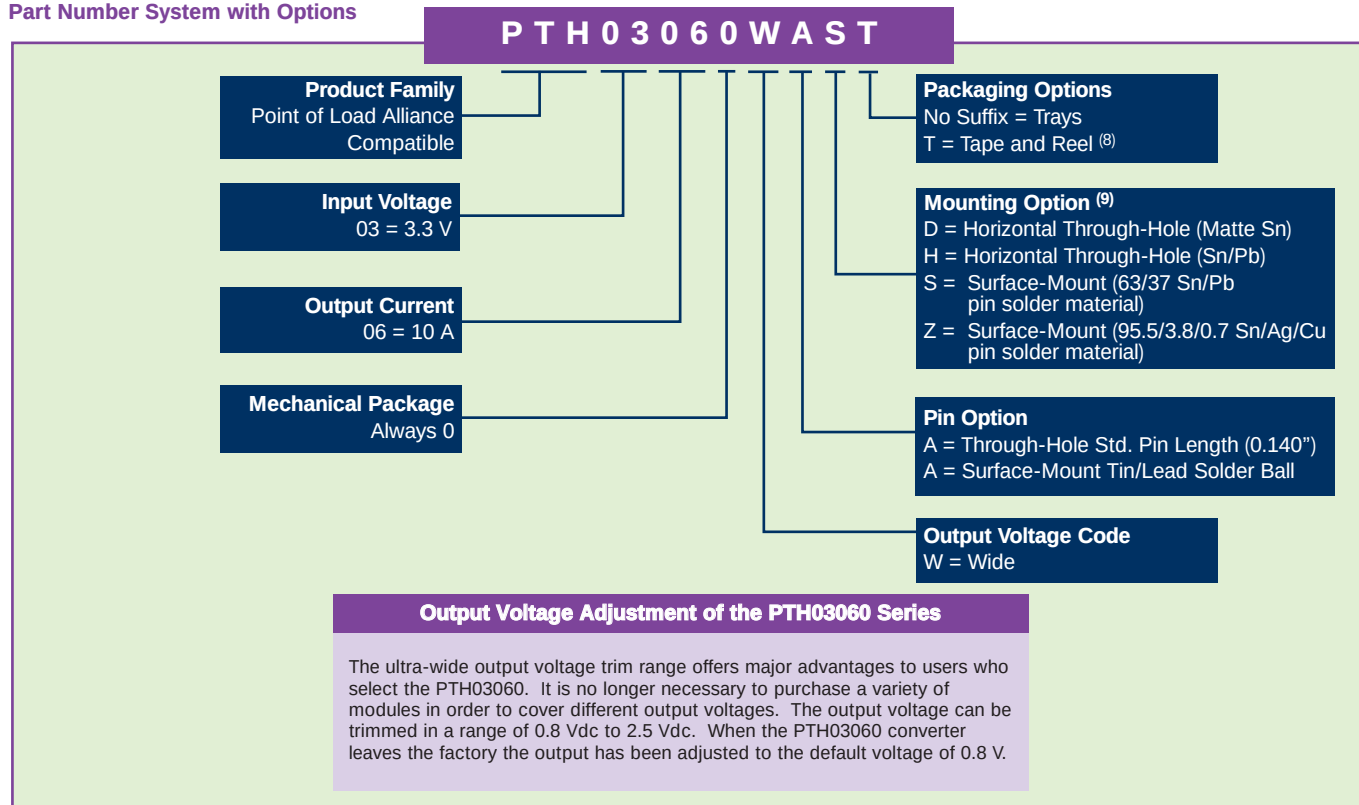


### Notes

- Remote ON/OFF. Positive Logic  
ON: Pin 3 open; or  $V > V_{in} - 0.5 V$   
OFF: Pin 3 GND; or  $V < 0.8 V$  (min - 0.2 V).
- See Figure 1 for safe operating curve.
- A 330  $\mu F$  electrolytic input capacitor is required for proper operation. The capacitor must be rated for a minimum of 700 mA rms of ripple current.
- An external output capacitor is not required for basic operation. Adding 330  $\mu F$  of distributed capacitance at the load will improve the transient response.
- 1 A/ $\mu s$  load step, 50 to 100%  $I_{o,max}$ ,  $C_{out} = 330 \mu F$ .
- If utilized  $V_{out}$  will track applied voltage by  $\pm 0.3 V$  (up to  $V_o$  set point).
- The pre-bias start-up feature is not compatible with Auto-Track™. This is because when the module is under Auto-Track™ control, it is fully active and will sink current if the output voltage is below that of a back-feeding source. Therefore to ensure a pre-bias hold-off, one of the following two techniques must be followed when input power is first applied to the module. The Auto-Track™ function must either be disabled, or the module's output held off using the Inhibit pin. Refer to Application Note 154 for more details.
- Tape and reel packaging only available on the surface-mount versions.
- To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTH03060WAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTH03060WAD.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.


| EFFICIENCY TABLE ( $I_o = 7 A$ ) |            |
|----------------------------------|------------|
| OUTPUT VOLTAGE                   | EFFICIENCY |
| $V_o = 1.0 V$                    | 85%        |
| $V_o = 1.2 V$                    | 87%        |
| $V_o = 1.5 V$                    | 89%        |
| $V_o = 1.8 V$                    | 91%        |
| $V_o = 2.0 V$                    | 92%        |
| $V_o = 2.5 V$                    | 93%        |

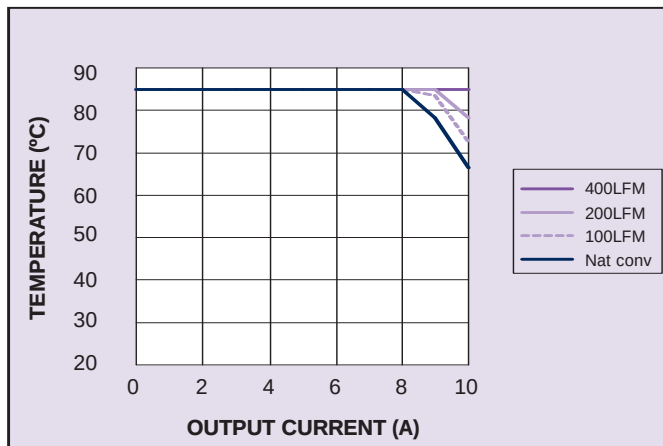

**Figure 1 - Safe Operating Area**  
Vin = 3.3 V, Output Voltage = 2.5 V (See Note A)

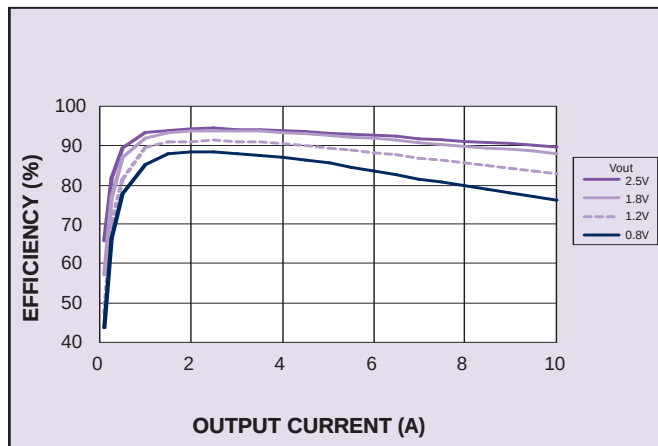

**Figure 2 - Efficiency vs Load Current**  
Vin = 3.3 V (See Note B)

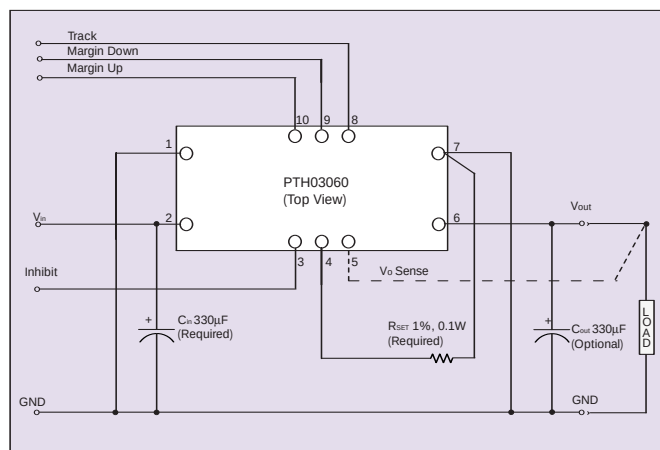

**Figure 3 - Standard Application**

### Notes

- A** SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.
- B** Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

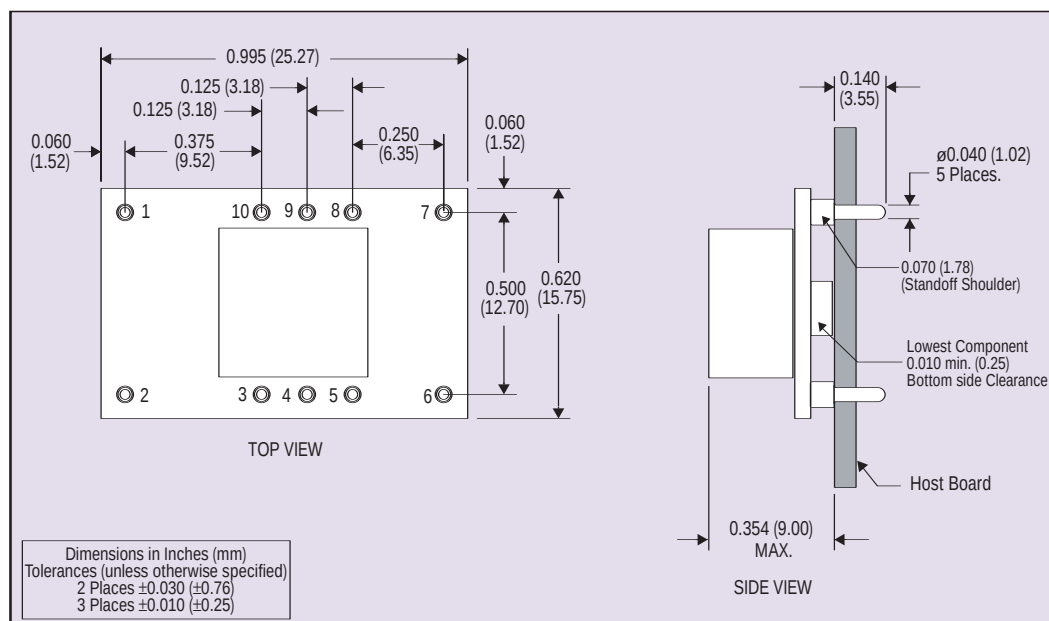


Figure 1 - Plated Through-Hole Mechanical Drawing

| PIN CONNECTIONS |              |
|-----------------|--------------|
| PIN NO.         | FUNCTION     |
| 1               | Ground       |
| 2               | Vin          |
| 3               | Inhibit*     |
| 4               | Vo adjust    |
| 5               | Vo sense     |
| 6               | Vout         |
| 7               | Ground       |
| 8               | Track        |
| 9               | Margin down* |
| 10              | Margin up*   |

\*Denotes negative logic:  
Open = Normal operation  
Ground = Function active

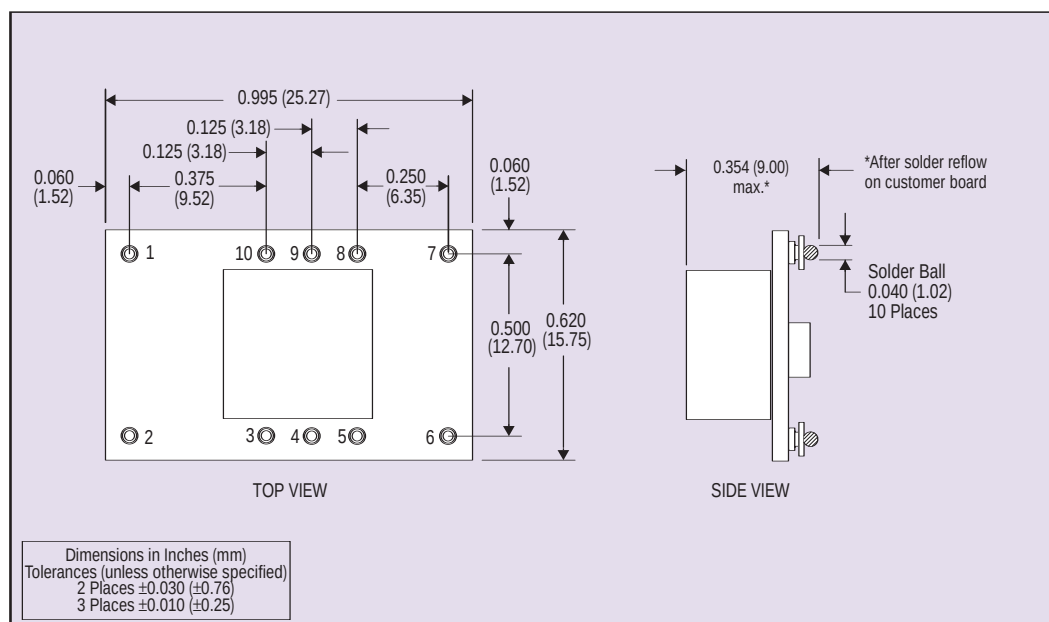


Figure 2 - Surface-Mount Mechanical Drawing

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[PTH03060WAS](#) [PTH03060WAST](#)