


ADAM-4115

ADAM-4015

Robust 6-Ch RTD Input Module

6-ch RTD Module with Modbus

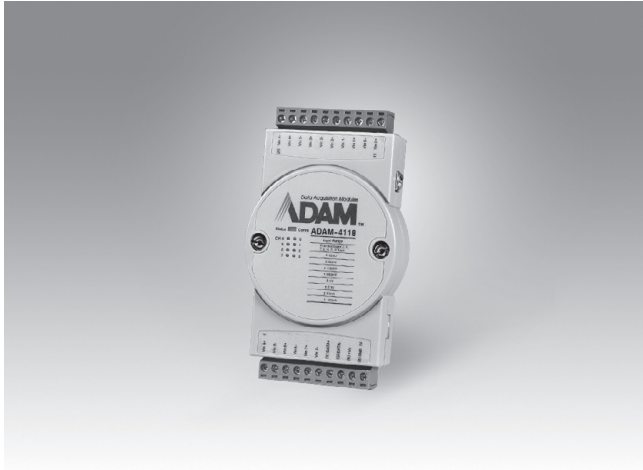

ADAM-4115



ADAM-4015



Specifications

General

- **Certification** CE, FCC, UL
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 s) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU
- **Interface** RS-485, Micro USB
- **Burnout Detection** Yes

RTD Input

- **Channels** 6 differential
 - **Input Connections** 2, 3-wire
 - **Sampling Rate** 10/100 Hz total channels (selected by utility)
 - **Input Impedance** 10 M Ω
 - **Input Type** Pt, Balco and Ni RTD
 - **RTD Types and Temperature Ranges**
 - Pt100 -50~150°C
 - 0~100°C
 - 0~200°C
 - 0~400°C
 - 200~200°C
- Supports both IEC 60751 ITS90 (0.0385 W/W/°C) and JIS C 1604 (0.0392 W/W/°C)
- Pt1000 -40~160°C
 - Balco (500) -30~120°C
 - Ni (518) -80~100°C
 - 0~100°C
- **Accuracy** $\pm 0.1\%$ (Typical)
 - **CMR @ 50/60 Hz** 120 dB
 - **Span Drift** ± 25 ppm/°C
 - **Zero Drift** ± 6 μ V/°C

Specifications

General

- **Certification** CE, FCC
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** Typical: 0.5 W @ 24 V_{DC}
Max.: 0.9 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 s) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU
- **Burnout Detection** Yes

Analog Input

- **Channels** 6 differential
 - **Input Connections** 2, 3-wire
 - **Sampling Rate** 10 Hz total channels
 - **Input Impedance** 10 M Ω
 - **Input Type** Pt, Balco, Ni and BA1 RTD
 - **RTD Types and Temperature Ranges**
 - Pt100 -50~150°C
 - 0~100°C
 - 0~200°C
 - 0~400°C
 - 200~200°C
- Supports both IEC 60751 ITS90 (0.0385 W/W/°C) and JIS C 1604 (0.0392 W/W/°C)
- Pt1000 -40~160°C
 - Balco (500) -30~120°C
 - Ni (518) -80~100°C
 - 0~100°C
 - Ni (508) 0~100°C
 - 50~200°C
 - 200~600°C
- **Accuracy** $\pm 0.1\%$ (Typical)
 - **CMR @ 50/60 Hz** 120 dB
 - **Span Drift** ± 25 ppm/°C
 - **Zero Drift** ± 6 μ V/°C

Common Specifications

General

- **Power Input** 10 ~ 30 V_{DC}
ADAM-4115: 10 ~ 48 V_{DC}

Environment

- **Operating Humidity** 5 ~ 95% RH

Operating Temperature

Storage Temperature

- 10 ~ 70°C (14 ~ 158°F)
- ADAM-4115: -40 ~ 85°C (-40 ~ 185°F)
- 25 ~ 85°C (-13 ~ 185°F)
- ADAM-4115: -40 ~ 85°C (-40 ~ 185°F)

Ordering Information

- **ADAM-4115** Robust 6-Ch RTD Input Module
- **ADAM-4015** 6-ch RTD Module with Modbus

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advantech:](#)

[ADAM-4015-CE](#) [ADAM-4015-F](#) [ADAM-4115-C](#)