


AIW-355

Highly-integrated 5G WWAN module with M.2 3052 Key-B form-factor

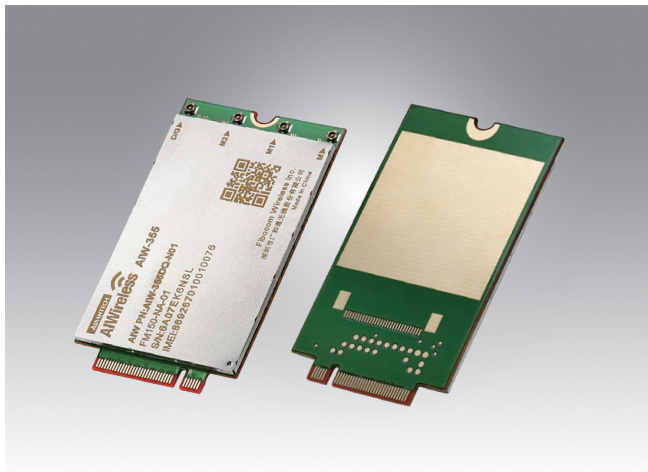

Features

- 5G NR SUB6/LTE FDD/LTE TDD/WCDMA systems
- Max UL peak rate of 900Mbps
- Max DL peak rate 2.5 Gbps NR Sub6 EN-DC
- UL Max support 2 MIMO
- DL Max support 4 MIMO
- Normal operating temperature: -30 ~ 75 °C (-22 ~ 167 °F)
- Storage temperature: -40 ~ 85 °C (-40 ~ 185 °F)
- Extend operating temperature: -40 ~ 85 °C (-40 ~ 185 °F)
- GNSS: GPS/GLONASS/Galileo/Beidou/QZSS

Introduction

Advantech AIW-355 is a highly integrated 5G WWAN module that uses a M.2 form-factor interface. It supports 5G NR SUB6/LTE FDD/LTE TDD/WCDMA systems and can be applied to most mobile carriers' cellular networks.

Specifications

Main Chipset	QUALCOMM SDX55		
Antenna	4pcs X 5G Antenna, or 3pcs X 5G Antenna + 1pcs X GNSS antenna		
Band	AIW-355DQ-E01 - NR: n1,n3,n5,n8,n20, n28, n38,n41, n77, n78, n79 - LTE FDD: Band 1,3,5,7,8,19,20,28 - LTE TDD: Band 38,40,41,42,43 - WCDMA: B1, 3, 5, 8,19 - GNSS: support GPS, GLONASS, Galileo, BDS, QZSS	AIW-355DQ-C01 - NR: n1, n28, n41, n77, n78, n79 - LTE FDD: Band 1,2,3,5,7,8 - LTE TDD: Band 34,39,40,41 - WCDMA: B1, 2, 5, 8 - GNSS: support GPS, GLONASS, Galileo, BDS, QZSS	AIW-355DQ-N01 - NR: n2, n5, n7, n12, n14, n25, n41, n48, n66, n71, n78 - LTE FDD: Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 29, 30, 66, 71 - LTE TDD: Band 41, 42, 43, 48] LAA Band 46 Receiver only - WCDMA: B1, 2, 4, 5, 8 - GNSS: Support GPS, GLONASS, BDS, Galileo, QZSS
Data Throughput	Max DL peak rate 2.5 Gbps NR Sub6 EN-DC Max UL peak rate of 900Mbps		
Interface	USB 3.1		
Operation Voltage	3.135 ~ 4.4V, Typical 3.8V		
Power Consumption	2.5A		
O.S Supported	Windows 10, Linux (Ubuntu 20.04)		
Temperature Ranges	Normal operating temperature: -30 ~ 75 °C (-22 ~ 167 °F) Storage temperature: -40 ~ 85 °C (-40 ~ 185 °F) Extend operating temperature: -40 ~85 °C (-40 ~ 185 °F)		
Dimensions (L x W x H)	30 x 52 x 2.3 mm/1.18 x 2.04 x .09 in (B-key)		

Ordering Information

Part No.	Product Description
AIW-355 DQ-E01	5G(Sub-6G)/LTE/WCDMA module, with GNSS, for EU
AIW-355 DQ-N01	5G(Sub-6G)/LTE/WCDMA module, with GNSS, for US
AIW-355 DQ-C01	5G(Sub-6G)/LTE/WCDMA module, with GNSS, for China

Suggested Antennas and Cables

Part No.	Specifications
1751000360-01	GNSS antenna, 1575 MHz, Antenna Gain 4.5 dBi, RHCP, SMA male, L=2000 mm/78.74 in
1751000361-01	GNSS antenna, 1575 MHz, Antenna Gain 4.5 dBi, RHCP, SMA male, L=5000 mm/196.85 in
1750008569-01	Coaxial Cable, 300 mm/11.8 in, SMA (F) to MFH4
1750009372-01	5G(Sub-6G)/LTE/WCDMA full band dipole antenna, antenna, 167 mm/6.57 in

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advantech:](#)

[AIW-355 DQ-C01](#) [AIW-355 DQ-E01](#) [AIW-355 DQ-N01](#)