
# **DB9M to DB9F Serial Cables**

Models BB-9PAMF1, BB-9PAMF3, BB-9PAMF6, BB-9PAMF10, BB-9PAMF15, BB-9PAMF25



www.advantech.com

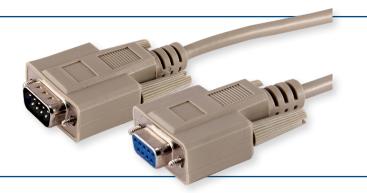


## **PRODUCT FEATURES**


- + Fully molded backshell with strain relief for extra protection
- + 28 AWG stranded conductors for flexibility
- + Thumbscrews for tool-less termination
- + DB9 male to DB9 female

#### **ORDERING INFORMATION**

MODEL NUMBER	LENGTH
BB-9PAMF1	0.3 meters (1 ft)
BB-9PAMF3	0.9 meters (3 ft)
BB-9PAMF6	1.8 meters (6 ft)
BB-9PAMF10	3.1 meters (10 ft)
BB-9PAMF15	4.6 meters (15 ft)
BB-9PAMF25	7.6 meters (25 ft)

### **MECHANICAL DIAGRAM**

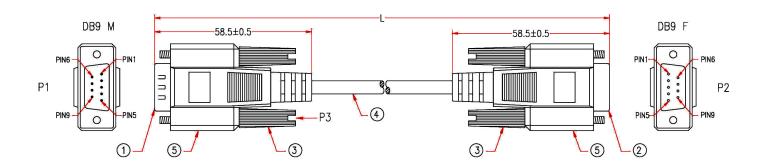



\*NOTE: All relevant materials are complied with RoHS directive

NOIL.	All relevant materials are complied with Norio a	
5	BLACK PVC TUBE ø3.0*22mm	
	ALUMINUM FOIL 33*65mm	
	MOLDED PE COLOR TRANSPARENT	
	MOLDED PVC BEIGE	
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051	
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	

All product specifications are subject to change without notice. BB-9PAMFxx\_0520ds



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

B+B SmartWorx:

9PAMF3 9PAMF15 9PAMF10 9PAMF1