
IMC-150L

Industrial Long Reach Ethernet over **UTP/Coaxial Extender**



Features

- Extends Ethernet up to 800m at 10 Mbps or 500m at 100 Mbps over UTP cable
- Extends Ethernet up to 1km at 10 Mbps or 500m at 100 Mbps over Coaxial cable (IMC-150LI)
- Railway Trackside EN 50121-4
- Features Link Fault Pass Through (LFPT)
- Switch-selectable for configuring LAN rate and connection type
- Dual design with PoE+ PD/PSE (IMC-150LPI)

Introduction

Injecting data and power together, the IMC-150L series offers brand new leading products which break the 100-meter limitation for greater Ethernet transmission distances. The series supports 10/100Mbps Ethernet over twisted pair cable (CAT-5, UTP) or coaxial cable. It provides a user configurable DIP switch selection of LFPT features, force speed setting, and is flexible and freely extends existing Ethernet networks to reach remote IP devices.

The IMC-150LPI PoE+ extender is compliant with the IEEE 802.3at PoE+ standard and delivers data and power over Ethernet cable without the distance limitations of traditional copper wires. It can extend data and power transmission reach up to 800 meters. Acting as both power sourcing equipment (PSE) and a powered device(PD), the power source from the PoE+ switch or power with 48Vpc input reaches both local and remote sites. The IMC-150L extender provides a combo twisted pair cable (CAT-5, UTP) and coaxial cable which transmit data up to 1 km via coaxial cable. The IMC-150L series offers effective point-to-point Ethernet extenders; offering the best solution for commercial buildings, harsh environments, airports, and virtually anywhere that requires Ethernet transmission over 100 meters.

Specifications

Communications

 Standard LAN Transmission Distances Transmission Speed 	IMC-150LPI IEEE 802.3, 802.3u, 802.3x, 802.3at/af IMC-150LI IEEE 802.3, 802.3u, 802.3x 10/100Base-T(X) See product startup manual Up to 100 Mbps		
Interface			
 Connectors 	IMC-150LPI 1 x 10/100Mbps RJ-45 PD 1 x 10/100Mbps RJ-45 PSE IMC-150LI 1 x 10//100Mbps RJ-45 1 x 10/100Mbps Combo UTP/COAX		
 DIP Switch 	LFPT, AUTO-Nego, Speed, UTP/COAX PIN 1 LFPT ON/OFF PIN 2 AUTO ON/OFF (OFF to take effect for PIN 3) PIN 3 SPEED ON:100Mbps / OFF:10Mbps PIN 4 ON:COAX / OFF:UTP (PIN 4 is only for IMC-150LI)		
 LED Indicators 	INC-150LI) IMC-150LPI: PWR, 1-PAIR, PSE P1/PD 10M LNK/ACT, 100M LNK/ACT P2/PSE 10M LNK/ACT, 100M LNK/ACT IMC-150LI: PWR, 1-PAIR, COAX P1 10M LNK/ACT, 100M LNK/ACT P2 10M LNK/ACT, 100M LNK/ACT		
Power			
 Power Consumption 	IMC-150LPI: 33W (Full load PoE+) IMC-150LI: 2.401W		
 Power Input 	IMC-150LPI 48V DC IMC-150LI 12 ~ 48V DC		

Mounting Protection

Enclosure

Physical

 Reverse Polarity Present

Environment

- **Operating Temperature** -40 ~ 75°C (-40~167°F)
- -40~85°C (-40~185°F) Storage Temperature
- **Operating Humidity** 10 ~ 95% (non-condensing)
- Storage Humidity 10 ~ 95% (non-condensing)

Certification

ortinoation	
= EMI	CE, FCC
EMS	EN 61000-4-2
	EN 61000-4-3
	EN 61000-4-4
	EN 61000-4-5
	EN 61000-4-6
	EN 61000-4-8
 Railway Trackside 	EN 50121-4
Shock	IEC 60068-2-27
 Freefall 	IEC 60068-2-32
 Vibration 	IEC 60068-2-6
 Patent 	http://www.advantech.com/legal/patent

Ordering Information

•	IMC-150LPI	Industrial Long Reach PoE+ Extender
•	IMC-150LI	Industrial Long Reach Ethernet over U

Industrial Long Reach Ethernet over UTP/Coax Extender

IP30, Metal shell with solid mounting kits

Dimensions (W x H x D) 92.58 x 21.08 x 98.04 mm (3.65 x 0.83 x 3.86 in.)

DIN-Rail, Wall


XIMC-FSP065-DFAN3 Power Adapter, 100~240V, 50~60Hz, 48.0V 1.36A (sold separately)

Power Output Connectors

30W

2P Pluggable Terminal Block, DC Jack

IMC-150L

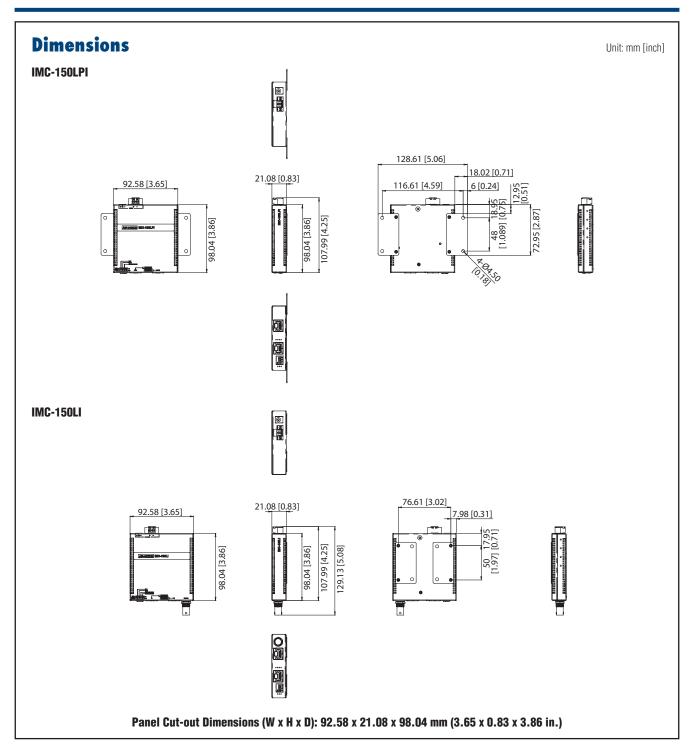

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advantech: IMC-150LI