

**B&B ELECTRONICS**

10/100 Mbps Ethernet Media Converter

iMcV-MediaLinX & IE-iMcV-MediaLinX

PRODUCT FEATURES

- Available for multi-mode or single-mode fiber
- Double fiber capacity with single-strand fiber versions
- IE-iMcV-MediaLinX supports SFP transceivers and extended operating temperatures
- Modular, hot-swappable architecture reduces operational costs associated with product installation, upgrades and maintenance
- SNMP Manageable
- Converts 10 or 100 Mbps Copper to 100 Mbps Fiber
- Supports Configuration Control
- Features Link Fault Pass-Through (LFPT)

Satisfying today's networking needs while preparing for tomorrow's cabling requirements can make designing and installing the physical layer of networks a daunting task. The decreasing cost of fiber optic cabling and switching equipment makes all-optical LANs the obvious choice when future-proofing network equipment. Replacing legacy equipment and wiring infrastructure is a costly choice. Managed media conversion allows implementation of new technologies on existing networks, while monitoring all connections, to keep networks running and up-to-date.

B&B Electronics offers a wide range of SNMP-managed Ethernet copper to fiber media converters, with a choice of fixed rate or rate conversion capabilities. The "iMcV-" modules also include troubleshooting features and LEDs to assist in network diagnostics as well as make isolating cable breaks easier. The iMcV-MediaLinX and IE-iMcV-MediaLinX also features Link Fault Pass-Through. In addition, the IE-Module provides support for Config Control if using SNMP management.

All converters feature an RJ-45 copper port and a fiber port, with a choice of SC, ST or SFP (IE-iMcV-MediaLinX only) connectors, and are hot-swappable.

Rate converters employ Auto Negotiation functionality on the twisted pair port for plug-and-play operation, or they can be manually configured for the desired speed and duplex mode.

*iView: Windows 2000/XP/Vista/Win7*

ORDERING INFORMATION

MODEL NUMBER	FIBER	FIBER PORTS	RANGE	ETHERNET PORTS	ETHERNET CONNECTOR
IE-iMcV-MediaLinX TX/SFP 10/100 Mbps with (LFPT) and Config Control * **					
856-18700	SFP	1	Various	1	RJ45
iMcV-MediaLinX TX/FX 10/100 Mbps with (LFPT) and Config Control					
856-15711	MM850-ST	1	2 km	1	RJ45
856-15712	MM850-SC	1	2 km	1	RJ45
856-15713	MM1300-ST	1	5 km	1	RJ45
856-15714	MM1300-SC	1	5 km	1	RJ45
856-15717	SM1310/PLUS-ST	1	40 km	1	RJ45
856-15718	SM1310/PLUS-SC	1	40 km	1	RJ45
856-15719	SM1310/LONG-ST	1	80 km	1	RJ45
856-15720	SM1310/LONG-SC	1	80 km	1	RJ45
856-15723	SM1550/LONG-SC	1	80 km	1	RJ45
SINGLE STRAND FIBER *					
856-15731	SSFX-SM1310-SC (1310xmt/1550rcv)	1	20 km	1	RJ45
856-15732	SSFX-SM1550-SC (1550xmt/1310rcv)	1	20 km	1	RJ45
856-15733	SSFX-SM1310/PLUS-SC (1310xmt/1550rcv)	1	40 km	1	RJ45
856-15734	SSFX-SM1550/PLUS-SC (1550xmt/1310rcv)	1	40 km	1	RJ45
856-15735	SSFX-SM1310/LONG-SC (1310xmt/1550rcv)	1	60 km	1	RJ45
856-15736	SSFX-SM1550/LONG-SC (1550xmt/1310rcv)	1	60 km	1	RJ45

* These products have single-strand fiber technology. Deploy in pairs or connect another compatible B&B IMC LLC single-strand fiber product.

** SFP Fiber sold separately

iMcV-MediaLinX 10/100 Mbps also available in CWDM Fiber. Call for details.

10/100 Mbps Ethernet Media Converter

iMcV-MediaLinX & IE-iMcV-MediaLinX






SPECIFICATIONS

TECHNICAL

IEEE 802.3 10Base-T
IEEE 802.3u 100Base-TX
IEEE 802.3u 100Base-FX or SX fiber
IE-SFP 100/155 Mbps (OC-3) (IE-iMcV-MediaLinX)
Supports jumbo packets up to 1916 bytes
Supports Config Control
Connectors: RJ-45 and ST, SC, LC or SFP
IEEE 802.3x Flow Control
AutoCross for MDI/MDIX
Features LinkLoss and FiberAlert
Features Link Fault Pass-Through (LFPT)
Features Auto Negotiation and Selective Advertising
Layer 2 packet switching, store and forward operation
Forwarding rate: 14,881 pps for 10 Mbps; 148,810 pps for 100 Mbps; 1,488,100 pps for 1000 Mbps (Gig only)
50/125µm or 62.5/125µm multi-mode fiber
9/125µm single-mode fiber
Available for single-strand fiber
Installs in any iMediaChassis or MediaChassis
Supports GUI-Based iView ²
Supports Half- and Full-Duplex operation
Includes diagnostic LEDs
Includes hot-swappable architecture

MECHANICAL DIAGRAM

(dimensions in inches)

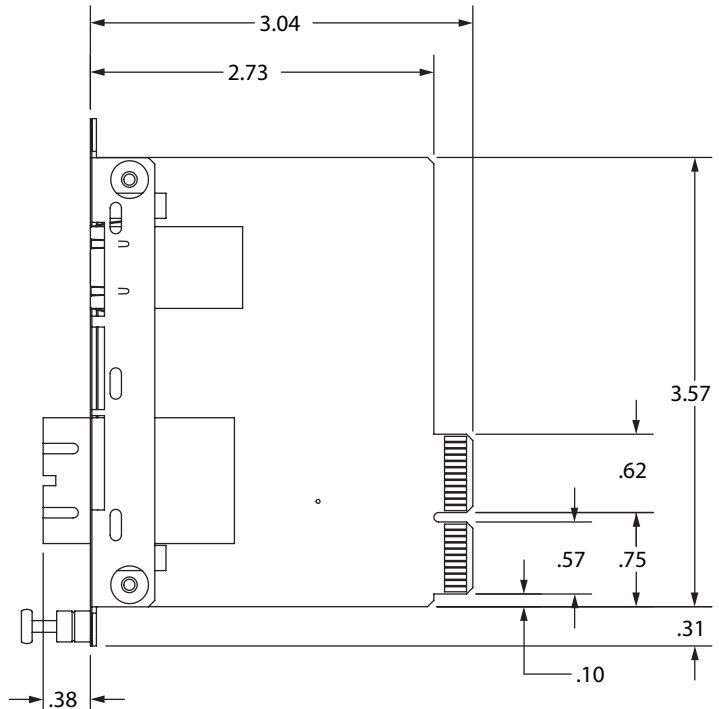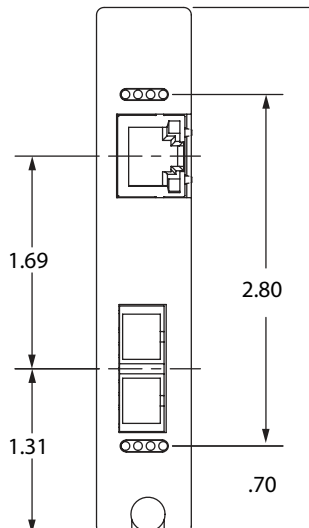

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

B+B SmartWorx:

[856-15733](#) [856-15717](#) [856-15736](#) [856-15723](#) [856-15711](#) [856-15732](#) [856-15719](#) [856-15714](#) [856-15734](#) [856-15718](#) [856-15712](#) [856-15720](#) [856-15731](#) [856-15735](#) [856-15713](#) [856-18700](#) [IMC-750I-SFP](#) [IMC-750-SE](#) [IMC-750-SEST](#) [IMC-750-SSER](#) [IMC-750-SSET](#) [IMC-750-SSLR](#) [IMC-750-SSLT](#) [IMC-750-SSR](#) [IMC-750-SST](#)