


TABLE 1									
DASH NO	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	E DIA	CABLE ENTRY DIA	ASSEMBLE PER	CABLE TYPE
-7	TRC-50-2 TRC-75-2	1.165	.096	.438	.438	.500	.274	TAI-189	TRIAx
-8	8227, BELDEN	1.740	.130	.625	.688	.750	.345	TAI-103	TWINAX
-9	TWC-78-2 TWC-124-2	1.165	.096	.438	.438	.500	.285	TAI-102	
-9A	BL782, TIMES		3	3					
3	BL982, TIMES BL1242, TIMES		3	3					
-10	RG-22 754E, AT&T	1.740	.130	.625	.688	.750	.455	TAI-103	
-11	760A, AT&T						.347		
-12	16PEVL, AT&T VI-AL, GENERAL						.485	TAI-128	
-13	TRF-59, TIMES						.362	TAI-129	
-13A	8232, BELDEN						.352	TAI-165	
-14	8233, BELDEN						.490	TAI-129	TWINAX
-23	250-3884, MICRODOT						.183	TAI-189	
-24	202-3934, MICRODOT						.191	TAI-102	
-24A	9530A5117, RAYCHEM						.200	TAI-189	
-25	T-43M, GENERAL						.285	TAI-102	
-25A	5021H5331, RAYCHEM	1.165	.096	.438	.438	.500	.191	TAI-189	TRIAx
-26	7028A5518, RAYCHEM								
-27	1191PSJ2619EN, WOVEN 202-3927, MICRODOT 202-3942, MICRODOT							.145	
-29	TWC-78-1/TWC-124-1A							.191	
-30	761A, AT&T 8441, BELDEN							.235	
-32	TRC-50-1						.191	TAI-102	TWINAX
-33	TRC-75-1						.217		
-42	21-204, ESSEX 4463, CONSOLIDATED						.300		
-43	250-4044/250-4045 293-3930, MICRODOT						.200		
-45	M27500-22TE2114 1100-66F, STANDARD						.183		
-46	9860, BELDEN	1.740	.130	.625	.688	.750	.475	TAI-103	TWINAX
-47	M177176-00002	1.165	.096	.438	.438	.500	.164	TAI-102	
-49	TWC-78-1F2	1.740	.130	.625	.688	.750	.132		
-54	89207, BELDEN						.323	TAI-103	
-55	89272, BELDEN						.250	TAI-102	
-56	GC875GCI, GRUMMAN	1.165	.096	.438	.438	.500	.191	TAI-189	TRIAx
-57	GC875GBI, GRUMMAN						.198	TAI-102	
-58	GC875TM24H, GRUMMAN								
-59	GC875LNI, GRUMMAN								
-60	M177177, THERMATICS 380-10045, BOEING						.217	TAI-189	
-64	7528A5314, RAYCHEM	.183							

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
AD	ECO 52460	6/18/10	CSM

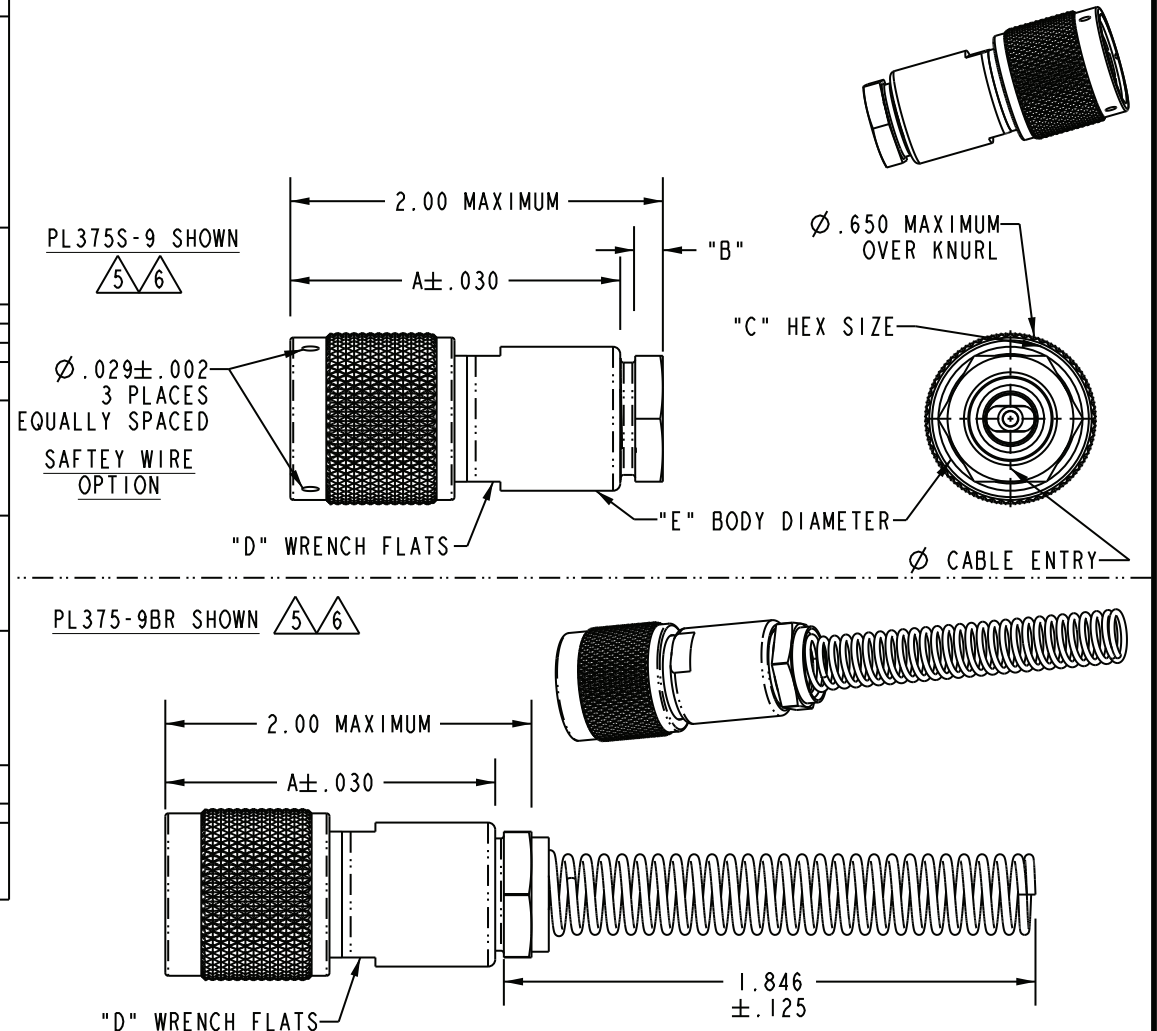

- 6 IF SAFETY WIRE TYPE & BEND RELIEF SPRING READ ADD SUFFIX "SBR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)
- 5 IF BEND RELIEF SPRING READ (SEE FIG 2) ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)
- 4 IF SAFETY WIRE TYPE READ ADD SUFFIX "S" TO MODEL NO (PL375S)
- 3 CLAMP NUT OMITTED

7. EXAMPLE OF COMPLETE MODEL NO:
PL375 S -7 BR

BASIC MODEL NO

BEND RELIEF (OMIT IF NOT READ)

SAFETY WIRE TYPE (OMIT IF NOT READ)

DASH NO (CABLE GROUP, TABLE 1)

2. CONCENTRIC TWINAX/TRIAx TRT CABLE PLUG

1 FINISH: TFS-1A (NICKEL)

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 .XXXX ± .0010 ANGLE ± 1° 00'  CRITICAL		 EMERSON TM Network Power		Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256	
DRW	BPK	7/29/11	MATERIAL:	TITLE: PL375 / PL375S PL375BR / PL375SBR			
CHK	CSM	8/1/11					
QUALITY							
MANUF							
APPROVED				SIZE	CAGE CODE	DRAWING NO.	REV.
				A	14949	315-0011	AD
PROT FILE NO. 315-0011		DO NOT SCALE DWG		SCALE	1/1	DATE	SHEET
					5/23/73		1 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[PL375-32](#) [PL375-33](#)