

5

4

3

2

1

D



C

Description: See table I

Part No: 27-9300-XX

Application: Attenuation

Crimp Tool: N/A

Impedance: 50 ohm

Frequency Range: 0~2 GHz

Material:

Body	Brass	Nickel plated
Insulator	Delrin	
Contact	Brass	Gold plated
Nut	Zinc	Nickel plated
Label	Self adhesive paper	

RoHS Compliance: Yes

Technical Detail: Refer to Emerson Document P/N 27-0000

DRAWING NO.
27-9300-XX


REVISIONS

01	OFFICIAL RELEASE				2009.09.0
	08-18-09	L	L	T	H

Betty 809.35.59
+0800

D

B

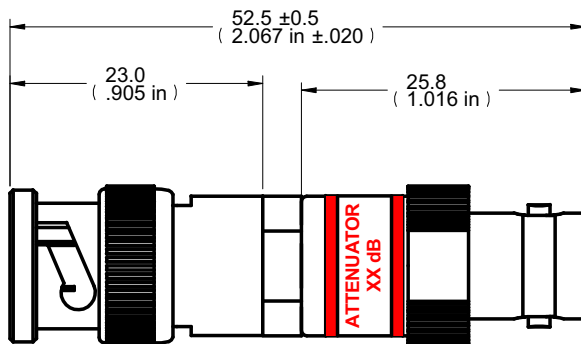

A

DIM OUTLINE

受控 CONTROLLED DOCUMENT

编号 P/N	27-9300-CUST	版本 Rev	01	日期 Rel'd Date	SEP 14,09
-----------	--------------	-----------	----	------------------	-----------

Table I

P/N	Description	VSWR	Attenuation Tolerance
27-9300-3	3DB BNC ATTENUATOR PAD	1.1 TO 1GHz	±0.4 dB TO 1GHz
27-9300-6	6DB BNC ATTENUATOR PAD	1.2 TO 2GHz	±0.45 dB TO 2GHz
27-9300-10	10DB BNC ATTENUATOR PAD	1.35 TO 4GHz	±0.65 dB TO 4GHz
27-9300-20	20DB BNC ATTENUATOR PAD	1.65 TO 8GHz	±1.0 dB TO 8GHz

CUSTOMER COPY

B

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY LINDA.WU	DATE 08-18-09
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 08-18-09
X	± 0.5	APPROVED BY THOMAS	DATE 08-18-09
X.X	± 0.3		
X.XX	± 0.1		
ANGLES	± 0.5°	U/M	mm



TITLE
6DB/3DB/20DB/10DB BNC
ATTENUATOR PAD

SHEET 1 OF 1
DRAWING NO. 27-9300-XX
SIZE A

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

5

4

3

2

1

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[27-9300-3](#)