


- NOTES:
- 1.0 SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 500 MHz
 - 1.2 VSWR (MAX.): 1.25:1
 - 1.3 IMPEDANCE: 50 OHMS
 - 1.4 MAXIMUM INPUT POWER:
 - 2 WATTS AVERAGE AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
 - 1.5 OPERATING TEMPERATURE RANGE:
 - −55°C to +125°C
 - △2

 EPOXY SEAL UNIT AS SHOWN PER EPX-08000-44-01.
 - 3.0 MARKING: MARK UNIT AS SHOWN. (REF: INK-03264-27-04)
 - 4.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

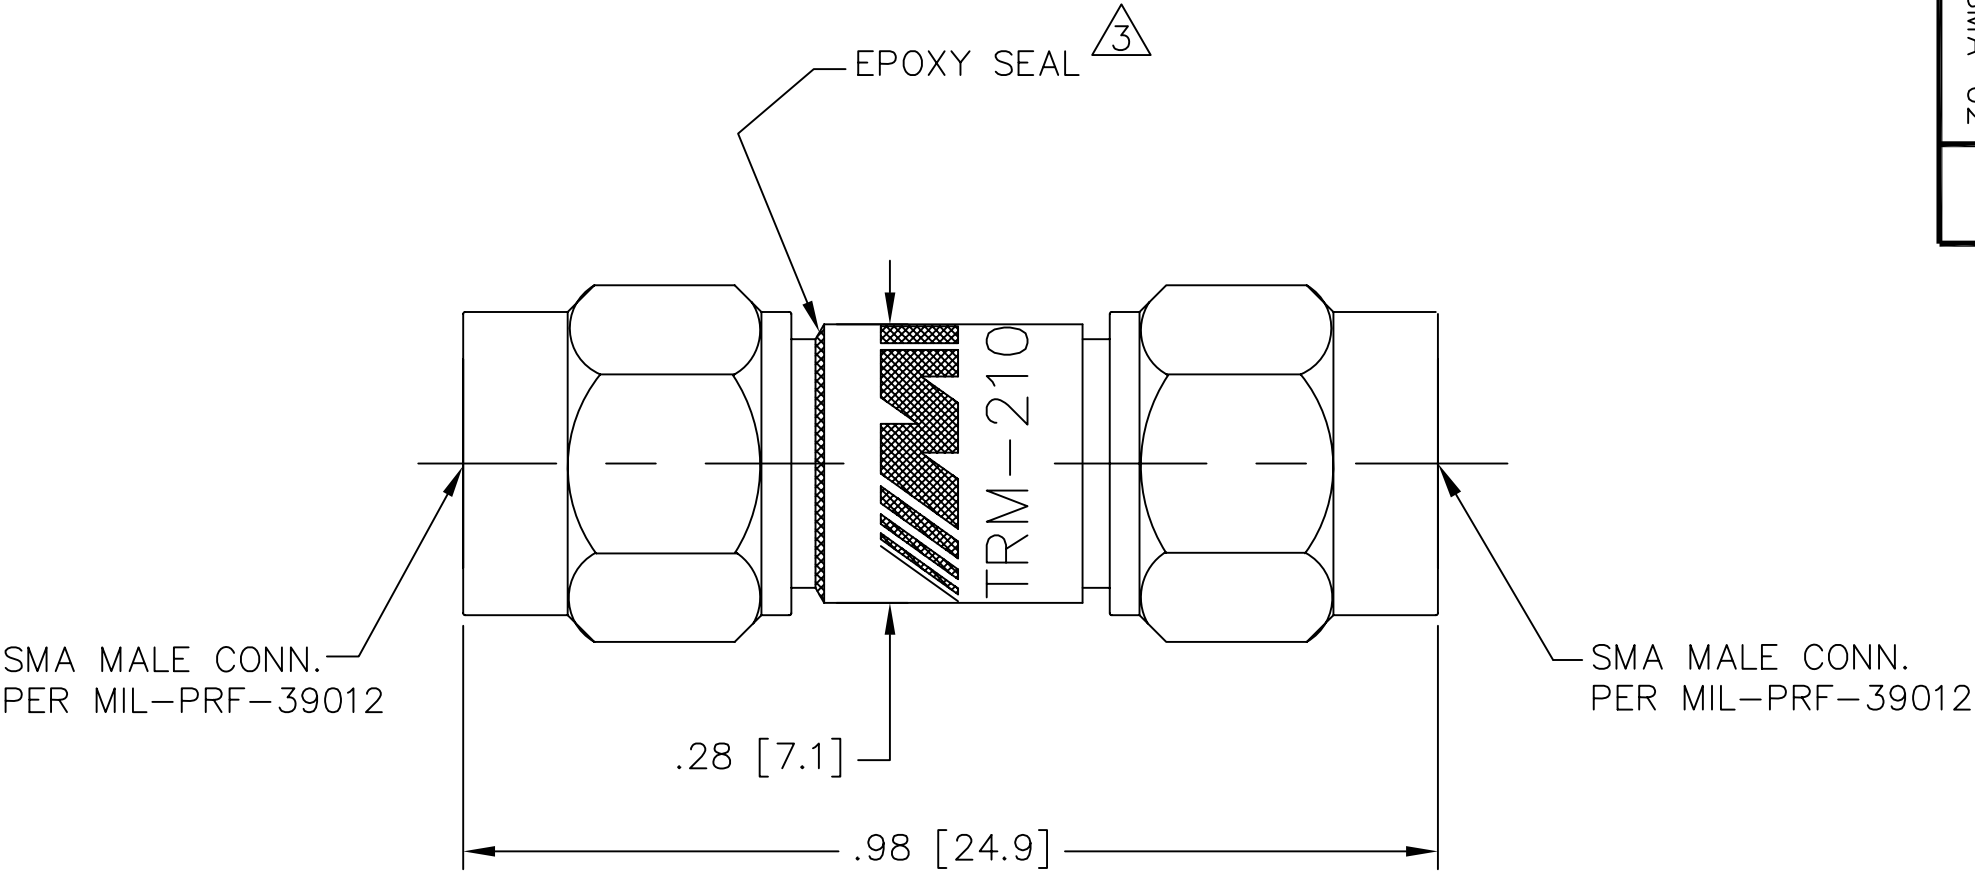

MODEL NUMBER	REV.
TRM-2106-MM-SMA-02	-

REV.	DESCRIPTION	DATE
-	RELEASED	12/2/02

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078		MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION	
DRAWN/DATE S.ORLOV 11/26/02		ENG./DATE G.KOZAK 11/27/02		DRAWING NUMBER TRM-2106-MM-SMA-02
CHECKED/DATE		APPROVED/DATE		
		SCALE: 5=1		SHEET 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[TRM-2106-MM-SMA-02](#)