
2		1
.420 [10.68MM] MIN PIN PIN PIN PIN PIN PIN PIN P	72±1.2 [1830±30]	
NOTES: 1. COMPLIANT WITH DISPLAYPORT 1.4 SPECIFICATION. 2. CONNECTOR COMPONENTS: TRANSPARENT DUST COVER INSIDE MOLDING: LDPE STRAIN RELIEF: 45P PVC, BLACK OUTSIDE MOLDING: ABS, BLACK SHELL PLATING: GOLD FLASH CONTACT: GOLD PLATING CABLE: DP1.4 [30AWG(7/0.10TC)+EAM]*5P+30AWG(7/0.10TC)*4C+AEB(16/10/0.12 85%AL) OD: 0.24 [6.0] COLOR: BLACK CABLE PRINTING: DISPLAYPORT CABLE E342987 SM AWM STYLE 20276 80°C 30°V VW-1 3. ELECTRICAL TESTING: 100% OPEN & SHORT & CONTINUITY WIRE TEST CONTACT RESISTANCE: 2 OHM MAX. INSULATION RESISTANCE: 10M OHM MIN. HI-POT:100V DC/10ms 4. PACKAGING: ONE CABLE PER BAG		CONN.1 CONN.1 1 0 <
(1) CABLE	RoHS 2002/95/EC	DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE MITHOUT NOTICE DIMENSIONS: INCHES [METRIC] UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1' SHEET NO. 1 OF 1 AutoCAD 1

ASSEMBLY FORMAT REV. 6/3/05

Α

В

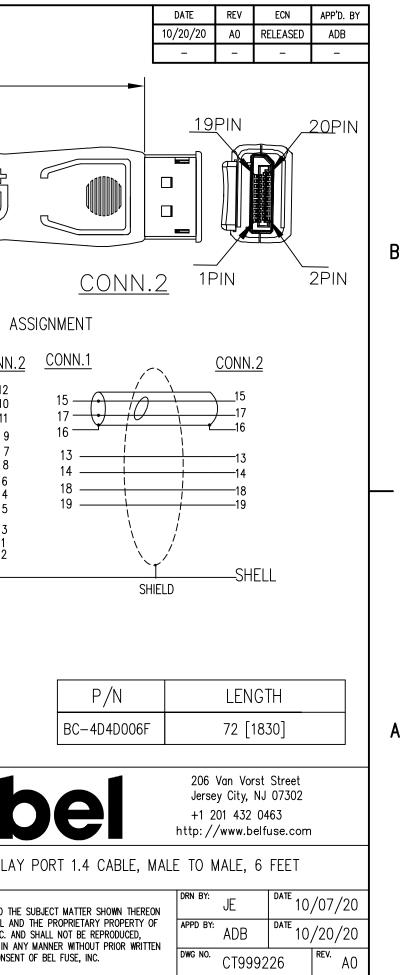

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

BC-4D4D006F