PART NUMBER	REV	ECO	DATE
	1	INITIAL RELEASE	04SEP2020
134-1000-043			

NOTES:

1. MATERIAL AND FINISH:


- 1.1 BODY: STAINLESS STEEL, PASSIVATED BERYLLIUM COPPER, GOLD PLATE
 1.2 CONTACT: BERYLLIUM COPPER, GOLD PLATE
 1.3 INSULATOR: ULTEM 1000, AMBER
- 2. ELECTRICAL SPECIFICATIONS:
 - 2.1 IMPEDANCE: 50 OHMS NOMINAL
 - 2.2 FREQUENCY RANGE: DC~40 GHz
 - 2.3 VSWR: 1.25 MAX
 - 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 250 VRMS MIN
 - 2.5 INSULATION RESISTANCE: 3500 MEGOHM MIN

2.6 CONTACT RESISTANCE:

2.6.1 CENTER CONTACT - 6.0 MILLIOHM MAX 2.6.2 OUTER CONDUCTOR - 2.0 MILLIOHM MAX

- 3. MECHANICAL SPECIFICATIONS:
 - 3.1 ENGAGE/DISENGAGE FORCE: 0.23 Nm MAX (2.92MM)
 2.5 LBS MAX/4.5 LBS MAX (SMP3 FULL DETENT)
 1.2 LBS MAX/1 LBS MAX (SMP3 SMOOTH BORE)
 3.2 CONTACT RETENTION: 22 N MIN
 3.3 DURABILITY: 500 CYCLES MIN (2.92MM)
 100 CYCLES MIN (SMP3 FULL DETENT)
 500 CYCLES MIN (SMP3 SMOOTH BORE)
- 4. ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012) 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B 4.2 OPERATING TEMPERATURE: -65°C TO 165°C 4.3 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106 4.4 MECHANICAL SHOCK: MIL-STD-202, METHOD 213, CONDITION I 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D

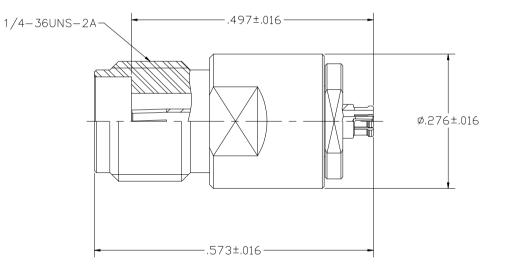

	Model No: 134-1000-043		JOHNSON				
This PROPRIETARY Document is property of Cinch Connectivity Solutions.It is confidential in nature, non-transferable, and issued with the clear	ROHS (EU)/2015/863 COMPLIANT	Cage Code 3RD ANGLE PROJECTION	TITUE: ADAPTER ASSEMBLY, 2.921 FEMALE TO SMP3 FEMALE				Л
and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.	800.±XXX.	Drawn by: TOMMY REN	Drawing N	°. 134—1000	0-043		rev. 1
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	.XXXX±.004 ANGLES±5°	^{Date:} 09/04/2020	^{Size} B	DO NOT SCALE DRAWING	Workmanship Std: S NONE	^{iheet} 1 OF	1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: 134-1000-043