





## NOTES:

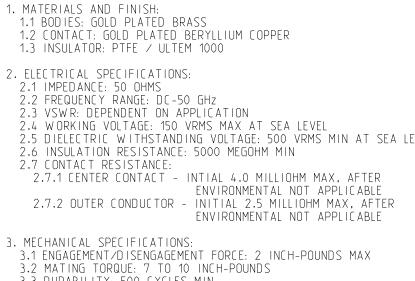

- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN AT SEA LEVEL
- 3.3 DURABILITY: 500 CYCLES MIN
- 4. ENVIRONMENTAL:
- (MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012) 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B 4.2 OPERATING TEMPERATURE: -65 °C TO 165 °C 4.3 CORROSION: MIL-STD-202, METHOD 101, CONDITION B 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106



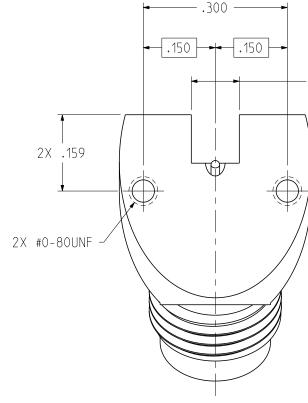




REV	ECO	DATE
1	INITIAL RELEASE	09SEP2021

- .100



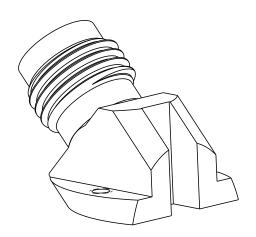

SCALE 4:1

	147-070	1-281/290	JOHNSON		
ARY Document is nch Connectivity is confidential n-transferable.	ROHS M (EU)/2015/863 COMPLIANT	Cage Code 3RD ANGLE PROJECTION	Tine: 2.4MM JACK, 45 DEGREE, PCB MOUNT		
with the clear that it is not copied without d is returnable demand.	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003	rawn by: Roman Yao	Drawing No. 147-0701-281/290	те <b>v</b> . 1	
DRAWING IN NCE WITH 4.5-2009.	.XXXX ± .0010 ANGLE ± 2°	Date: 09/09/2021	Size B DO NOT SCALE Workmanship Std: Sheet 1 OF 1		

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: 147-0701-281