

LDT2400 Series

2400W Multipurpose Digital DIN Rail Power Supply

LDT2400 Series are high power multipurpose digital power supplies with three phase input voltage 400 – 500 VAC, delivering 2400 W of output power, covering output voltages from 24 to 170 V (model dependent).

Their compact size, high efficiency and excellent reliability together with easy installation make them fit demanding applications where compactness and high power are needed.

LDT2400 Series are Class I isolation devices suitable for SELV and PELV circuitry (up to 48 VDC models) and are designed to be mounted on DIN rail and installed inside a protective enclosure.



Key Features & Benefits

- 3 phase AC input: 400 – 500 VAC
- Overload 150% (3600 W peak)
- Active PFC for optimal efficiency
- Active input surge suppressor for improved reliability
- CPU control allows flexibility and multiple programmable features
- Battery charger function included
- Thermally regulated fan optimal cooling in harsh operating conditions
- Wide output voltages range
- Two phase operation possible with power derating

Applications

- Automation
- Process Control
- Communication
- Instrumentation Equipment

1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT
LDT2400-24	400 - 500 VAC / 520 - 725 VDC	3	24 VDC	100 A
LDT2400-48	400 - 500 VAC / 520 - 725 VDC	3	48 VDC	50 A
LDT2400-72	400 - 500 VAC / 520 - 725 VDC	3	72 VDC	33 A
LDT2400-170	400 - 500 VAC / 520 - 725 VDC	3	170 VDC	14 A

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 400 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range ¹	3 phase (UL certified) Operating	400 – 500 VAC 340 – 550 VAC
Input DC Voltage Range		520 – 725 VDC
Input Frequency		47 - 63 Hz
Input AC Current	Vin = 400 VAC	4.5 A
	Vin = 500 VAC	3.5 A
Input DC Current	Vin = 520 VDC	5.2 A
	Vin = 725 VDC	3.8 A
Power Factor Correction	Active	> 0.9
Inrush Peak Current	Active Inrush current limiter	≤ 10 A
Touch (Leakage) Current		≤ 0.6 mA
Internal Protection Fuse	None, external fuse must be provided	
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations	Fuse 3x AT 10 A or 3x MCB 10 A C curve

¹ In case of 2 phase operation, reduce the output load to 50% of the nominal value.

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		2400 W
Rated Voltage (Adjustable Voltage Range)	LDT2400-24	24 VDC (11.9 - 29 VDC)
	LDT2400-48	48 VDC (23 - 56 VDC)
	LDT2400-72	72 VDC (50 - 87 VDC)
	LDT2400-170	170 VDC (85 - 175 VDC)
Continuous Current	LDT2400-24	100 A
	LDT2400-48	50 A
	LDT2400-72	33 A
	LDT2400-170	14 A
Overload Limit (Constant Current Mode)	LDT2400-24	150 A / 5 s
	LDT2400-48	75 A / 5 s
	LDT2400-72	50 A / 5 s
	LDT2400-170	21 A / 5 s
Overload Limit (Hiccup Mode) (max. 5s)	LDT2400-24	150 A
	LDT2400-48	75 A
	LDT2400-72	50 A
	LDT2400-170	21 A
Load Regulation	with Remote Sense active and at Vout nom	≤ 1%
Ripple & Noise ²		≤ 400 mVpp

Hold up Time		≥ 10 ms
Output Protections	Overload (with user settable threshold) Short circuit Thermal protection Output overvoltage	
Output Over Voltage Protection	LDT2400-24 LDT2400-48 LDT2400-72 LDT2400-170	≥ 33 VDC ≥ 68 VDC ≥ 100 VDC ≥ 200 VDC
Parallel Connection	Possible for power or redundancy (includes internal ORing circuit)	
Efficiency	LDT2400-24 / LDT2400-48 LDT2400-72 LDT2400-170	> 92% > 93% > 92%
Dissipated Power	LDT2400-24 / LDT2400-48 LDT2400-72 LDT2400-170	< 200 W < 180 W < 200 W

² Ripple and Noise are measured with 20 MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

³ Pay attention, set the current limitation mode jumper on C.C. mode when connecting more units in parallel.

NOTE: Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range.
Contact factory for details.

4. USER INTERFACE, SIGNALING & CONTROL

PARAMETER	DESCRIPTION / CONDITION
Status Signals	DC OK / CHARGE - green LED ALARM - red LED Dry contact (SPDT, 24 VDC / 1 A) Alphanumeric LCD display
User Interface	LCD with 4 keys 0 – 10 V voltage and 4 - 20 mA current output for output current 0 - 100% IN Auxiliary 12 V / 100 mA isolated power supply Load voltage sense Optoisolated remote shut down input USB communication interface via communication module (COMM-BOX) Optional: remote temperature sensor for battery charging (WNTC-2MT)
Operating Modes	Overboost: allows 150% output power for 5 sec, then off for 10 sec Constant current: adjustable 10 - 100% load Battery charger: for lead acid, nickel and lithium batteries

5. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature ⁴	UL certified up to 50°C (Start-up type tested: - 40°C) ⁵	- 40 to + 70°C
Storage Temperature		- 40 to + 80°C
Derating	Automatic power derating (1200 W) for 2 phase operation	- 60 W/°C over 50°C
Humidity	Non-condensing	5 - 95% RH
Life time Expectancy	At 25°C ambient full Load	458253 h (52.3 years)
Overvoltage Category		III (EN50178)
Pollution Degree		2 (IEC60664-1)
Protection Class		Class I
Isolation Voltage	Input to Output Input to Ground Output to Ground	4.2 kVDC 2.2 kVDC 0.75 kVDC
Standards & Approvals	UL508 (certified) EN60950 (reference) EN50178 (reference)	

EMC Standards	EMC Emission	EN55011 (CISPR11)	Class A
		EN55022 (CISPR22)	Class A
		EN61000-3-2	Class A
	EMC Immunity	EN61000-4-2	Level 3
		EN61000-4-3	Level 3
		EN61000-4-4	Level 4
		EN61000-4-5	Level 4
		EN61000-4-11	Level 2
Protection Degree		EN60529	IP20
Vibration sinusoidal		IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2Hours / axis (X,Y,Z)
Shock		IEC 60068-2-27	30g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total

⁴ For temperature < -20°C the LCD is not operating, but the unit will operate correctly

⁵ Possible at nominal voltage with load derating.

6. PIN LAYOUT & DESCRIPTION

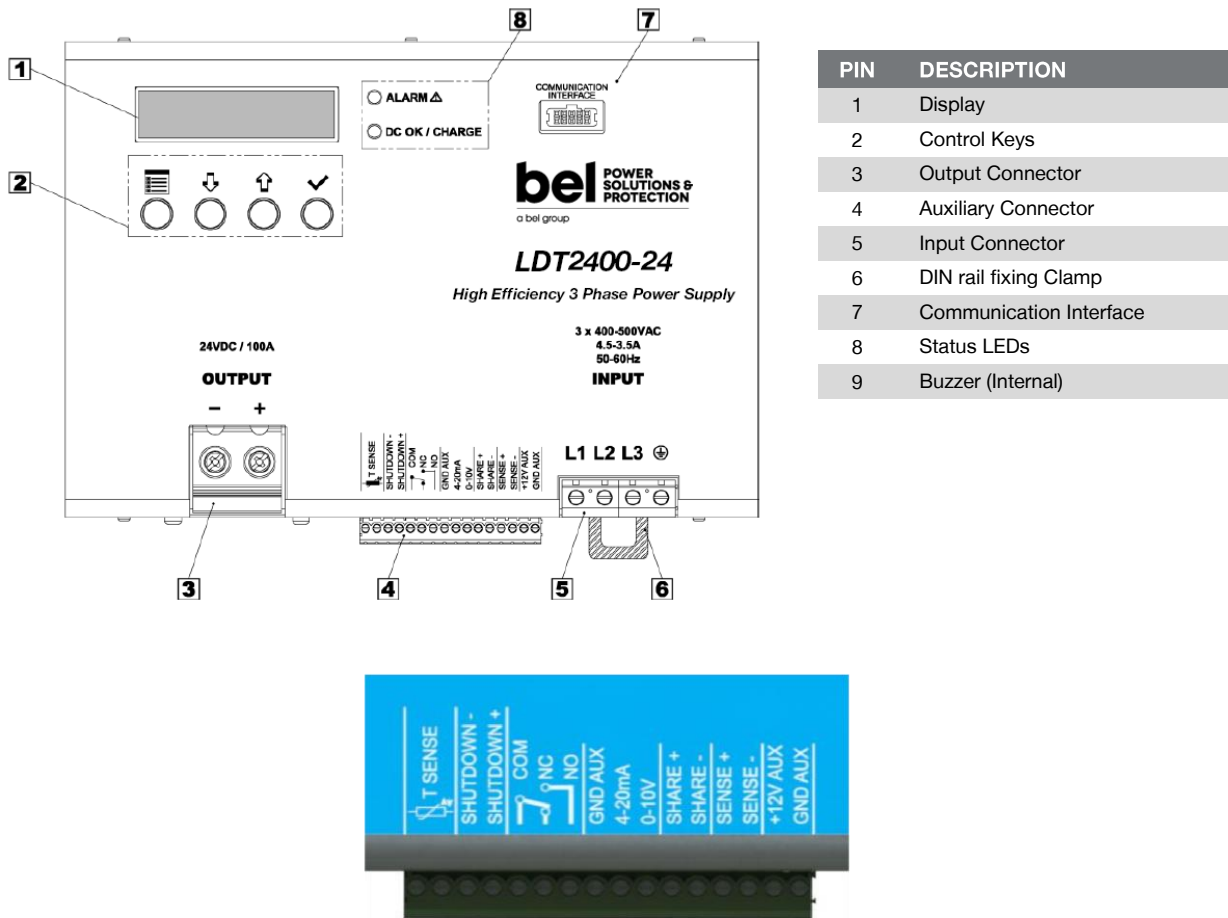


Figure 1. Detail of Auxiliary Connector (4)

INPUT CONNECTIONS	OUTPUT CONNECTIONS	AUXILIARY CONNECTION I/Os
3 phase: L1 = Phase 1 L2 = Phase 2 L3 = Phase 3 ⊕ = earth ground DC: L1 = + Positive DC L2 = - Negative DC L3 = do not connect ⊕ = earth ground	+ = Positive DC - = Negative DC	TSENSE = Temperature Sensor Shutdown = Remote Shutdown (+/-) Dry contact = COM / NC / NO Contact GND AUX = Auxiliary Supply GND 4-20 mA = Output Current Measurement 4-20 mA 0-10 V = Output Current Measurement 0-10 V SHARE = Load Share BUS (+/-) SENSE = Remote Voltage Sense (+/-) +12 V AUX = Auxiliary +12Vdc/100mA GND AUX = Auxiliary Supply GND

7. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION		SPECIFICATION
Weight			2.8 kg
Dimensions			233 x 160 x 101 mm
Rail Mounting			IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Input	Screw type header (16 - 10 AWG)	1.5 – 6 mm ²
	Output	Screw type header (2 AWG)	Up to 35 mm ²
	Auxiliary	Screw type pluggable 16 pin (16 AWG)	1.5 mm ²
Case Material	Aluminum		

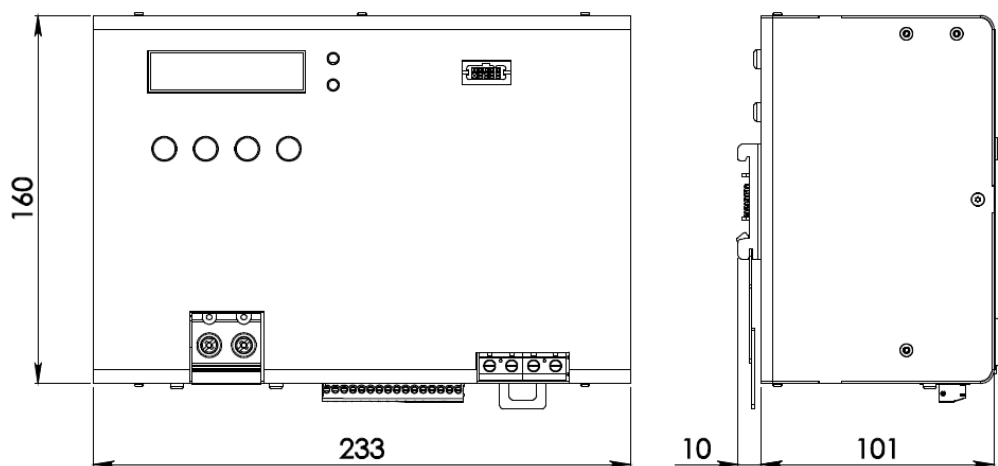


Figure 2. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[LDT2400-48](#) [LDT2400-24](#) [LDT2400-170](#) [LDT2400-72](#)