

Surge Arrester

Surge Arrester for Commercial Applications

Power surges or indirect lightning strikes can create network problems by causing network downtimes with potential of millions of dollars of revenue losses. Midwest Microwave surge arresters can protect networks from surges without sacrificing RF performance. Midwest surge arresters can be used to protect cellular base stations, public safety systems, Wi-Fi networks, active antenna systems, and 5G or GPS applications.

Features

- DC 3 GHz Frequency Range
- VSWR of 1.2
- Insertion loss of 0.3 dB
- Surge capability 8/20µs of 10 kA nominal
- Multi-strike lighting capability
- Tri-alloy plated brass construction
- RoHS compliant (

Applications

- Cellular base stations
- Public safety systems
- Wi-Fi networks
- Active antenna systems
- 5G networks
- GPS systems


Part Number	Description
CGS-1030-00-NNN-34	Commercial grade surge arrester, 3 GHz, N male to N female





Surge Arrester Specifications



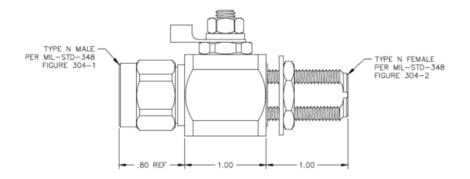

Materials

Housing	Tri-alloy plated brass
Coupling nut	Tri-alloy plated brass
Male Center Contact	Gold-plated brass
Female Center Contact	Gold-plated beryllium copper

Electrical

Frequency Range	DC - 2.5 GHz	2.5 - 3 GHz	
Insertion Loss	0.25 dB	0.3 dB	
Impedance	50Ω nominal		
VSWR	1.20:1 maximum		
Surge Capability, 8/20 µs	10 kA nominal		



Asia-Pacific +86 21 5442 7668 ccs.asia.sales@as.cinch.com

Europe, Middle East +44 (0) 1245 342060 CinchConnectivity@eu.cinch.com North America +1 507 833 8822 ccsorders@us.cinch.com belfuse.com/cinch

© 2019 Cinch Connectivity Solutions

ds-ccs-mwm-surge-arrester-cgs-1030-00-nnn-34-rev4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: CGS-1030-00-NNN-34