


# MBC75 Series

Low Profile

Open Frame Power Supplies

Medical

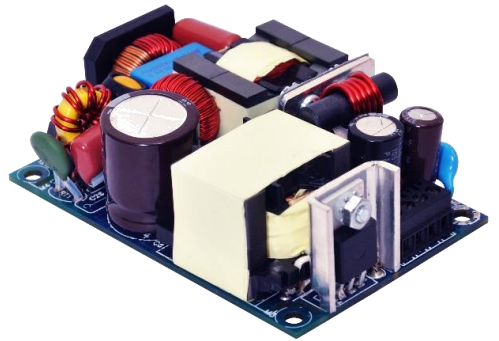

The MBC75 Series of open frame medical power supplies feature a wide universal AC input range of 85 V – 264 VAC, offering 75 W of output power in a compact footprint, with a variety of isolated single output voltages.

The MBC series is designed and approved to the latest Medical standards (EN/IEC 60601-1), providing 2 x MOPP isolation for Class I & Class II applications.

These power supplies are ideal for medical, telecom, datacom, industrial equipment and other applications.

## Key Features & Benefits

- 3 x 2 x 1 Inch Form Factor
- 75 Watts with Convection Cooling
- Efficiency up to 93%
- -40 to 70°C Operating Temperature
- Dual Fusing
- Thermal Shut-Down Feature
- 2 Million Hours, Telcordia -SR332-Issue 3
- No Load Power < 0.3 W
- Approved to EN/IEC 60601-1
- Suitable for BF Applications
- Class II Option Available
- RoHS Compliant
- CE Marked

## Applications

- Diagnostic
- Drug Pump
- Dialysis
- Home Health Care
- Monitoring
- Portable Equipment



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

[belfuse.com/power-solutions](http://belfuse.com/power-solutions)

## 1. MODEL SELECTION

MODEL NUMBER <sup>1</sup>	DESCRIPTION	VOLTAGE	MAX. LOAD CONVECTION	POWER
MBC75-1T12L MBC75-1012L	Screw Terminal Molex Header	12 V	6.25 A	75 W
MBC75-1T15L MBC75-1015L	Screw Terminal Molex Header	15 V	5.00 A	75 W
MBC75-1T24L MBC75-1024L	Screw Terminal Molex Header	24 V	3.12 A	75 W
MBC75-1T30L MBC75-1030L	Screw Terminal Molex Header	30 V	2.50 A	75 W
MBC75-1T48L MBC75-1048L	Screw Terminal Molex Header	48 V	1.56 A	75 W
MBC75-1T58L MBC75-1058L	Screw Terminal Molex Header	58 V	1.29 A	75 W
COVER-120-XBC <sup>2</sup>	Metal cover kit accessory			

<sup>1</sup> Class II version available. Add suffix "-2" at the end of the Model Number

<sup>2</sup> When used in Cover Kit, de-rate output power to 70 % under all operating conditions.

## 2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input Voltage	Universal (Derate from 75 W @ 100 VAC to 65 W @ 85 VAC)	85 – 264 VAC / 390 VDC <sup>3</sup>
Input Frequency		47 – 63 Hz
Input Current	115 VAC: 230 VAC:	1 A max. 0.5 A max.
No Load Power	Typical	< 0.3 W
Inrush Current	115 VAC: 230 VAC: 264 VAC:	25 A 45 A 75 A
Leakage Current	Typical (N.A. For Class II Option) Touch Current	300 uA <100 uA
Power Factor	@ Full Load, Active PFC	> 0.95
Switching Frequency	Typical	60 kHz

<sup>3</sup> Functional, not approved.

### 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Voltage	Refer to Model selection table	From 12 V to 58 V
Output Power	Convection cooling	75 W
Efficiency	48 V, 58 V:	93%
	24 V, 30 V:	91%
	12 V, 15 V:	90%
Hold-up Time	Typical	>16 ms
Line Regulation		+/-0.5%
Load Regulation		+/-1%
Minimum Load		0.0 A
Transient Response	25% step load change, at 0.1A/uS slew rate, 50% duty cycle, 50 Hz = 4%	recovery time < 5 ms
Ripple <sup>4</sup>	For all outputs	1.0 % max.
Output Voltage Adjustment		+/-3%
Rise Time	Typical	55 ms
Set Point Tolerance		+/-1%
Over Current Protection		> 110%
Over Voltage Protection	Latch type (AC recycling required)	110 to 140%
Short Circuit Protection	Hiccup mode	
Cooling	With natural convection cooling for input 100 – 264 VAC	75 W

<sup>4</sup> Ripple is peak to peak with 20 MHz bandwidth and 10 µF (Electrolytic capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

### 4. EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Conducted Emissions	EN 55011-B, CISPR22-B, FCC PART15-B	Pass
Radiated Emissions	EN 55011 A;	Pass
	with external core (King core K5B RC 25x12x15-M in input cable)	Level B
Input Current Harmonics	EN 61000-3-2	Class D
Voltage Fluctuation and Flicker	EN 61000-3-3	Pass
ESD Immunity	EN 61000-4-2	Level 4, Criterion A
Radiated Field Immunity	EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	EN 61000-4-4	Level 3, Criterion A
Surge Immunity	EN 61000-4-5	Level 3, Criterion A
Conducted Immunity	EN 61000-4-6	Level 3, Criterion A
Magnetic Field Immunity	EN 61000-4-8	Level 4, Criterion A
Voltage Dips, Interruptions	EN 61000-4-11	Criterion B


## 5. SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Isolation Voltage	Input to Output: (For medical applications)	4000 VAC
	Input to GND: (Not Applicable for Class II Option)	1500 VAC
	Output to GND: for type BF	1500 VAC
	for type B (N/A for Class II Option)	500 VAC
Protection Level	Primary to Secondary:	2 MOPP
	Primary to Earth:	1 MOPP
	Secondary to Earth:	1 MOPP
Safety Standard(s)	EN60601-1, IEC 60601-1 (ed.3), ANSI / AAMI ES 60601 - 1, CSA C22.2 No. 60601-1	
Agency Approvals	Nemko, UL, C-UL	
CE mark	Complies with LVD Directive	

## 6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature	-40 to 0°C startup guaranteed, with spec deviation <sup>5</sup>	-40 to +70°C
Storage Temperature		-40 to +85°C
Cooling	With natural convection cooling at 100 to 264 VAC	75 W
Relative Humidity	Noncondensing	5% to 95%
Altitude	Operating:	16,000 ft
	Nonoperating:	40,000 ft.
Reliability	MTBF according to Telcordia -SR332-Issue 3	2.00 million hours

<sup>5</sup> Output ripple can be more than 10% of the output voltage.

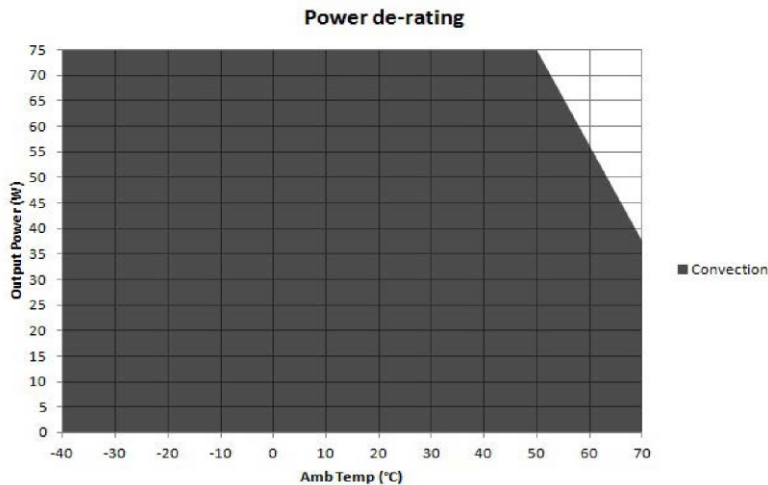

Convection load: 75W up to 50°C  
De-rate above 50 °C @ 2.5% per °C

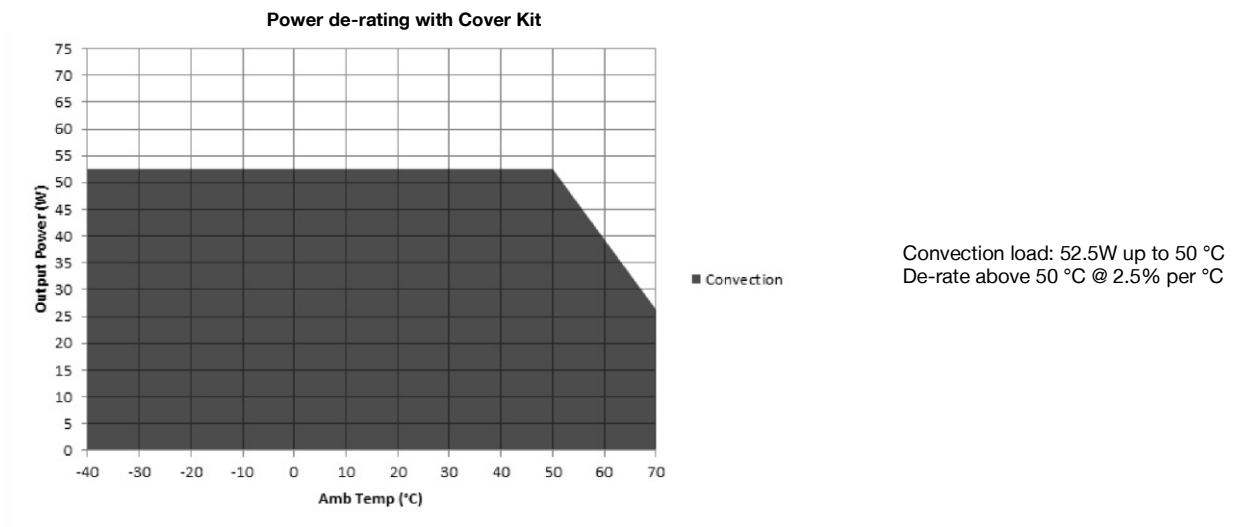


Figure 1. Derating Curves

## 7. CONNECTOR & PIN DESCRIPTION

CONNECTOR	PIN	DESCRIPTION / CONDITION			MANUFACTURER / PN
AC Input Connector	J1	Pin 1	AC Line	Screw Terminal (Option 1)	Molex: 39357-0003 Tyco-2-1776112-3
		Pin 2	Not Fitted		Molex: 1722861103
		Pin 3	AC Neutral	Molex Header (Option 2)	(Mating conn: Molex 1722561003, Molex 1722561103, Molex 1722563103)
DC Output Connector	J2	Pin 1, 2	V1 -VE	Screw Terminal (Option 1)	Molex: 39357-0004 Tyco-2-1776112-4
		Pin 3, 4	V1 +VE	Molex Header (Option 2)	Molex: 1722861104 (Mating conn: Molex 1722561004, Molex 1722561104, Molex 1722563104)

## 8. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	180 g max
Dimensions	76.2 x 50.8 x 25.4 mm (3 x 2 x 1 inch)

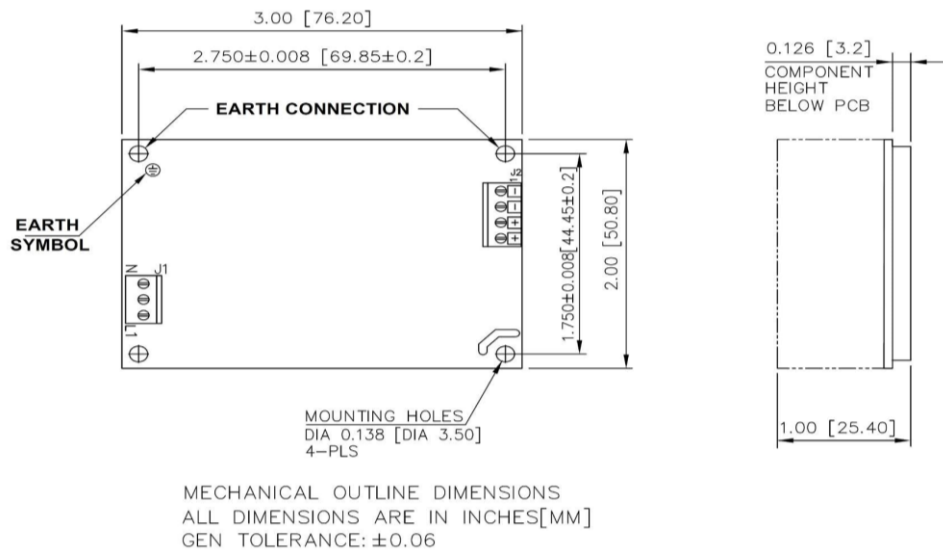


Figure 2. Mechanical Drawing - Screw Terminal (Option 1)


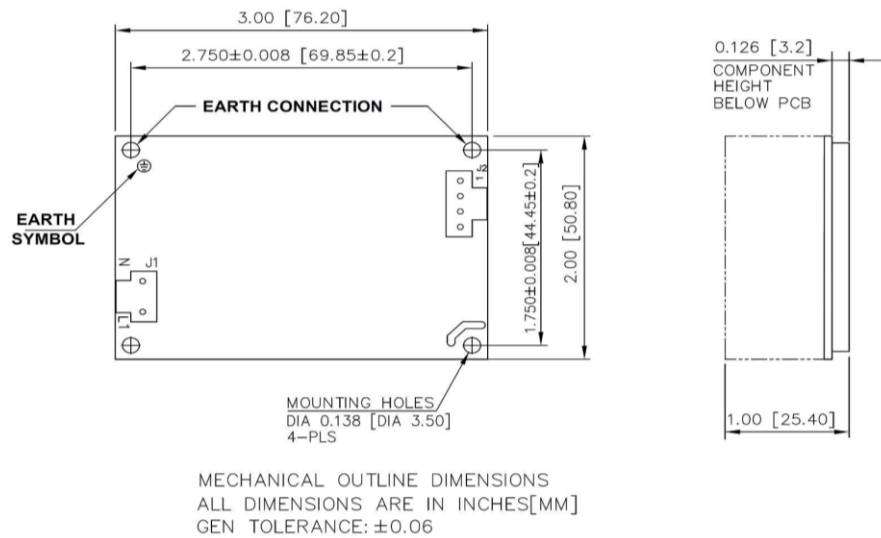


Figure 3. Mechanical Drawing - Molex Header (Option 2)

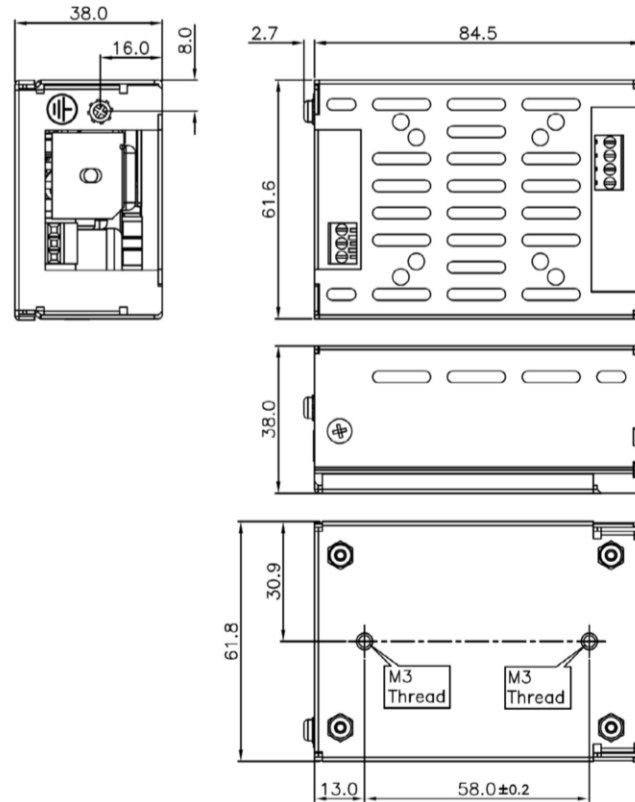

MECHANICAL OUTLINE DIMENSIONS  
ALL DIMENSIONS ARE IN MM  
GEN TOLERANCE:  $\pm 1.0$  MM  
MATERIAL: CRCA/GI 1.0MM THICK  
(POWDER COATING/ PASSIVATION/  
ED COATING BLACK)

Figure 4 - Mechanical Drawing - With Cover Kit

**NOTES:** In case the PCB is mounted in a metal enclosure, using metal hardware ensure the following:

- 1 Stand off, used to mount PCB has OD of 5.4 mm max.
- 2 Screws, used to fix PCB on stand off, have head dia of 6.0 mm max.
- 3 Washer, if used, to have dia of 6.5 mm max.

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[MBC75-1012L-2](#)