

Bundling and Securing

Self-Affixing Cable Ties

TECHNICAL DATA SHEET



Series 6 Solar Tie

Features and Benefits

- HIRHSUV solar fasteners provide excellent durability in UV-, chemical- and moisture-sensitive environments.
- Can be pre-installed while modules are still on the pallet.
- Barrel and offset head design reduce potential for abrasion and wear.
- Design vetted and recommended by First Solar.



Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
Color	Black (BK)
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
UL-File Number + Logo	E64139 [cULus]

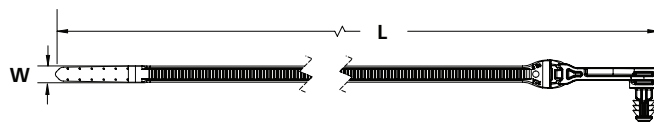

PART NO.	TYPE	Mounting Hole Dia. in. (mm)	Panel Thickness in. (mm)	Offset Length (L2) in. (mm)	Length (L) in. (mm)	Max. Bundle Diameter in. (mm)	Min. Tensile Strength lbs. (N)	Height (H) in. (mm)	Width (W) in. (mm)	Pkg. Qty.
157-00421*	T50ROSFT5.6SQ25R	0.2 (5.6)	0.1 - 0.2 (3.0 - 4.3)	1.0 (25.0)	9.4 (239.0)	2.0 (50.0)	50.0 (225.0)	0.8 (19.3)	0.2 (5.1)	1000

Dimensions are approximate and subject to technical changes. Use Part No. for ordering and Type for specification purposes. *This product meets UL standards.



Contact HellermannTyton for more information.
Visit www.hellermann.tyton.com or call 800.537.1512

Disclaimer: The information in this datasheet is for informational purposes only. Information is subject to change at any time without notice.

HellermannTyton

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HellermannTyton:](#)

[157-00421](#)