

date 10/26/2023 **page** 1 of 5

MODEL: NSIM-8-B | DESCRIPTION: NANO SIM CARD CONNECTOR

FEATURES

- nano SIM card connector
- push in, pull out
- · card detect switch
- gold flash
- surface mount
- UL94V-0






SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated voltage				30	V
rated current			-	0.5	А
contact resistance ¹				100	mΩ
insulation resistance	at 500 Vdc, between adjacent circuits	1,000			МΩ
voltage withstand	for 1 minute, between adjacent circuits		500		Vdc
insertion force	at a rate of 25 mm/min			10	N
withdrawal force	at a rate of 25 mm/min	0.5			N
life		5,000			cycles
operating temperature		-40		75	°C
flammability rating	UL94V-0				
RoHS	yes				

Note: 1. When measured at 20 mV / 100 mA.

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
reel storage	at relative humidity 40~70% reel opened: use within 1 month reel unopened: up to 15 month shelf life	16	22	28	°C
reflow soldering	see reflow profile			250	°C





MECHANICAL DRAWING


units: mm tolerance: X.X ±0.30 mm X.XX ±0.20 mm X.XXX ±0.10 mm unless otherwise specified

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	LCP (UL94V-0)	black
contact terminals	phosphor bronze t=0.10 mm	contact area: gold flash over nickel solder area: gold flash over nickel
cover	SUS304 t=0.12 mm	solder area: gold flash over nickel

date 10/26/2023 | **page** 2 of 5



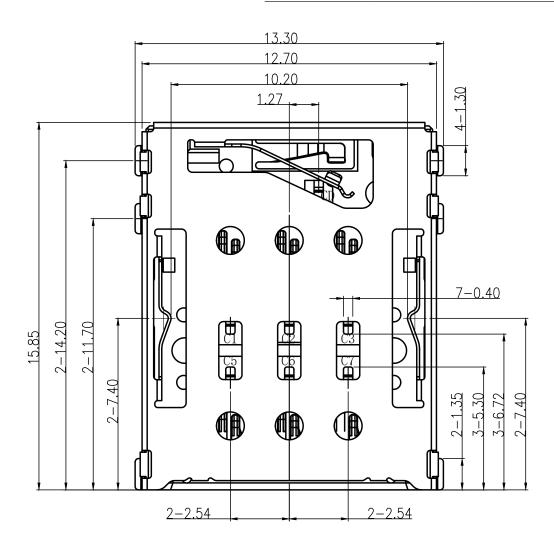

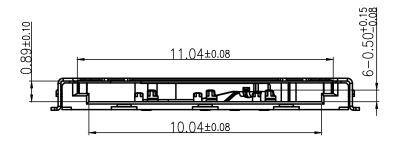


MECHANICAL DRAWING (CONTINUED)

units: mm

PCB tolerance: ±0.05 mm

	PIN CONNECTIONS			
PIN	SIGNAL NAME	DESCRIPTION		
C1	VCC	SUPPLY VOLTAGE		
C2	RST	RESETTING		
С3	CLK	CLOCK		
C5	GND	GROUND CONNECTION		
C6	VPP	PROGRAMMING VOLTAGE		
C7	1/0	DATA LINE		
CD	-	CARD DETECT SWITCH		
GND	-	COVER GROUND		


CARD STATUS			
WITHOUT CARD	CARD INSERTED		
CD GND	CD •••	GND •••	

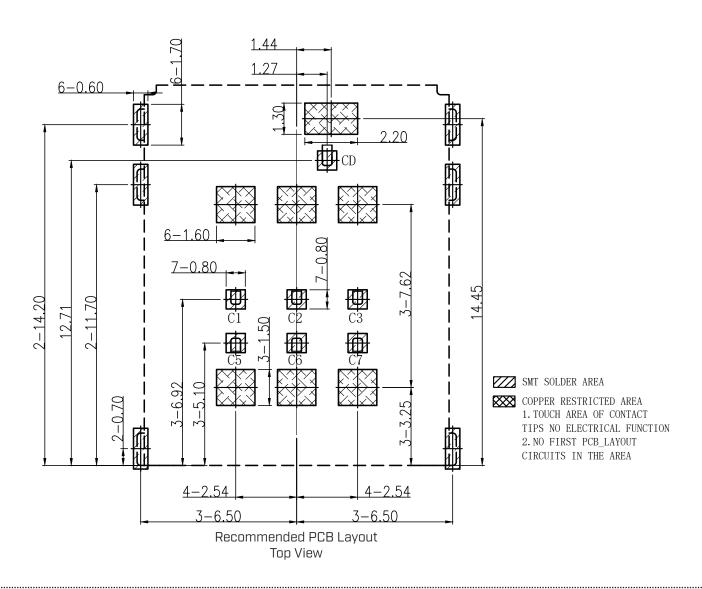

PACKAGING

units: mm

Reel Size: Ø330 mm Reel QTY: 1,500 pcs per reel

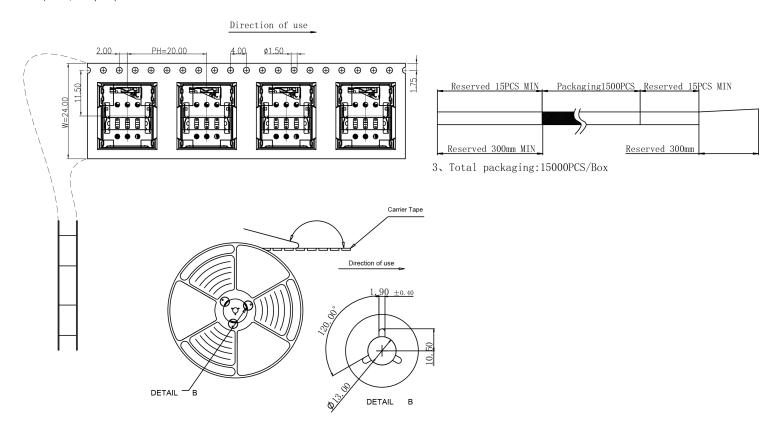

Additional Resources: Product Page | PCB Footprint

CUI DEVICES | MODEL: NSIM-8-B | DESCRIPTION: NANO SIM CARD CONNECTOR

date 10/26/2023 | **page** 5 of 5

REVISION HISTORY

rev.	description	date
1.0	initial release	10/26/2023

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Devices:

NSIM-8-B