


SERIES: PDQ15-D | **DESCRIPTION:** DC-DC CONVERTER**FEATURES**

- up to 15 W isolated output
- industry standard 1" x 1" package
- 4:1 input range
- single/dual regulated output
- over voltage, input under voltage lockout, and short circuit protections
- 1,500 Vdc isolation voltage
- five-sided shielded case
- remote on/off control
- output trim
- -40 to 105°C temperature range
- efficiency up to 88%

**MODEL**

	input voltage		output voltage	output current		output power	ripple & noise ¹	efficiency
	typ (Vdc)	range (Vdc)		min (A)	max (A)	max (W)	max (mVp-p)	typ (%)
PDQ15-Q24-S3-D	24	9~36	3.3	0	4.0	13.2	75	87
PDQ15-Q24-S5-D	24	9~36	5	0	3.0	15	75	87
PDQ15-Q24-S12-D	24	9~36	12	0	1.25	15	100	87
PDQ15-Q24-S15-D	24	9~36	15	0	1.0	15	100	88
PDQ15-Q24-D5-D	24	9~36	±5	0	±1.5	15	75	85
PDQ15-Q24-D12-D	24	9~36	±12	0	±0.625	15	100	87
PDQ15-Q24-D15-D	24	9~36	±15	0	±0.500	15	100	88
PDQ15-Q48-S3-D	48	18~75	3.3	0	4.0	13.2	75	88
PDQ15-Q48-S5-D	48	18~75	5	0	3.0	15	75	88
PDQ15-Q48-S12-D	48	18~75	12	0	1.25	15	100	87
PDQ15-Q48-S15-D	48	18~75	15	0	1.0	15	100	87
PDQ15-Q48-D5-D	48	18~75	±5	0	±1.5	15	75	85
PDQ15-Q48-D12-D	48	18~75	±12	0	±0.625	15	100	87
PDQ15-Q48-D15-D	48	18~75	±15	0	±0.500	15	100	87

Notes: 1. At full load, nominal input, 20 MHz bandwidth oscilloscope, with 10 μ F tantalum and 1 μ F ceramic capacitors on the output.
 2. All specifications are measured at Ta=25°C, nominal input voltage, and rated output load unless otherwise specified.

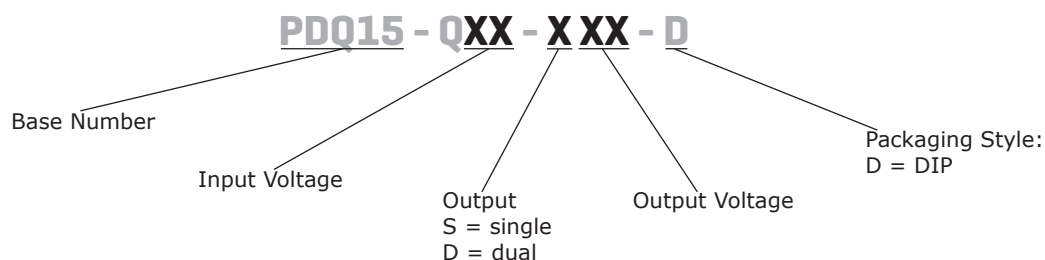PART NUMBER KEY

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	24 Vdc input models	9	24	36	Vdc
	48 Vdc input models	18	48	75	Vdc
surge voltage	for maximum of 100 ms				
	24 Vdc input models			50	Vdc
	48 Vdc input models			100	Vdc
current	24 Vdc input models			2.1	A
	48 Vdc input models			1.0	A
under voltage shutdown	24 Vdc input models, power up		8.8		Vdc
	24 Vdc input models, power down		8.0		Vdc
	48 Vdc input models, power up		17		Vdc
	48 Vdc input models, power down		16		Vdc
remote on/off ¹	turn on (3.5~75 Vdc or open circuit)				
	turn off (<1.2 Vdc)				
filter	LC type				
input reverse polarity protection	no				
input fuse	4 A time delay fuse for 24 Vdc input models				
	(recommended)				
	2 A time delay fuse for 48 Vdc input models				
	(recommended)				

Notes: 1. CMOS or open collector TTL, reference to -Vin.

OUTPUT

parameter	conditions/description	min	typ	max	units
maximum capacitive load	3.3 Vdc output models			4,000	μF
	5 Vdc output models			3,000	μF
	12 Vdc output models			1,250	μF
	15 Vdc output models			1,000	μF
	±5 Vdc output models			1,500	μF
	±12 Vdc output models			625	μF
	±15 Vdc output models			470	μF
voltage accuracy				±1.5	%
line regulation	from high line to low line				
	single output models			±0.2	%
	dual output models			±0.5	%
load regulation	from 100% load to minimum load				
	single output models			±0.2	%
	dual output models			±1.0	%
voltage balance	dual output models			±2.0	%
cross regulation	load cross variation 10%/100% (dual output models)			±5	%
turn-on delay time, from input	from Vin, min to 10% Vo		10		ms
turn-on delay time, from on/off control	from Von/off to 10% Vo		10		ms
rise time	from 10% Vo to 90% Vo		10		ms
adjustability ²	see application notes		±10		%
switching frequency			400		kHz
dynamic load response	75%-100% step load change				
	error band (Vout)		5		%
	recovery time		250		μs
temperature coefficient			±0.03		%/°C

Note: 2. For single output models only.

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over voltage protection	zener or TVS clamp				
	3.3 Vdc output models		3.9		Vdc
	5 Vdc output models (single and dual)		6.2		Vdc
	12 Vdc output models (single and dual)		15		Vdc
	15 Vdc output models (single and dual)		18		Vdc
over current protection	hiccup mode	110	140	160	%
short circuit protection	continuous, automatic recovery				

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute	1,500			Vdc
isolation resistance	input to output	1,000			MΩ
isolation capacitance	input to output		1,000		pF
conducted emissions	EN 55022 Class A (external circuit required, see Figure 3)				
MTBF	as per MIL-HDBK-217F, GB, full load, 25°C				
	3.3, 5 Vdc output models		950,000		hours
	all other models		1,300,000		hours
RoHS	2011/65/EU				

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature	see derating curves	-40		105	°C
storage temperature		-55		125	°C
operating humidity	non-condensing			95	%

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	see wave soldering profile			260	°C

- Notes:
1. Soldering materials: Sn/Cu/Ni
 2. Ramp up rate during preheat: 1.4°C/s (from 50°C to 100°C)
 3. Soaking temperature: 0.5°C/s (from 100°C to 130°C), 60±20 seconds
 4. Peak temperature: 260°C, above 250°C for 3~6 seconds
 5. Ramp down rate during cooling: -10°C/s (from 260°C to 150°C)



WAVE SOLDERING PROFILE

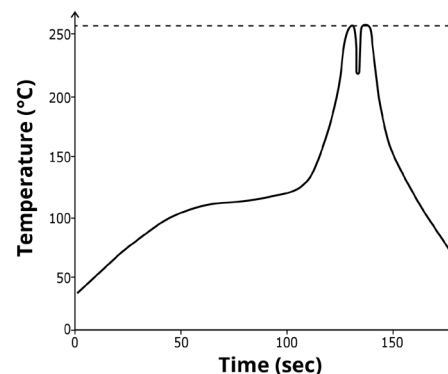

parameter	conditions/description	min	typ	max	units
dimensions	1.00 x 1.00 x 0.4 [25.4 x 25.4 x 10.2 mm]				inches
case material	black coated copper with non-conductive base				
weight			18		g

units: inches [mm]
tolerance: X.XX ± 0.02 [± 0.5]
 X.XXX ± 0.010 [± 0.25]
pin diameter tolerance: ± 0.004 [± 0.1]


PIN CONNECTIONS		
PIN	Function	
	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote	Remote

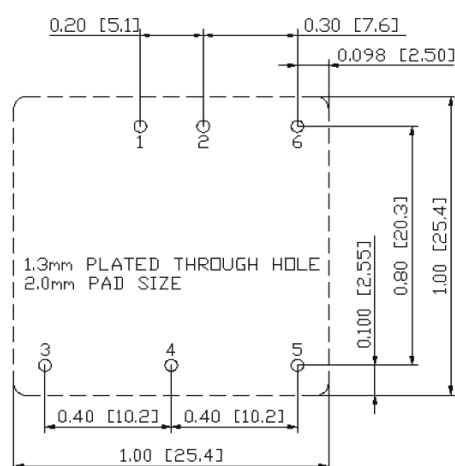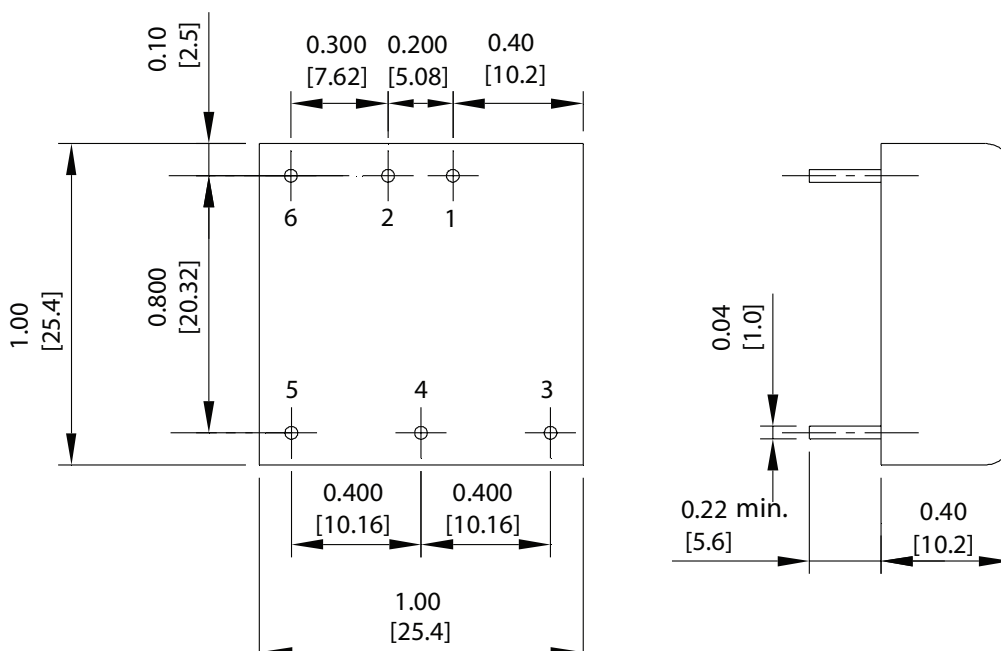

Recommended PCB Layout Top View


DERATING CURVE

TEMPERATURE DERATING CURVE

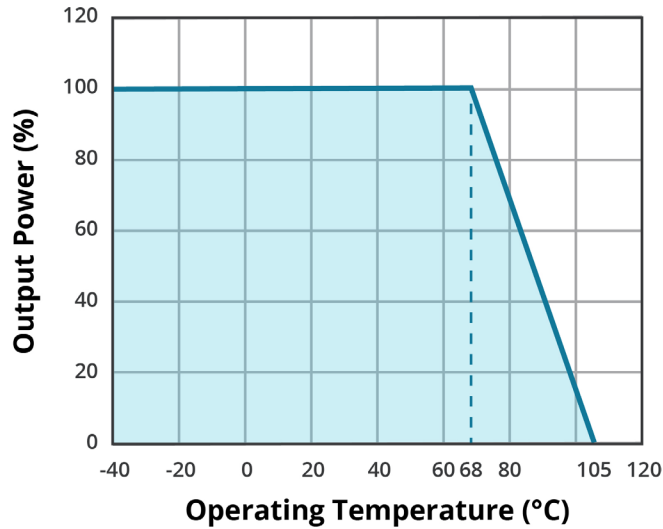

EFFICIENCY CURVES


EFFICIENCY VS OUTPUT LOAD PDQ15-Q24-S3-D

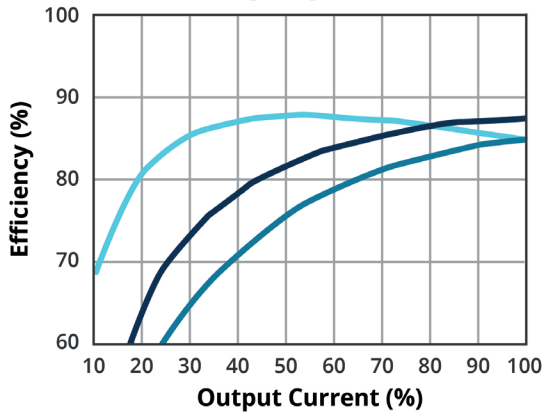

Key

9 Vdc
24 Vdc
36 Vdc


EFFICIENCY VS OUTPUT LOAD PDQ15-Q24-S12-D

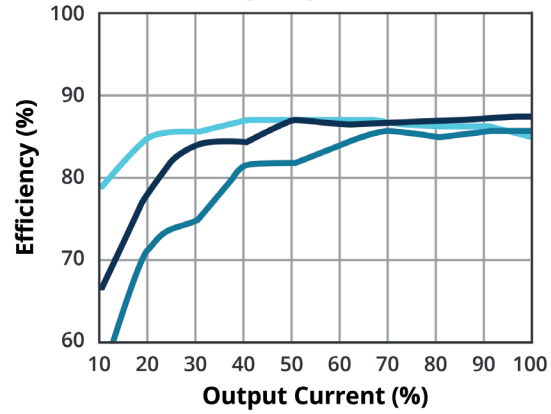

Key

9 Vdc
24 Vdc
36 Vdc


EFFICIENCY VS OUTPUT LOAD PDQ15-Q24-S15-D

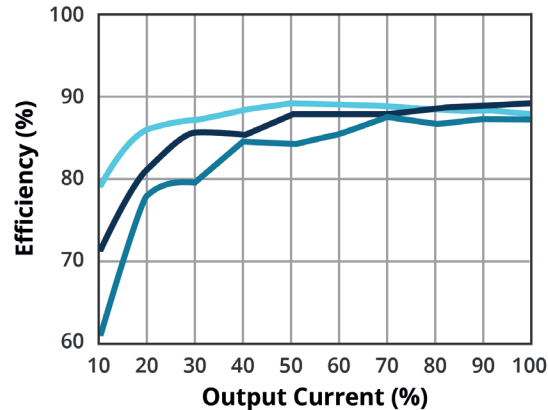

Key

9 Vdc
24 Vdc
36 Vdc

EFFICIENCY VS OUTPUT LOAD PDQ15-Q24-D5-D

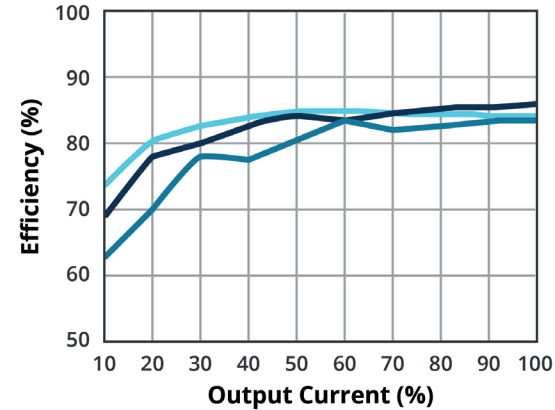


Key


9 Vdc
24 Vdc
36 Vdc

EFFICIENCY CURVES (CONTINUED)


EFFICIENCY VS OUTPUT LOAD
PDQ15-Q24-D15-D

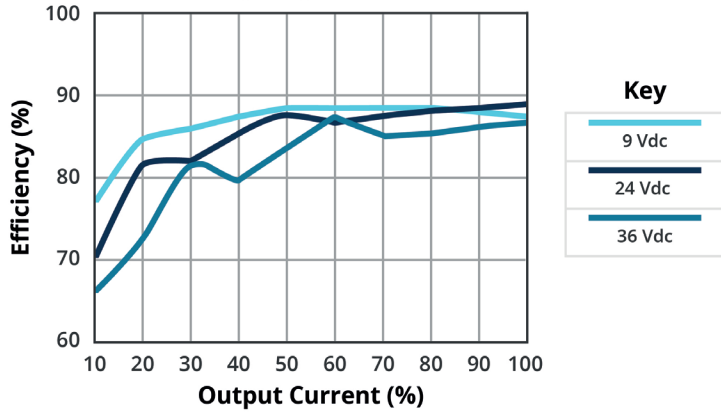


EFFICIENCY VS OUTPUT LOAD
PDQ15-Q48-S3-D

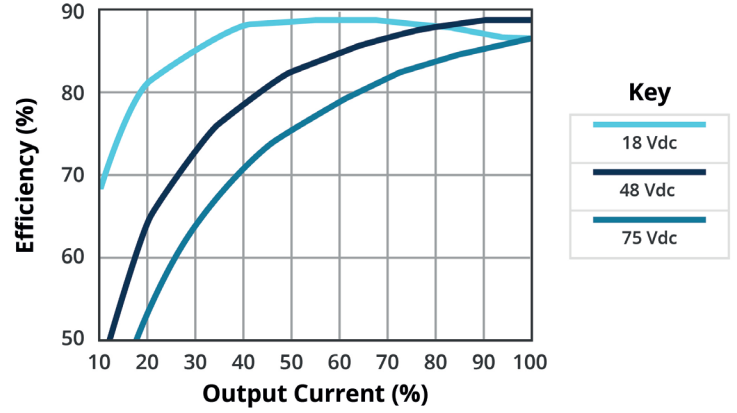


EFFICIENCY VS OUTPUT LOAD
PDQ15-Q48-S12-D

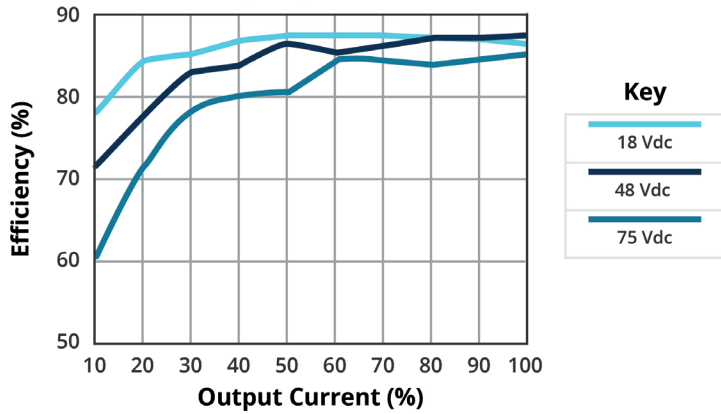


EFFICIENCY VS OUTPUT LOAD
PDQ15-Q48-S15-D

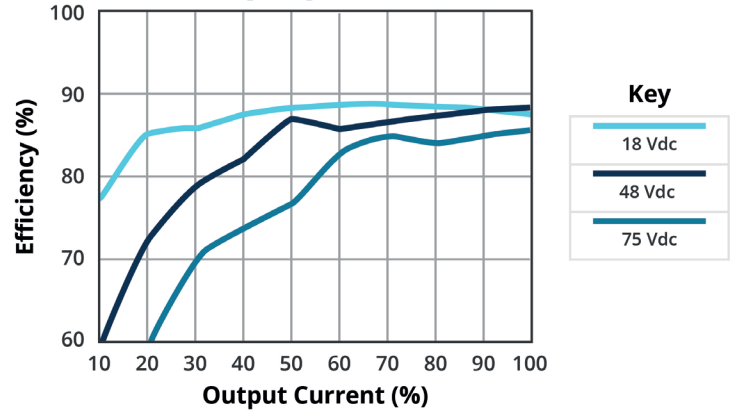

EFFICIENCY VS OUTPUT LOAD
PDQ15-Q48-D5-D

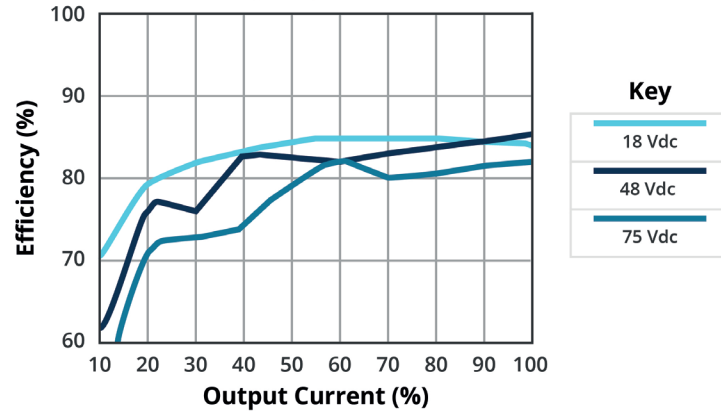

EFFICIENCY VS OUTPUT LOAD
PDQ15-Q48-D15-D

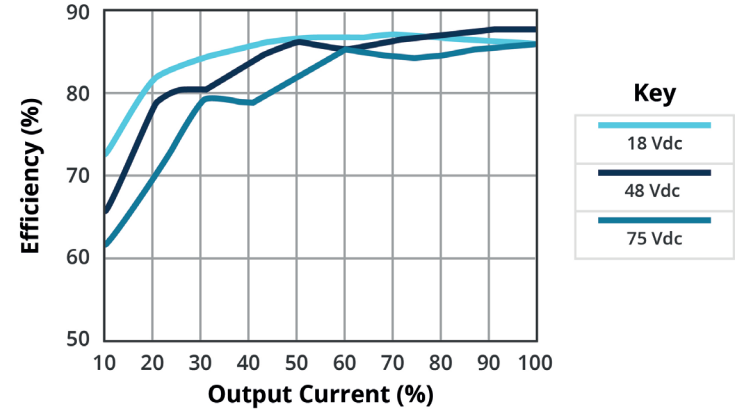

TEST CONFIGURATIONS

Input Ripple Current & Output Noise

Figure 1 Measuring Input Ripple Current

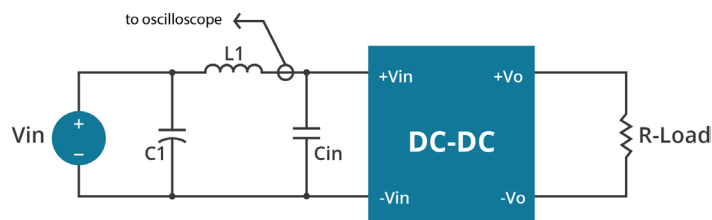


Figure 2 Measuring Output Ripple And Noise

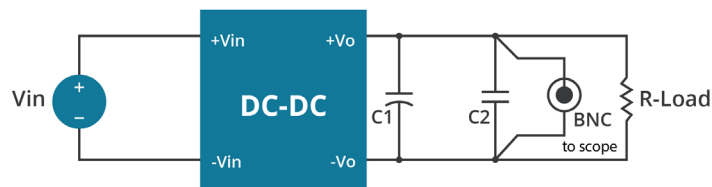


Table 1

L1	12 μ H
C1	none
Cin	33 μ F ESR < 0.7 Ω at 100 kHz

Table 2

C1	10 μ F tantalum capacitor
C2	1 μ F ceramic capacitor

EMC RECOMMENDED CIRCUIT

Test Condition

Input Voltage: Nominal

Output Load: Full Load

Figure 3 Conducted Emissions Test Circuit

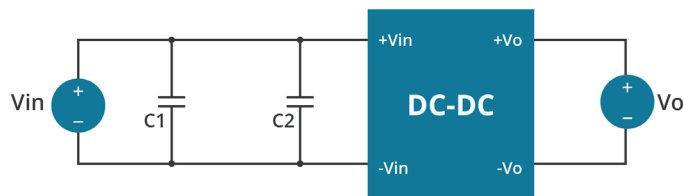


Table 3

EN55022 Class A Recommended External Circuit Components		
Input Voltage (Vdc)	C1	C2
24	6.8 μ F / 50 V	6.8 μ F / 50 V
48	2.2 μ F / 100 V	2.2 μ F / 100 V

APPLICATION NOTES

Output Voltage Trimming

The output voltage can be adjusted (single outputs only) by using the trim pin and the use of either an external trim pot or the use of a single fixed resistor (see Figures below). If the trim function is not needed, leave the trim pin open.

Figure 4 Trim Adjustments Using A Trimpot

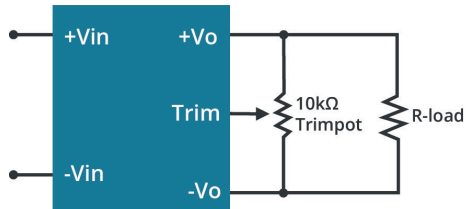


Figure 5 Trim Adjustments To Increase Output Voltage Using A Fixed Resistor


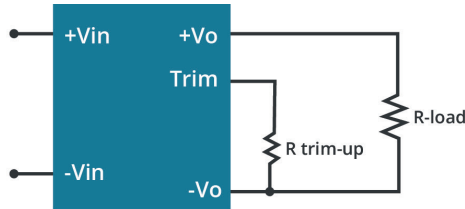


Figure 6 Trim Adjustments To Decrease Output Voltage Using A Fixed Resistor

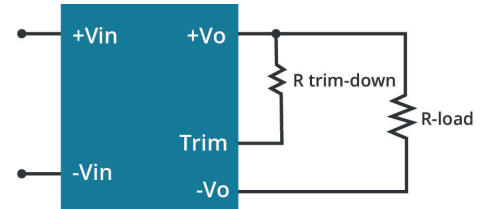

Formula for Trim Resistor

$$R_{trim-up} = \left(\frac{V_r \times R1 \times (R2 + R3)}{(V_o - V_{o,nom}) \times R2} \right) - R_t \quad (\text{k}\Omega)$$

$$R_{trim-down} = R1 \times \left(\frac{V_r \times R1}{(V_{o,nom} - V_o) \times R2} - 1 \right) - R_t \quad (\text{k}\Omega)$$

Note: $R_{trim-up}$ is the external resistor in kΩ
 $R_{trim-down}$ is the external resistor in kΩ
 $V_{o,nom}$ is the nominal output voltage
 V_o is the desired output voltage
 $R1, R2, R3, R_t$, and V_r are internal (see Table 4)

Table 4

Output Voltage (Vdc)	R1 (kΩ)	R2 (kΩ)	R3 (kΩ)	Rt (kΩ)	Vr (V)
3.3	2.74	1.8	0.27	9.1	1.24
5	2.32	2.32	0	8.2	2.5
12	6.8	2.4	2.32	22	2.5
15	8.06	2.4	3.9	27	2.5

REVISION HISTORY

rev.	description	date
1.0	initial release	07/12/2016
1.01	derating curve and circuit figures updated	03/15/2022
1.02	company address updated	11/05/2024

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters

15575 SW Sequoia Pkwy #100
Portland, OR 97224
800.275.4899

Fax 503.612.2383

cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CUI Inc.:](#)

[PDQ15-Q48-D5-D](#) [PDQ15-Q24-D15-D](#) [PDQ15-Q48-S5-D](#) [PDQ15-Q48-D12-D](#) [PDQ15-Q48-D15-D](#) [PDQ15-Q24-D12-D](#) [PDQ15-Q24-D5-D](#) [PDQ15-Q48-S15-D](#) [PDQ15-Q24-S15-D](#) [PDQ15-Q24-S3-D](#) [PDQ15-Q24-S5-D](#) [PDQ15-Q48-S12-D](#) [PDQ15-Q48-S3-D](#) [PDQ15-Q24-S12-D](#)