Additional Resources: Product Page | 3D Model | PCB Footprint

# **CUI** DEVICES

**date** 07/30/2020

page 1 of 3

MODEL: SJ-63033A | DESCRIPTION: AUDIO JACK

#### **FEATURES**

- through hole
- right angle
- 3 conductor
- threaded with nut





### **SPECIFICATIONS**

parameter	conditions/description	min	typ	max	units
rated input voltage			12		Vdc
rated input current				1	Α
contact resistance between terminal and mating plug				30	mΩ
insulation resistance	at 500 Vdc	100			МΩ
voltage withstand	for 1 minute			500	Vac
insertion/withdrawal force		0.4		3	kg
operating temperature		-25		70	°C
life			5,000		cycles
flammability rating	see material table				
RoHS	ves				


### **SOLDERABILITY**

parameter	conditions/description	min	typ	max	units
hand soldering	for 3~5 seconds		360		°C

## **MECHANICAL DRAWING**

units: mm tolerance: ±0.3 mm

ITEM	DESCRIPTION	MATERIAL	PLATING/COLOR
1	earth terminal	phosphor bronze	silver
2	tip spring	phosphor bronze	silver
3	ring spring	phosphor bronze	silver
4	housing	PBT (UL94V-0)	black
5	cover	PC (UL94V-2)	transparent
6	nut	steel	nickel
7	washer	steel	nickel

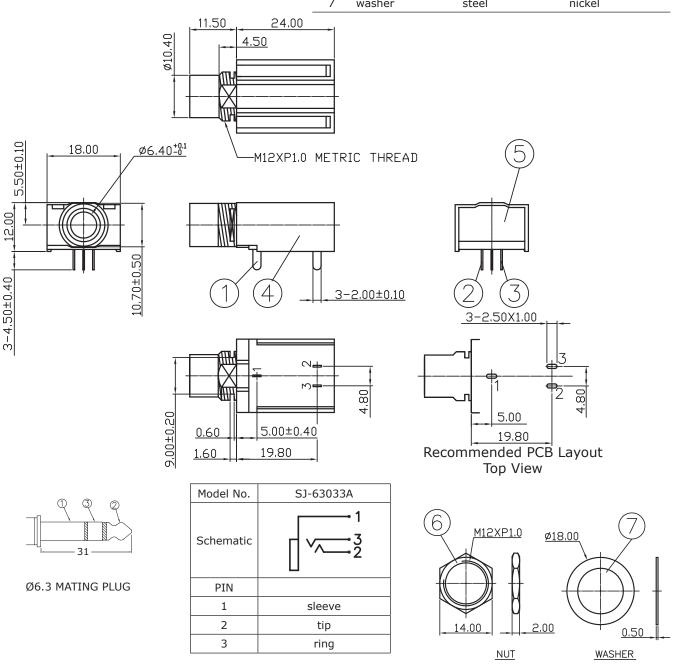

Additional Resources: Product Page | 3D Model | PCB Footprint

CUI Devices | MODEL: SJ-63033A | DESCRIPTION: AUDIO JACK date 07/30/2020 | page 3 of 3

#### **REVISION HISTORY**

rev.	description	date
1.0	initial release	07/30/2020

The revision history provided is for informational purposes only and is believed to be accurate.

# **CUI** DEVICES

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Devices: SJ-63033A