


## Data Sheet

**HSME-C110/C120/C150/C170/C177/C190/  
C191/C197/C265**

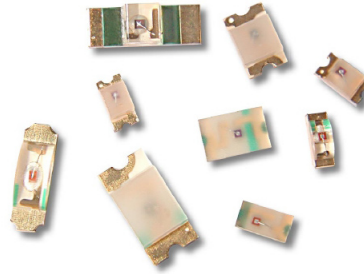

### Description

This chip-type LED utilizes Aluminum Indium Gallium Phosphide (AlInGaP) material technology. The AlInGaP material has a very high luminous efficiency, capable of producing high light output.

These chipLEDs come in top mounting, top emitting packages (HSMx-C150/170/177/190/191/197), top mounting, side emitting packages (HSMx-C110/120) or reverse mounting, top emitting package (HSMx-C265).

All packages are binned by both color and intensity.

In order to facilitate pick and place operation, these chipLEDs are shipped in Tape & Reel, with 4000 units per reel for HSMx-C120/170/177/190/191/197 and 3000 units per reel for HSMx-C110/C150/265.

These packages are compatible with reflow soldering process.

### Features




- Small size
- Industry standard footprint
- Operating temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Compatible with IR soldering
- Available in 8 mm tape on 7" diameter reel
- Reel sealed in zip-locked moisture barrier bags

### Applications




- Membrane switch indicator
- LCD backlighting
- Pushbutton backlighting
- Front panel indicator
- Symbol backlighting
- Keypad backlighting

**CAUTION:** HSME-Cxxx LEDs are Class 1A ESD sensitive per JESD22-A114C.01. Please observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.




## Package Dimensions

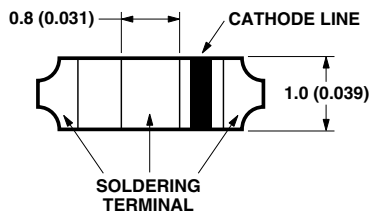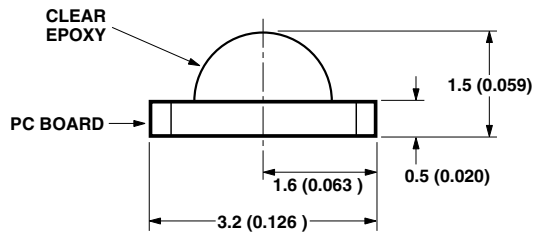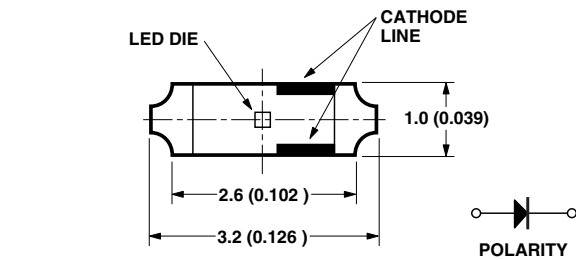




HSMx-C110

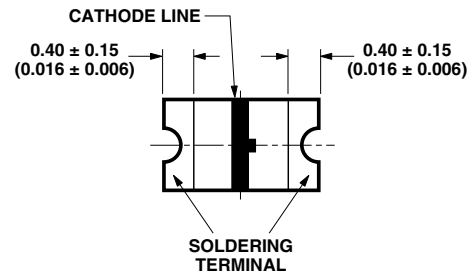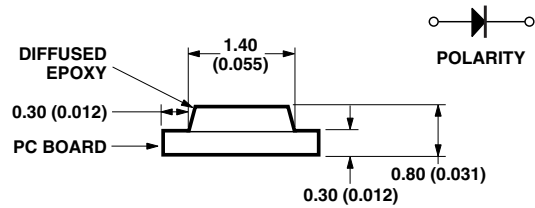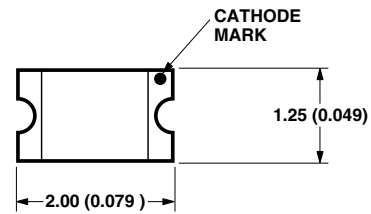

HSMx-C170

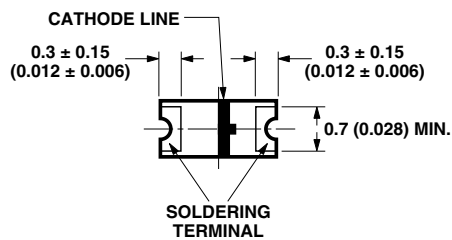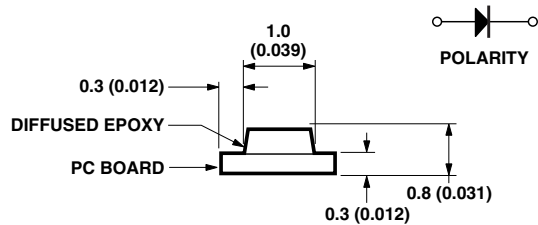

HSMx-C190


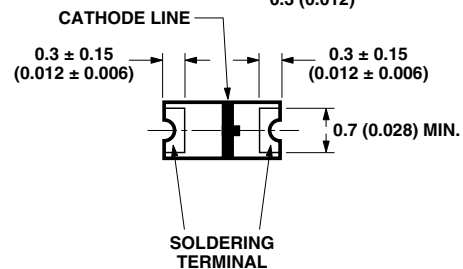
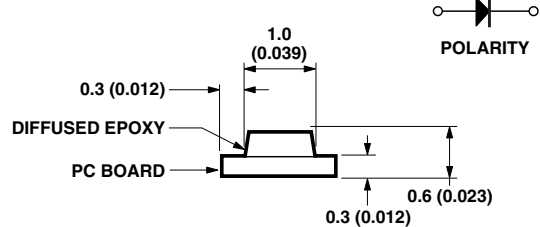



HSMx-C191

### Notes:

1. All dimensions in millimeters (inches).
2. Tolerance is  $\pm 0.1$  mm ( $\pm 0.004$  in.) unless otherwise specified.




## Package Dimensions, continued

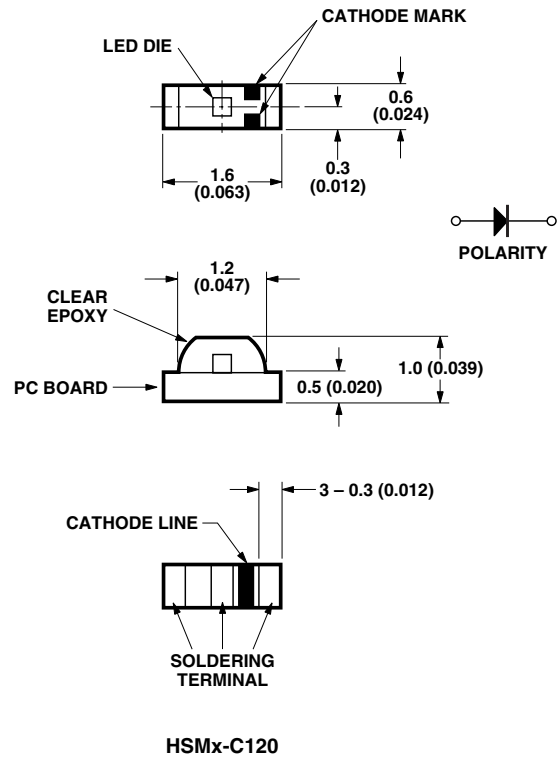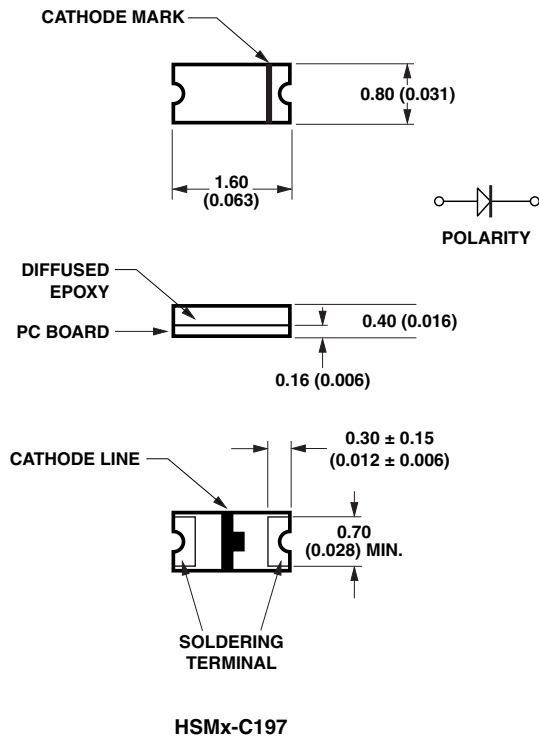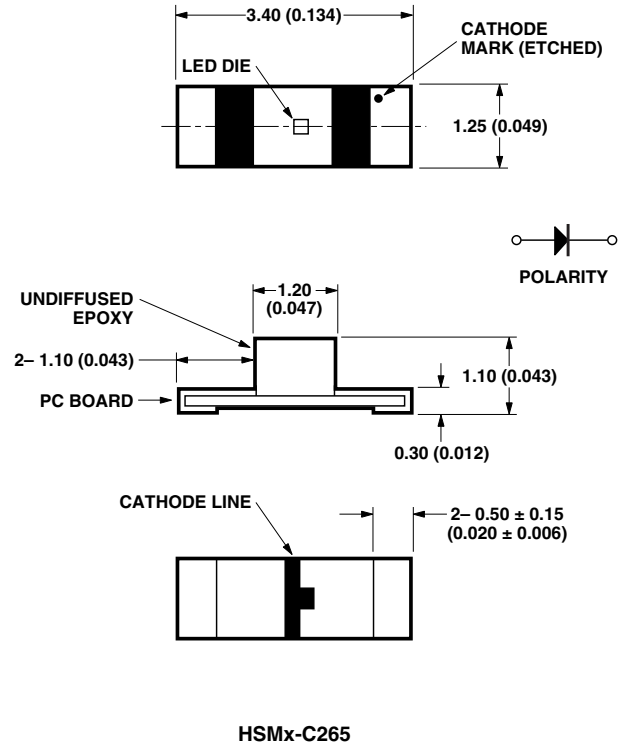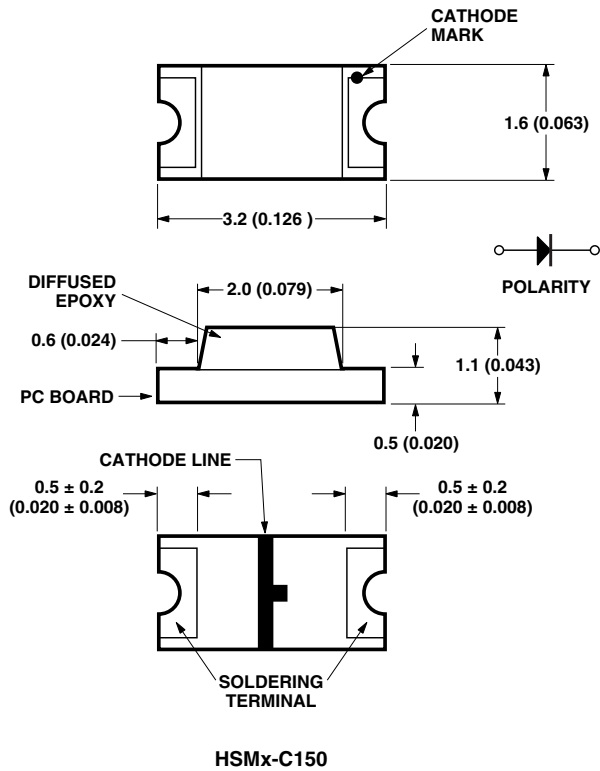

### Notes:

1. All dimensions in millimeters (inches).
2. Tolerance is ± 0.1 mm (± 0.004 in.) unless otherwise specified.

## Package Dimensions, continued

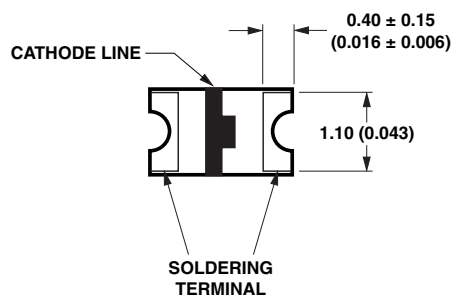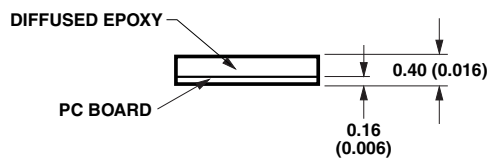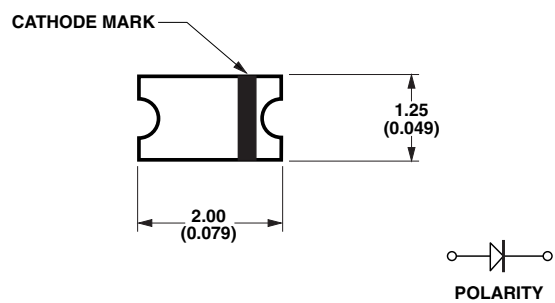

### HSMx-C177

#### Notes:

1. All dimensions in millimeters (inches).
2. Tolerance is  $\pm 0.1$  mm ( $\pm 0.004$  In.) unless otherwise specified.

## Device Selection Guide

| Package Dimension (mm) <sup>[1,2]</sup> | AlInGaP Green | Package Description    |
|-----------------------------------------|---------------|------------------------|
| 1.6 (L) x 0.8 (W) x 0.6 (H)             | HSME-C191     | Untinted, Diffused     |
| 1.6 (L) x 0.8 (W) x 0.4 (H)             | HSME-C197     | Untinted, Diffused     |
| 1.6 (L) x 0.8 (W) x 0.8 (H)             | HSME-C190     | Untinted, Diffused     |
| 2.0 (L) x 1.25 (W) x 0.8 (H)            | HSME-C170     | Untinted, Diffused     |
| 2.0 (L) x 1.25 (W) x 0.4 (H)            | HSME-C177     | Untinted, Diffused     |
| 1.6 (L) x 1.0 (W) x 0.6 (H)             | HSME-C120     | Untinted, Non-diffused |
| 3.2 (L) x 1.5 (W) x 1.0 (H)             | HSME-C110     | Untinted, Non-diffused |
| 3.2 (L) x 1.6 (W) x 1.1 (H)             | HSME-C150     | Untinted, Diffused     |
| 3.4 (L) x 1.25 (W) x 1.1 (H)            | HSME-C265     | Untinted, Non-diffused |

Notes:

1. Dimensions in mm.
2. Tolerance  $\pm 0.1$  mm unless otherwise noted.

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter                                   | HSME-C110/120/170/177/<br>190/191/197/150/265 | Units            |
|---------------------------------------------|-----------------------------------------------|------------------|
| DC Forward Current <sup>[1,2]</sup>         | 20                                            | mA               |
| Power Dissipation                           | 52                                            | mW               |
| Reverse Voltage ( $I_R = 100 \mu\text{A}$ ) | 5                                             | V                |
| LED Junction Temperature                    | 95                                            | $^\circ\text{C}$ |
| Operating Temperature Range                 | -40 to +85                                    | $^\circ\text{C}$ |
| Storage Temperature Range                   | -40 to +85                                    | $^\circ\text{C}$ |
| Soldering Temperature                       | See reflow soldering profile (Figures 6 & 7)  |                  |

Notes:

1. Derate linearly as shown in Figure 4.
2. Drive current above 5 mA is recommended for best long term performance.

## Electrical Characteristics at $T_A = 25^\circ\text{C}$

| Part Number                   | Forward Voltage<br>$V_F$ (Volts)<br>@ $I_F = 20 \text{ mA}$ |      | Reverse Breakdown<br>$V_R$ (Volts)<br>@ $I_R = 100 \mu\text{A}$ | Capacitance C<br>(pF), $V_F = 0$ ,<br>$f = 1 \text{ MHz}$ | Thermal<br>Resistance<br>$R\theta_{J-PIN}$ ( $^\circ\text{C/W}$ ) |
|-------------------------------|-------------------------------------------------------------|------|-----------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------|
|                               | Typ.                                                        | Max. | Min.                                                            | Typ.                                                      | Typ.                                                              |
| HSME-C110/120                 | 2.1                                                         | 2.6  | 5                                                               | 18                                                        | 550                                                               |
| HSME-C150/170/177/190/191/197 | 2.1                                                         | 2.6  | 5                                                               | 15                                                        | 450                                                               |
| HSME-C265                     | 2.1                                                         | 2.6  | 5                                                               | 16                                                        | 450                                                               |

## Optical Characteristics at T<sub>A</sub> = 25°C

| Part Number              | Luminous Intensity<br>I <sub>v</sub> (mcd) @ 20 mA <sup>[1]</sup> |      | Peak Wavelength<br>λ <sub>peak</sub> (nm) | Color, Dominant<br>Wavelength<br>λ <sub>d</sub> <sup>[2]</sup> (nm) | Viewing Angle<br>2θ <sub>1/2</sub> Degrees <sup>[3]</sup> | Luminous Efficacy<br>η <sub>v</sub> (lm/w) |
|--------------------------|-------------------------------------------------------------------|------|-------------------------------------------|---------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------|
|                          | Min.                                                              | Typ. | Typ.                                      | Typ.                                                                | Typ.                                                      | Typ.                                       |
| HSME-C110                | 18                                                                | 52   | 570                                       | 572                                                                 | 130                                                       | 570                                        |
| HSME-C120                | 18                                                                | 52   | 570                                       | 572                                                                 | 155                                                       | 570                                        |
| HSME-150/170/<br>190/191 | 18                                                                | 50   | 570                                       | 572                                                                 | 170                                                       | 570                                        |
| HSME-C177/197            | 18                                                                | 50   | 570                                       | 572                                                                 | 130                                                       | 570                                        |
| HSME-C265                | 18                                                                | 50   | 570                                       | 572                                                                 | 150                                                       | 570                                        |

Notes:

1. The luminous intensity, I<sub>v</sub>, is measured at the peak of the spatial radiation pattern, which may not be aligned with the mechanical axis of the lamp package.
2. The dominant wavelength, λ<sub>d</sub>, is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
3. θ<sub>1/2</sub> is the off-axis angle where the luminous intensity is 1/2 the peak intensity.

## Green Color Bin Limits<sup>[1]</sup>

| Bin ID | Dom. Wavelength (nm) |       |
|--------|----------------------|-------|
|        | Min.                 | Max.  |
| A      | 561.5                | 564.5 |
| B      | 564.5                | 567.5 |
| C      | 567.5                | 570.5 |
| D      | 570.5                | 573.5 |
| E      | 573.5                | 576.5 |

Tolerance: ± 1 nm

## Light Intensity (I<sub>v</sub>) Bin Limits<sup>[1]</sup>

| Bin ID | Intensity (mcd) |        |
|--------|-----------------|--------|
|        | Min.            | Max.   |
| A      | 0.11            | 0.18   |
| B      | 0.18            | 0.29   |
| C      | 0.29            | 0.45   |
| D      | 0.45            | 0.72   |
| E      | 0.72            | 1.10   |
| F      | 1.10            | 1.80   |
| G      | 1.80            | 2.80   |
| H      | 2.80            | 4.50   |
| J      | 4.50            | 7.20   |
| K      | 7.20            | 11.20  |
| L      | 11.20           | 18.00  |
| M      | 18.00           | 28.50  |
| N      | 28.50           | 45.00  |
| P      | 45.00           | 71.50  |
| Q      | 71.50           | 112.50 |
| R      | 112.50          | 180.00 |
| S      | 180.00          | 285.00 |
| T      | 285.00          | 450.00 |
| U      | 450.00          | 715.00 |

Tolerance: ± 15%

Notes:

1. Bin categories are established for classification of products. Products may not be available in all categories. Please contact your Avago representative for information on currently available bins.
2. The I<sub>v</sub> binning specification set-up is for lowest allowable I<sub>v</sub> binning only. There are no upper I<sub>v</sub> bin limits.

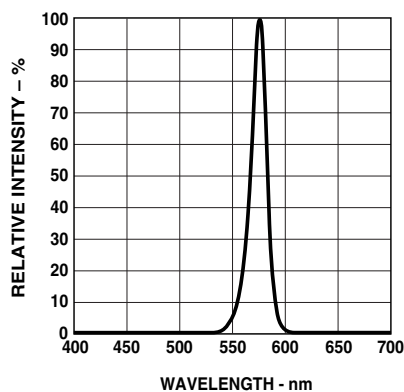


Figure 1. Relative intensity vs. wavelength.

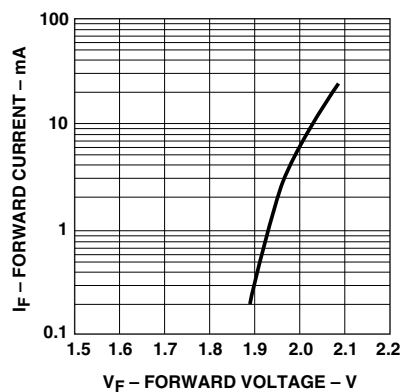


Figure 2. Forward current vs. forward voltage.

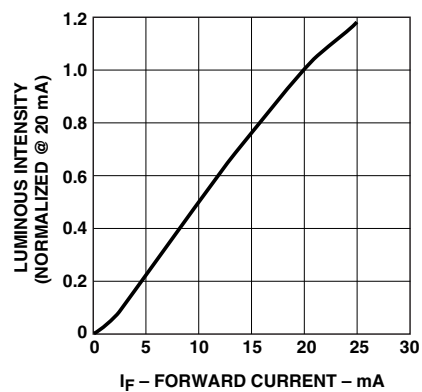


Figure 3. Luminous intensity vs. forward current.

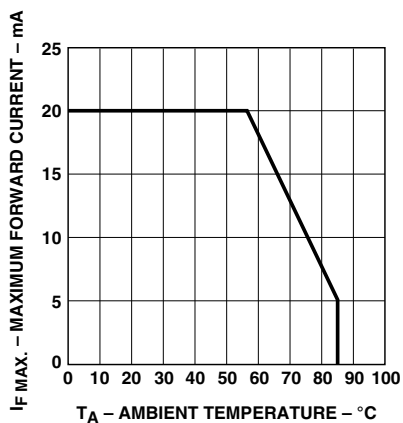


Figure 4. Maximum forward current vs. ambient temperature.

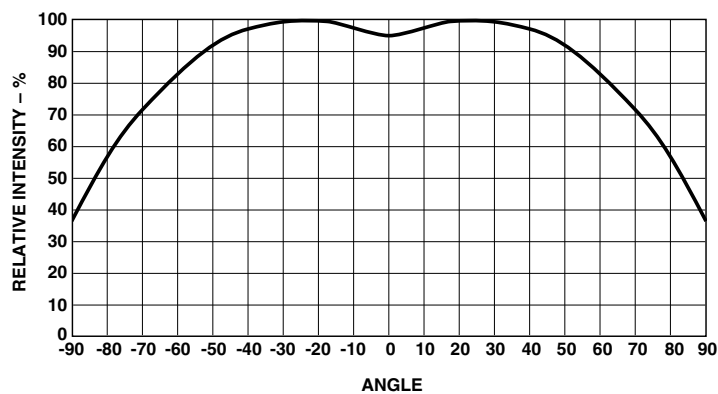


Figure 5a. Relative intensity vs. angle for HSMx-C170, HSMx-C190, HSMx-C191, and HSMx-C150.

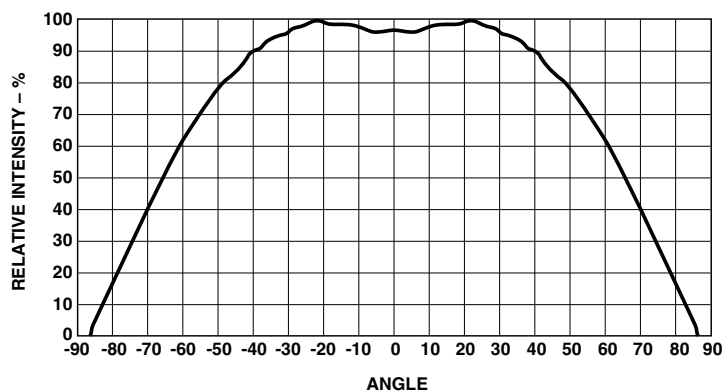


Figure 5b. Relative intensity vs. angle for HSMx-C177 and HSMx-C197.

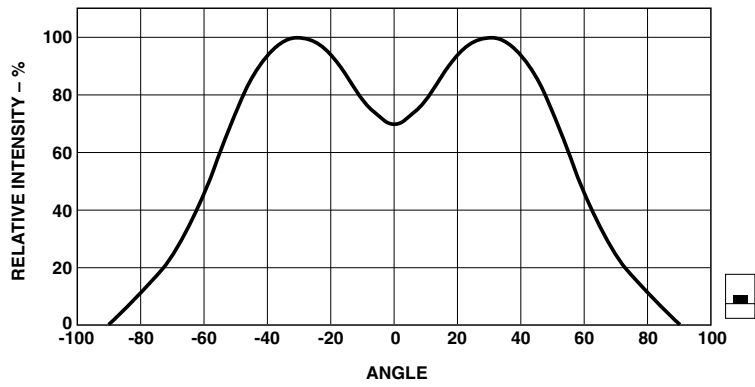
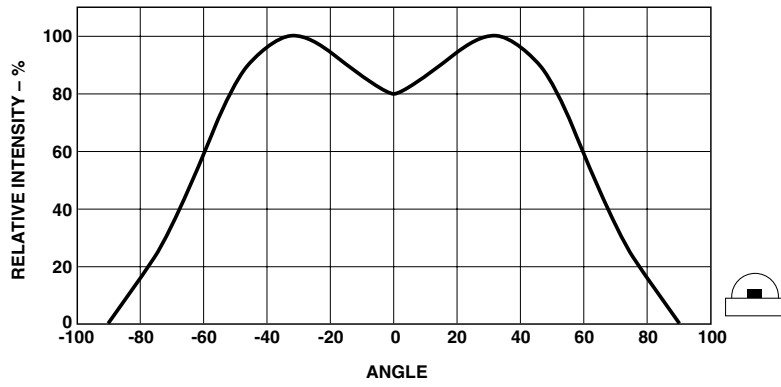


Figure 5c. Relative intensity vs. angle for HSMx-C110.

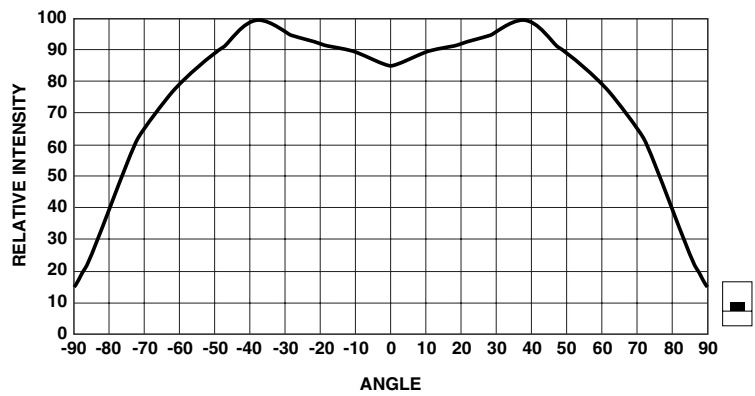
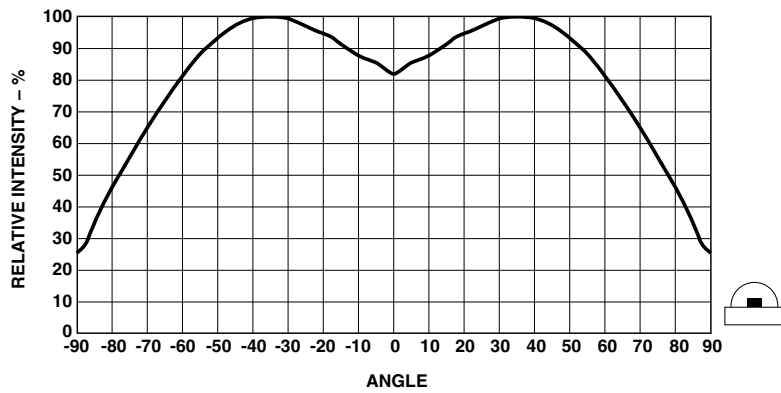


Figure 5d. Relative intensity vs. angle for HSMx-C120.



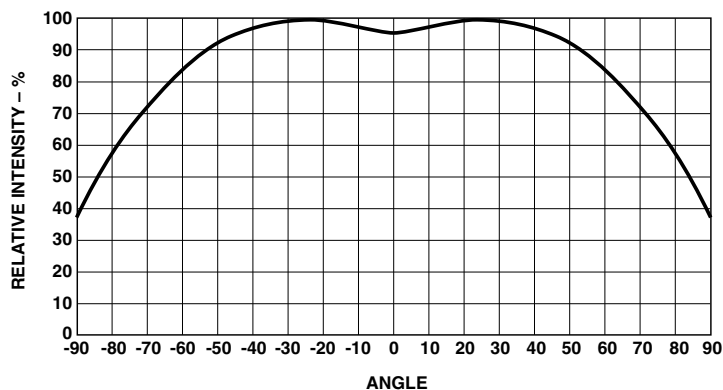


Figure 5e. Relative intensity vs. angle for HSMx-C265.

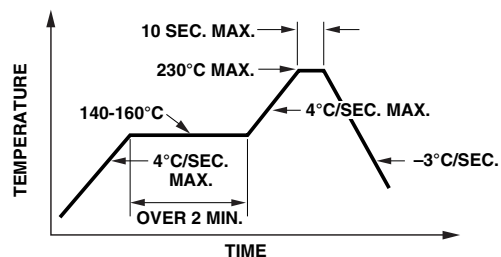


Figure 6. Recommended reflow soldering profile.

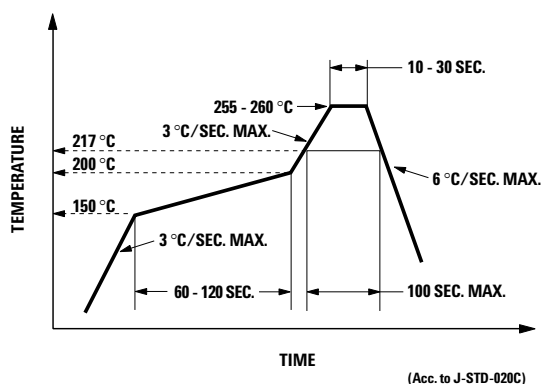


Figure 7. Recommended Pb-free reflow soldering profile.

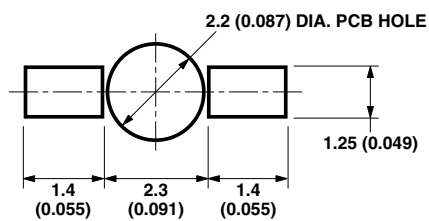


Figure 8. Recommended soldering pattern for HSMx-C265.

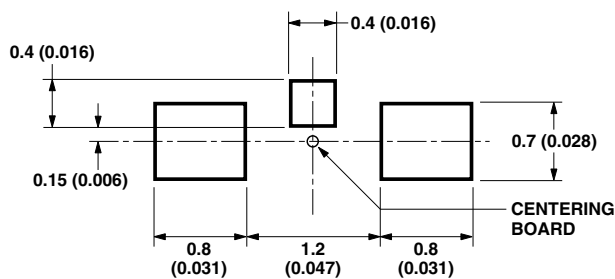


Figure 9. Recommended soldering pattern for HSMx-C120.

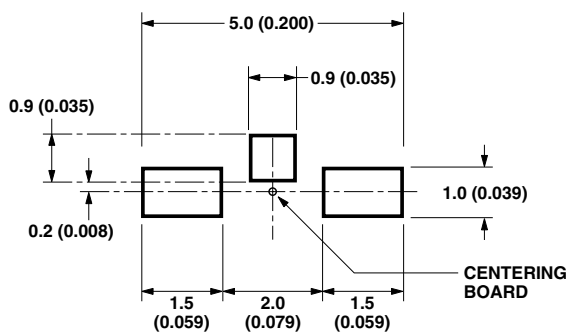


Figure 10. Recommended soldering pattern for HSMx-C110.




Figure 11. Recommended soldering pattern for HSMx-C170 and HSMx-C177.




Figure 12. Recommended soldering pattern for HSMx-C190, HSMx-C191 and HSMx-C197.

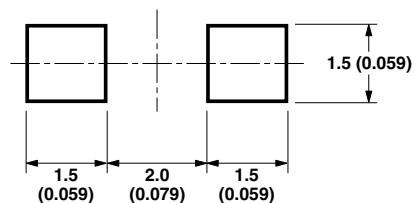


Figure 13. Recommended soldering pattern for HSMx-C150.

Note:

1. All dimensions in millimeters (inches).

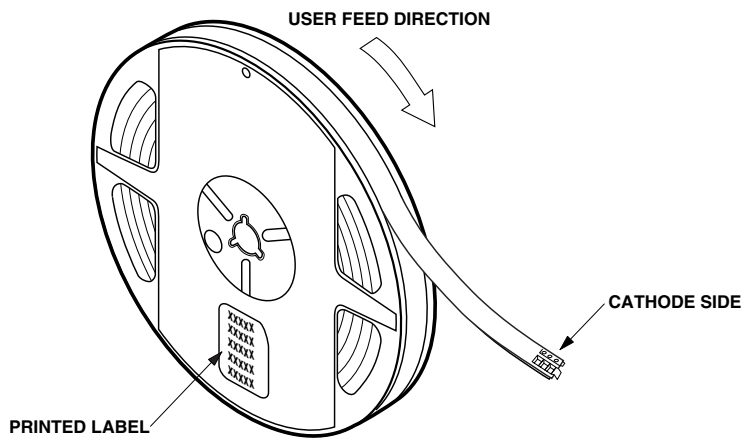


Figure 14. Reeling orientation.

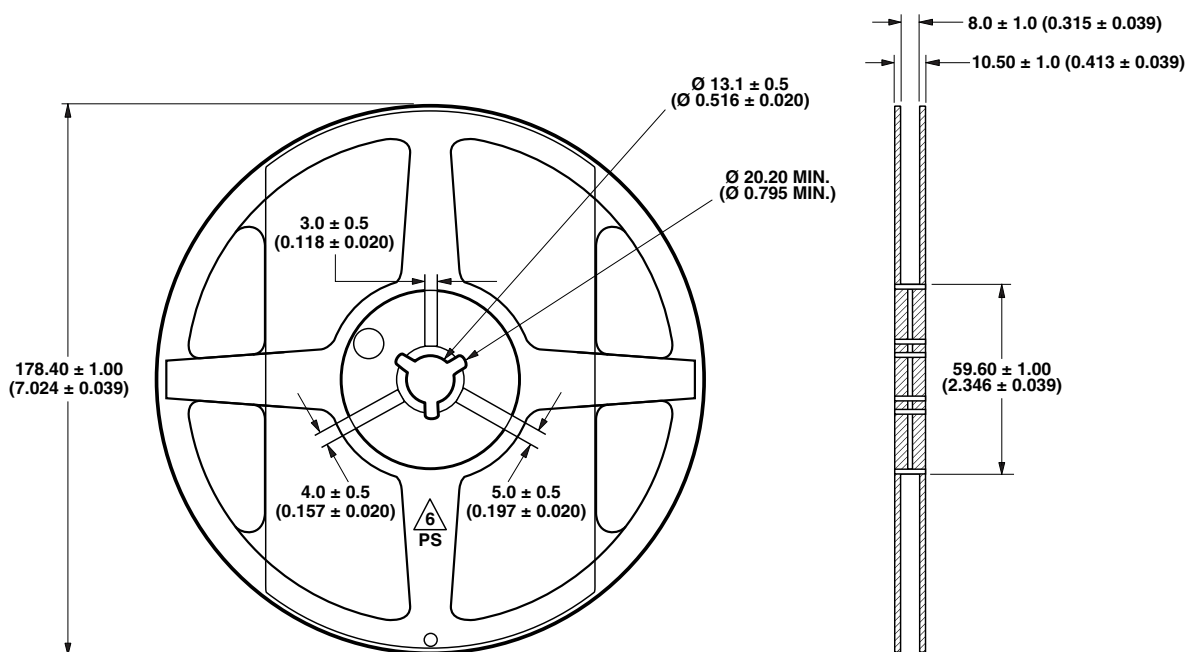


Figure 15. Reel dimensions.

Note:

1. All dimensions in millimeters (inches).

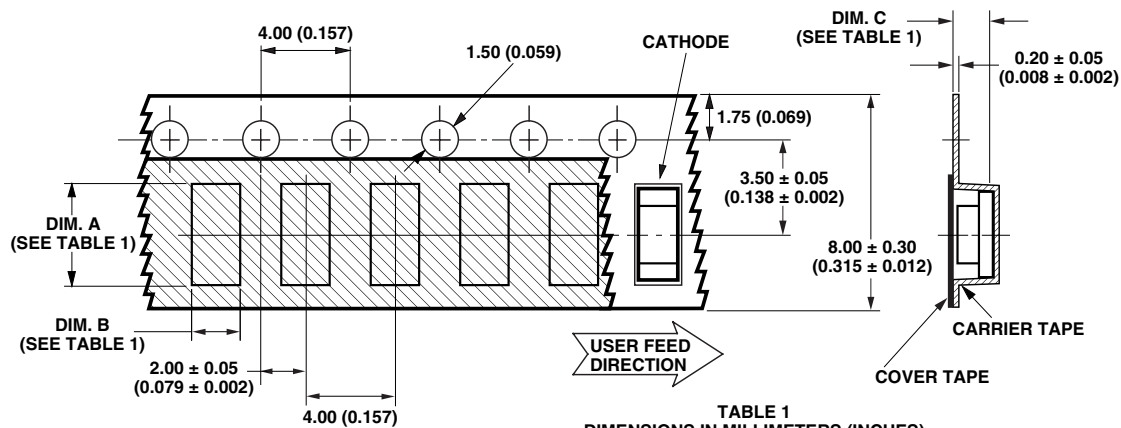


TABLE 1  
DIMENSIONS IN MILLIMETERS (INCHES)

| PART NUMBER      | DIM. A<br>± 0.10 (± 0.004) | DIM. B<br>± 0.10 (± 0.004) | DIM. C<br>± 0.10 (± 0.004) |
|------------------|----------------------------|----------------------------|----------------------------|
| HSMx-C191 SERIES | 1.86 (0.073)               | 0.89 (0.035)               | 0.87 (0.034)               |
| HSMx-C190 SERIES | 1.75 (0.069)               | 0.90 (0.035)               | 0.90 (0.035)               |
| HSMx-C170 SERIES | 2.30 (0.091)               | 1.45 (0.057)               | 0.95 (0.037)               |
| HSMx-C110 SERIES | 3.40 (0.134)               | 1.70 (0.067)               | 1.20 (0.047)               |
| HSMx-C150 SERIES | 3.50 (0.138)               | 1.88 (0.074)               | 1.27 (0.050)               |
| HSMx-C120 SERIES | 1.90 (0.075)               | 1.15 (0.045)               | 0.80 (0.031)               |
| HSMx-C197 SERIES | 1.75 (0.069)               | 0.95 (0.037)               | 0.60 (0.024)               |
| HSMx-C177 SERIES | 2.30 (0.091)               | 1.40 (0.055)               | 0.60 (0.024)               |

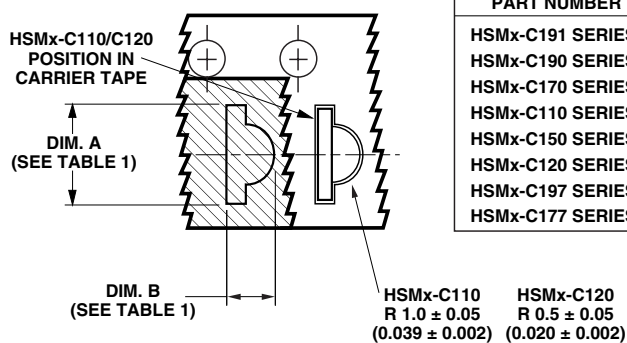


TABLE 1  
DIMENSIONS IN MILLIMETERS (INCHES)

| PART NUMBER      | DIM. A<br>± 0.10 (± 0.004) | DIM. B<br>± 0.10 (± 0.004) | DIM. C<br>± 0.10 (± 0.004) |
|------------------|----------------------------|----------------------------|----------------------------|
| HSMx-C265 SERIES | 3.70 (0.146)               | 1.45 (0.057)               | 1.30 (0.051)               |

Figure 16. Tape dimensions.

Notes:

1. All dimensions in millimeters (inches).
2. Tolerance is ± 0.1 mm (± 0.004 In.) unless otherwise specified.

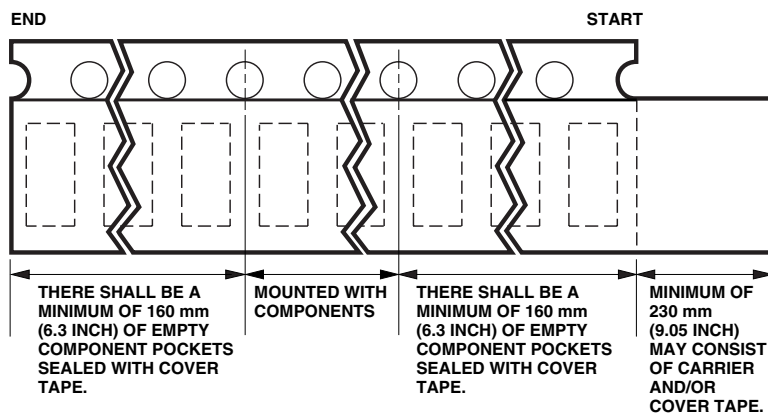


Figure 17. Tape leader and trailer dimensions.

## Convective IR Reflow Soldering

For more information on soldering, refer to Application Note 1060, *Surface Mounting SMT LED Indicator Components*.

## Storage Condition: 5 to 30°C @ 60% RH max.

Baking is required under the condition:

- Humidity Indicator Card is >10% when read at  $23 \pm 5^\circ\text{C}$
- Device exposed to factory conditions <30°C/60% RH more than 672 hours.

Baking recommended condition:  $60 \pm 5^\circ\text{C}$  for 20 hours.

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2010 Avago Technologies. All rights reserved.  
AV02-0976EN - May 10, 2010

**Avago**  
TECHNOLOGIES

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Broadcom Limited:

[HSME-C150](#) [HSME-C197](#) [HSME-C120](#) [HSME-C265](#)