

# Central<sup>TM</sup> Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA  
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

2N3500  
2N3501

NPN SILICON TRANSISTOR

JEDEC TO-39 CASE

## DESCRIPTION

The CENTRAL SEMICONDUCTOR 2N3500 and 2N3501 types are Silicon NPN Epitaxial Planar Transistors designed for high voltage inductive load switching applications.

## MAXIMUM RATINGS (T<sub>A</sub>=25°C)

	SYMBOL		UNITS
Collector-Base Voltage	V <sub>CBO</sub>	150	V
Collector-Emitter Voltage	V <sub>CEO</sub>	150	V
Emitter-Base Voltage	V <sub>EBO</sub>	6.0	V
Collector Current	I <sub>C</sub>	300	mA
Power Dissipation	P <sub>D</sub>	1.0	W
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>	5.0	W
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +200	°C
Thermal Resistance	Θ <sub>JA</sub>	175	°C/W
Thermal Resistance	Θ <sub>JC</sub>	35	°C/W

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I <sub>CBO</sub>	V <sub>CB</sub> =75V		50	nA
I <sub>CBO</sub>	V <sub>CB</sub> =75V, T <sub>A</sub> =150°C		50	μA
I <sub>EBO</sub>	V <sub>EB</sub> =4.0V		25	nA
BV <sub>CBO</sub>	I <sub>C</sub> =10μA	150		V
BV <sub>CEO</sub>	I <sub>C</sub> =10mA	150		V
BV <sub>EBO</sub>	I <sub>E</sub> =10μA	6.0		V
V <sub>CE</sub> (SAT)	I <sub>C</sub> =10mA, I <sub>B</sub> =1.0mA		0.2	V
V <sub>CE</sub> (SAT)	I <sub>C</sub> =50mA, I <sub>B</sub> =5.0mA		0.25	V
V <sub>CE</sub> (SAT)	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA		0.4	V
V <sub>BE</sub> (SAT)	I <sub>C</sub> =10mA, I <sub>B</sub> =1.0mA		0.8	V
V <sub>BE</sub> (SAT)	I <sub>C</sub> =50mA, I <sub>B</sub> =5.0mA		0.9	V
V <sub>BE</sub> (SAT)	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA		1.2	V

(Continued on Reverse Side)

# ELECTRICAL CHARACTERISTICS (Continued)


2N3500

2N3501

<u>SYMBOL</u>	<u>TEST CONDITIONS</u>	<u>MIN</u>	<u>MAX</u>	<u>MIN</u>	<u>MAX</u>	<u>UNITS</u>
$h_{FE}$	$V_{CE}=10V, I_C=0.1mA$	20		35		
$h_{FE}$	$V_{CE}=10V, I_C=1.0mA$	25		50		
$h_{FE}$	$V_{CE}=10V, I_C=10mA$	35		75		
$h_{FE}$	$V_{CE}=10V, I_C=150mA$	40	120	100	300	
$h_{FE}$	$V_{CE}=10V, I_C=300mA$	15		20		
$f_T$	$V_{CE}=20V, I_C=20mA, f=100MHz$	150		150		MHz
$C_{ob}$	$V_{CB}=10V, I_E=0, f=100kHz$		8.0		8.0	pF
$C_{ib}$	$V_{EB}=0.5V, I_C=0, f=100kHz$		80		80	pF
$t_d$	$V_{CC}=100V, I_C=150mA, I_{B1}=15mA$	20 TYP		20 TYP		ns
$t_r$	$V_{CC}=100V, I_C=150mA, I_{B1}=15mA$	35 TYP		35 TYP		ns
$t_s$	$V_{CC}=100V, I_C=150mA, I_{B1}=I_{B2}=15mA$	800 TYP		800 TYP		ns
$t_f$	$V_{CC}=100V, I_C=150mA, I_{B1}=I_{B2}=15mA$	80 TYP		80 TYP		ns

## JEDEC TO-39 CASE - MECHANICAL OUTLINE

All Dimensions in Inches (mm).

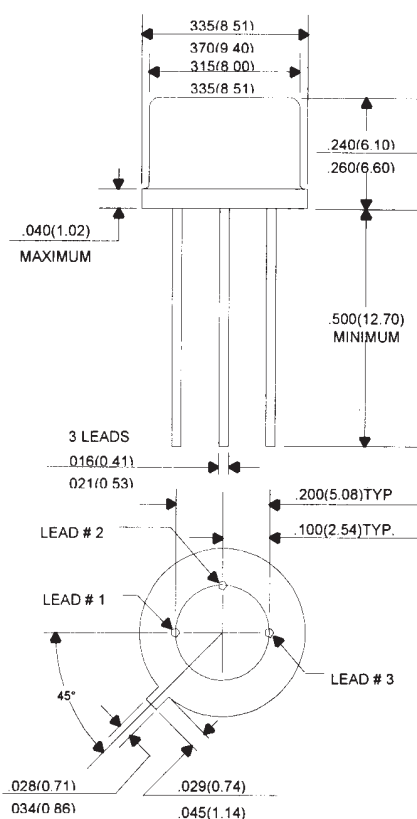

Lead Code:

- 1) Emitter
- 2) Base
- 3) Collector

**Central**  
Semiconductor Corp.

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[2N3501 TIN/LEAD](#)