

CTLZ3V9 THRU CTLZ8V2**SURFACE MOUNT SILICON
ZENER DIODES****TLP™**
Tiny
Leadless
Package

Top View Bottom View

TLM2D3D6 CASE**FEATURES:**

- Ultra small, ultra low profile
0.3mm x 0.6mm x 0.3mm TLP™ leadless
surface mount package.

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

SYMBOL P_D T_J, T_{stg}

100

-55 to +150

UNITS

mW

 $^{\circ}\text{C}$ **ELECTRICAL CHARACTERISTICS:** ($T_A=25^{\circ}\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE			TEST CURRENT	MAXIMUM REVERSE LEAKAGE CURRENT		MARKING CODE
	V _Z @ I _{ZT}			I _{ZT}	I _R @ V _R		
	MIN V	NOM V	MAX V	mA	μA	V	
CTLZ3V9	3.74	3.9	4.16	5.0	5.0	1.0	F
CTLZ4V7	4.42	4.7	4.90	5.0	2.0	1.0	H
CTLZ5V1	4.84	5.1	5.37	5.0	2.0	1.5	K
CTLZ5V6	5.31	5.6	5.92	5.0	1.0	2.5	L
CTLZ6V2	5.86	6.2	6.53	5.0	1.0	3.0	N
CTLZ6V8	6.47	6.8	7.14	5.0	0.5	3.5	P
CTLZ7V5	7.06	7.5	7.84	5.0	0.5	4.0	T
CTLZ8V2	7.76	8.2	8.64	5.0	0.5	5.0	U

www.centrasemi.com**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CTLZ3V9 thru CTLZ8V2 silicon Zener diodes are high quality voltage regulators, each packaged in the ultra small, ultra low profile TLM2D3D6 leadless surface mount case.

**MARKING CODE: SEE MARKING CODES ON
ELECTRICAL CHARACTERISTICS TABLE****APPLICATIONS:**




- Reference voltage
- Voltage regulation
- Over-voltage protection
- Medical electronics
- Handheld devices such as mobile
phones and MP3 players.

CTLZ3V9 THRU CTLZ8V2

SURFACE MOUNT SILICON
ZENER DIODES



TLM2D3D6 CASE - MECHANICAL OUTLINE

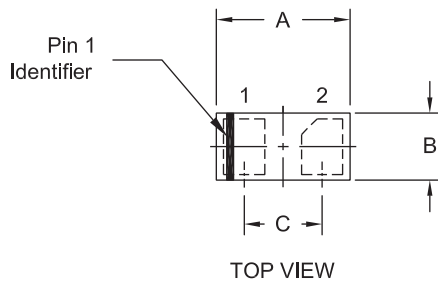

R2

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.022	0.026	0.55	0.65
B	0.010	0.014	0.25	0.35
C	0.014		0.35	
D	0.000	0.002	0.00	0.05
E	0.011	0.013	0.28	0.32
F	0.008	0.012	0.20	0.30
G	0.005	0.009	0.13	0.24

TLM2D3D6 (REV: R2)

LEAD CODE:

- 1) Cathode
- 2) Anode

MARKING CODE: SEE MARKING CODES ON
ELECTRICAL CHARACTERISTICS TABLE

R0 (23-October 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[CTLZ6V8 TR PBFREE](#)