MPSA75 MPSA76 MPSA77

# SILICON PNP DARLINGTON TRANSISTORS




www.centralsemi.com

# **DESCRIPTION:**

The CENTRAL SEMICONDUCTOR MPSA75 series devices are silicon PNP Darlington transistors, manufactured by the epitaxial planar process, designed for applications requiring extremely high gain.

MARKING: FULL PART NUMBER




Collector-Base Collector-Em Emitter-Base Continuous C Power Dissip	itter Voltage Voltage Collector Current	V <sub>C</sub> V <sub>C</sub> V <sub>E</sub> I	IBOL CES EBO C C	MPSA75 40 40	50 50 10 500 625 -65 to +15		PSA77 60 60	UNITS V V V mA mW °C
Thermal Res	istance	Θ	JA		200			°C/W
ELECTRICA SYMBOL ICBO	L CHARACTERISTICS: (T <sub>A</sub> =25°C) TEST CONDITIONS V <sub>CB</sub> =30V	MPS MIN	SA75 MAX 100	MPS MIN	A76 MAX	MPS MIN	SA77 MAX	UNITS nA
I <sub>CBO</sub>	V <sub>CB</sub> =40V	_	-	-	100	_	_	nA
ICBO	V <sub>CB</sub> =50V	-	-	-	-	-	100	nA
ICES	V <sub>CE</sub> =30V	-	500	-	-	-	-	nA
I <sub>CES</sub>	V <sub>CB</sub> =40V	-	-	-	500	-	-	nA
ICES	V <sub>CB</sub> =50V	-	-	-	-	-	500	nA
I <sub>EBO</sub>	V <sub>EB</sub> =10V	-	100	-	100	-	100	nA
BV <sub>CBO</sub>	I <sub>C</sub> =100μA	40	-	50	-	60	-	V
BVCES	I <sub>C</sub> =100μA	40	-	50	-	60	-	V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =100mA, I <sub>B</sub> =0.1mA	-	1.5	-	1.5	-	1.5	V
V <sub>BE(ON)</sub>	$V_{CE}$ =5.0V, $I_{B}$ =100mA	-	2.0	-	2.0	-	2.0	V
hFE	$V_{CE}$ =5.0V, $I_{C}$ =10mA	10K	-	10K	-	10K	-	
h <sub>FE</sub>	$V_{CE}$ =5.0V, $I_{C}$ =100mA	10K	-	10K	-	10K	-	
$f_{T}$	$V_{CE}$ =5.0V, $I_{C}$ =10mA	125	-	125	-	125	-	MHz

MPSA75 MPSA76 MPSA77





## **TO-92 CASE - MECHANICAL OUTLINE**

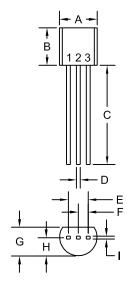

DIMENSIONS								
	INCHES		MILLIMETERS					
SYMBOL	MIN	MAX	MIN	MAX				
A (DIA)	0.175 0.205		4.45	5.21				
В	B 0.170		4.32	5.33				
С	0.500	-	12.70	-				
D	0.016	0.022	0.41	0.56				
Е	0.1	100	2.54					
F	0.0	)50	1.27					
G	0.125	0.165	3.18	4.19				
Н	0.080	0.105	2.03	2.67				
	0.0	)15	0.38					

TO-92 (REV: R1)

## LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

## MARKING:

R1


**FULL PART NUMBER** 

MPSA75 MPSA76 MPSA77





## TYPICAL ELECTRICAL CHARACTERISTICS

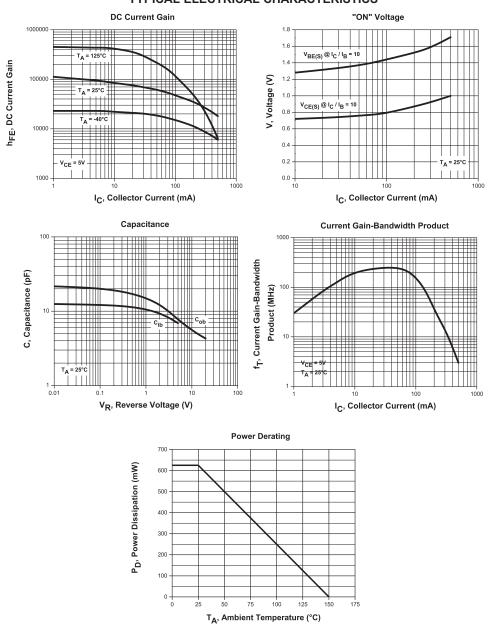

### **OUTSTANDING SUPPORT AND SUPERIOR SERVICES**



#### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

#### **DESIGNER SUPPORT/SERVICES**

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- · Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

#### REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

#### **CONTACT US**

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: <a href="https://www.centralsemi.com/wwreps">www.centralsemi.com/wwreps</a>

**Worldwide Distributors:** 

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: <a href="https://www.centralsemi.com/terms">www.centralsemi.com/terms</a>

www.centralsemi.com (001)

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor: MPSA77 TRA TIN/LEAD