




**BOTTOM VIEW**

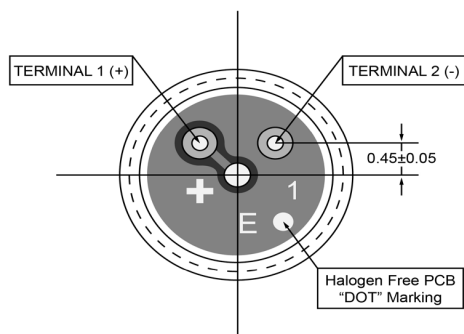


**SIDE VIEW**

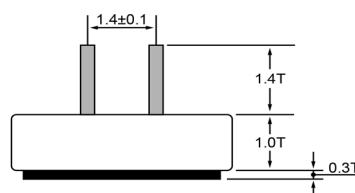

**ANGLED VIEW**

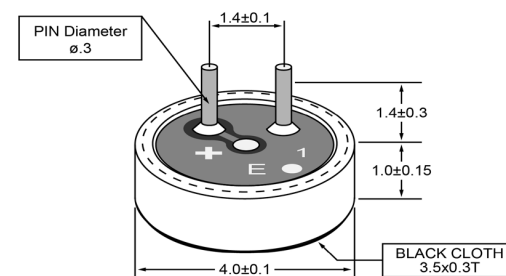

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date		Approved	
Directivity	Omnidirectional		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013		J.S	
Technology	Electret Condenser									
Sensitivity	-44	(dB)								
Frequency Range	40 ~ 20,000	(Hz)								
Rated Voltage	2	(V)								
Output Impedance	2,200	(Ohm)								
Connection Method	PC Pins									
Voltage Range	1 ~ 10	(V)								
Max Rated Current	0.45	(mA)								
Minimum Signal to Noise Ratio	>60	(dB)								
Operating Temperature	-40 ~ +85	°C	 DB UNLIMITED	Drawn by	Date	Checked by	Date	Approved by	Date	
Storage Temperature	-40 ~ +85	°C		A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013	
				Electret Condenser Microphone			MO044402-3			

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[MO044402-3](#)