





DB UNLIMITED

Part Number:	DRAWN	4/21/2017
	CJ	
	CHECKED	4/21/2017
Description:	P.D.	
	APPROVED	4/21/2017
	C.E.	
This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com		


Top View

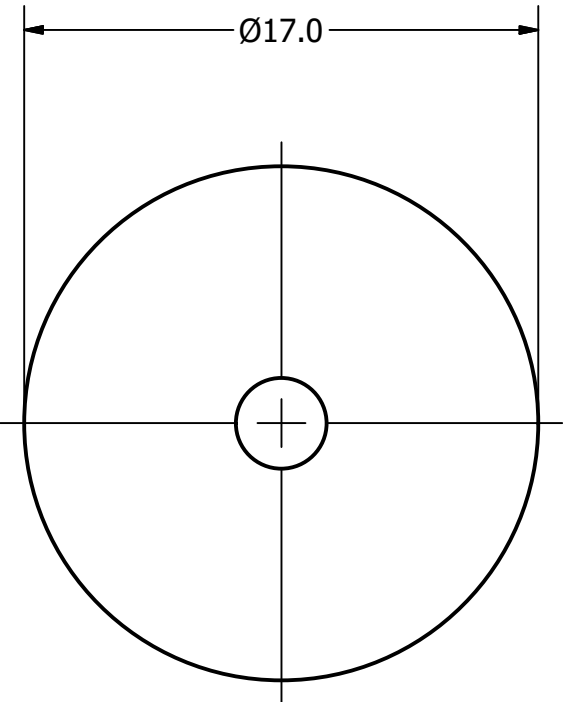

Side View

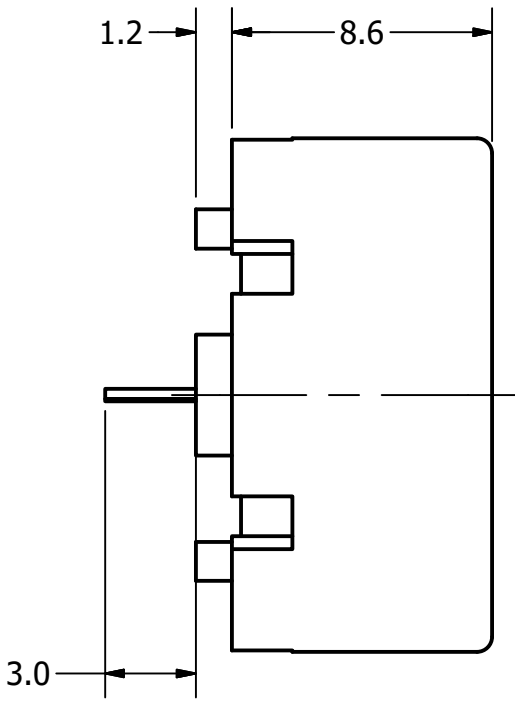

Bottom View

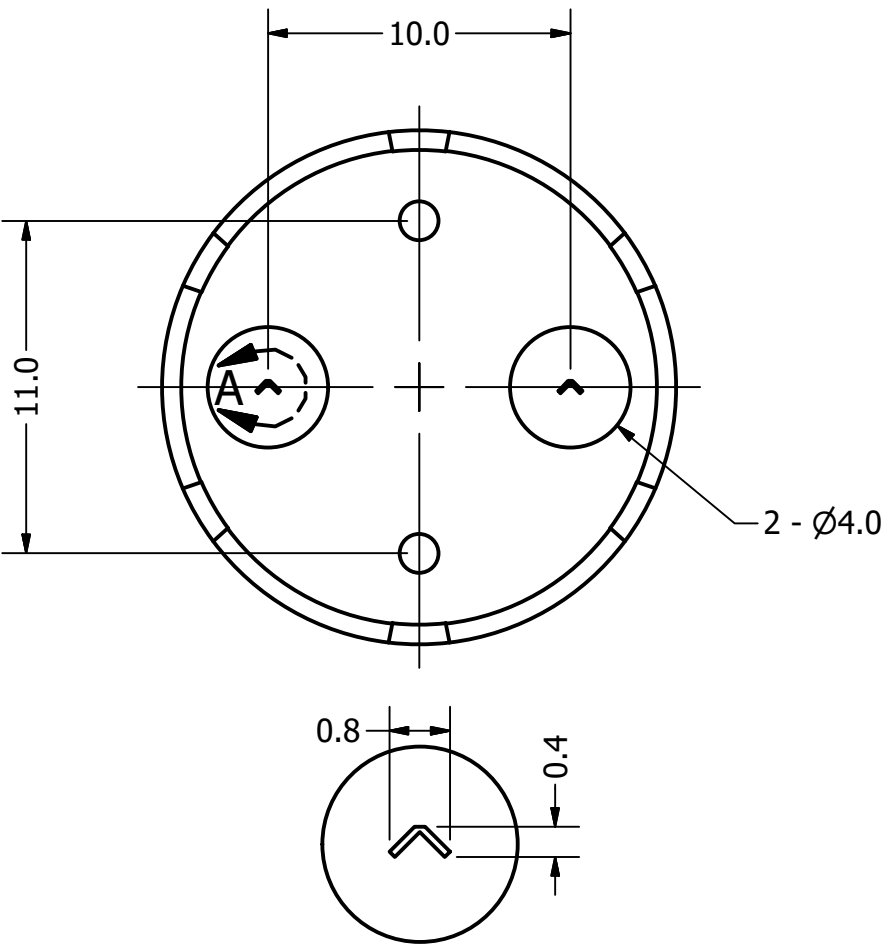

DETAIL A
SCALE 10 : 1

Items	Specifications	Conditions				
Sound Pressure Level	>=78	dB (@ 10cm)				
Resonant Frequency	2,000	Hz				
Rated Voltage	9	Vp-p				
Voltage Range	1 ~ 25	V				
Capacitance	25,000	pF				
Max. Rated Current	7	mA				
Storage Temperature	-40 ~ +85	°C				
Operating Temperature	-40 ~ +85	°C				
Connection Method	PC Pins					
Mount Type	Thru Hole					
Housing Material	NORYL					
Weight	1	g				
			REVISION HISTORY			
			REV	DESCRIPTION	DATE	APPROVED
				Released from Engineering	10/21/2013	J.S.
			1	Update operating temp, new drawing template	4/24/2017	C.E.
			NOTES			
			1) All dimensions are in mm unless otherwise noted			
			2) All tolerances are ± 0.5 mm unless otherwise noted			
			3) All parts meet RoHS			
			4) Subject to change or redrawn without notice			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DB Unlimited:](#)

[TP172009-1](#)