

- Fully encapsulated DIP-24 package
- 3000 VAC I/O isolation (reinforced)
- 4:1 input voltage range: 36 – 160 VDC
- EN 50155 and EN 61373 certified
- Internal class A EMI filter
- -40°C up to +95°C without derating
- EN 45545-2 fire behavior
- Remote on/off function
- Undervoltage lockout (UVLO), short-circuit protection (SCP), and overvoltage protection (OVP)
- 3-year product warranty



The TEN 3WIRH is a series of railway-certified DC/DC converters with reinforced I/O isolation for highest reliability in harsh environments. The proven and certified design guarantees highest resistance against thermal shocks, moisture, mechanical shocks, and vibration. The TEN 3WIRH comes with additional EN 62368-1 safety approvals for IT equipment and EN 45545-2 certification for fire behavior. Thanks to its favorable operating temperature range of -40°C to +95°C without derating (depending on the model), the TEN 3WIRH presents a first choice for demanding applications.

Models

Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEN 3-11010WIRH	36 - 160 VDC (110 VDC nom.)	3.3 VDC	1'000 mA			80 %
TEN 3-11011WIRH		5 VDC	600 mA			82 %
TEN 3-11012WIRH		12 VDC	250 mA			85 %
TEN 3-11013WIRH		15 VDC	200 mA			84 %
TEN 3-11015WIRH		24 VDC	125 mA			85 %
TEN 3-11021WIRH		+5 VDC	300 mA	-5 VDC	300 mA	81 %
TEN 3-11022WIRH		+12 VDC	125 mA	-12 VDC	125 mA	84 %
TEN 3-11023WIRH		+15 VDC	100 mA	-15 VDC	100 mA	85 %

Options

on demand (backorder with MOQ non stocking item)	- Optional models with adjustable output voltage
---	--

Transient Response	- Peak Variation	125 mV typ. / 160 mV max. (75% to 100% Load Step)
	- Response Time	250 µs typ. / 300 µs max. (75% to 100% Load Step)

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Railway Applications	EN 50155
	- Certification Documents	www.tracopower.com/overview/ten3wirh
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI (Emissions)		EN 50121-3-2 (EMC for Rolling Stock)
	- Conducted Emissions	EN 55032 class A (internal filter) EN 55032 class B (with external filter)
	- Radiated Emissions	EN 55032 class A (internal filter) EN 55032 class B (with external filter)
		External filter proposal: www.tracopower.com/overview/ten3wirh
EMS (Immunity)		EN 50121-3-2 (EMC for Rolling Stock)
		EN 55024 (IT Equipment)
		EN 55035 (Multimedia)
	- Electrostatic Discharge	Air: EN 61000-4-2, ±8 kV, perf. criteria A
		Contact: EN 61000-4-2, ±6 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A
		EN 61000-4-5, ±2 kV, perf. criteria A
		Ext. input component: 2x 220 µF, 200 V, KXJ SMBJ220A
	- Conducted RF Disturbances	EN 61000-4-6, 10 Vrms, perf. criteria A
EMC / Environmental	- PF Magnetic Field	Continuous: EN 61000-4-8, 100 A/m, perf. criteria A
		1 s: EN 61000-4-8, 1000 A/m, perf. criteria A
	- Certification Documents	www.tracopower.com/overview/ten3wirh

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +95°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	Depending on model
		See application note: www.tracopower.com/overview/ten3wirh
Cooling System		Natural convection (20 LFM)
Remote Control	- Voltage Controlled Remote (passive = on)	On: 3.0 to 12 VDC or open circuit Off: 0 to 1.2 VDC or short circuit Refers to 'Remote' and '-Vin' Pin
		2.5 mA typ. / 3 mA max.
	- Off Idle Input Current	
Altitude During Operation		5'000 m max.
Regulator Topology		Flyback Converter
Switching Frequency		215 - 265 kHz (PWM)
		240 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		189 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC
	- Input to Case, 60 s	3'000 VAC
	- Output to Case, 60 s	2'000 VAC

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Creepage	- Input to Output	4.5 mm min.
Clearance	- Input to Output	4.5 mm min.
Isolation Resistance	- Input to Output, 500 VDC	1'000 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	650 pF typ. 1'000 pF max.
Reliability	- Calculated MTBF	5'069'000 h (MIL-HDBK-217F, ground benign)
Washing Process		According to Cleaning Guideline www.tracopower.com/info/cleaning.pdf
Environment	- Vibration - Mechanical Shock - Thermal Shock - Flammability	MIL-STD-810F EN 61373 MIL-STD-810F EN 61373 MIL-STD-810F EN 45545-2 www.tracopower.com/info/en45545-declaration.pdf
Housing Material		Non-conductive Plastic (UL 94 V-0 rated)
Base Material		Non-conductive Plastic (UL 94 V-0 rated)
Potting Material		Silicone (UL 94 V-0 rated)
Pin Material		Tinned Copper
Pin Foundation Plating		Nickel (2 - 3 µm)
Pin Surface Plating		Tin (3 - 5 µm), matte
Housing Type		Plastic Case
Mounting Type		PCB Mount
Connection Type		THD (Through-Hole Device)
Footprint Type		DIP24
Soldering Profile		Lead-Free Wave Soldering 260°C / 6 s max.
Weight		14 g
Thermal Impedance	- Case to Ambient	19.2 K/W typ.
Environmental Compliance	- REACH Declaration - RoHS Declaration - SCIP Reference Number	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) f11ec6f9-b3d0-4ad2-8bb6-3aca7f2b20e6


Supporting Documents

Overview Link (for additional Documents)


www.tracopower.com/overview/ten3wirh

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

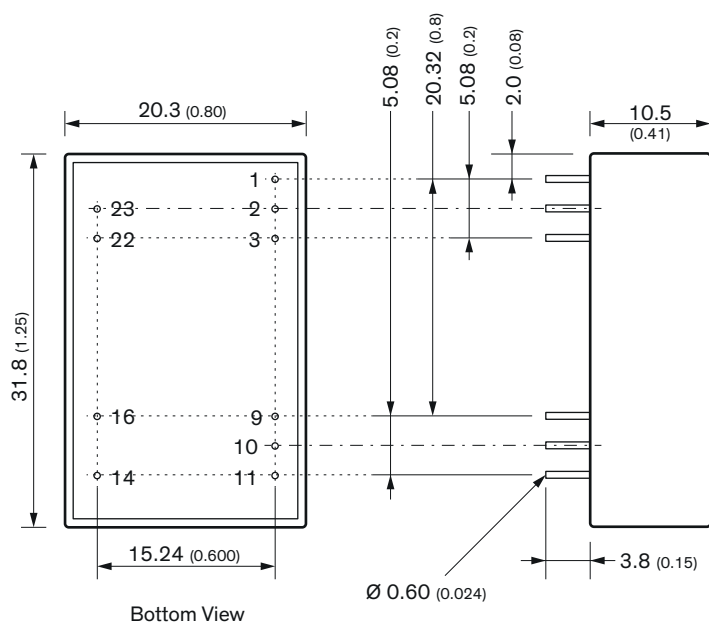

All dimension in mm (inch)
Tolerance: X.X ± 0.5 (X.XX ± 0.02)
X.XX ± 0.25 (X.XXX ± 0.010)
Pin dimension tolerance ± 0.10 (± 0.004)



Pinout		
Pin	Single	Dual
1	Remote On/Off	
2	-Vin	
3	-Vin	
9	NC	Common
10	No pin / Trim (option)	
11	NC	-Vout
14	+Vout	
16	-Vout	Common
22	+Vin	
23	+Vin	

NC: Not connected

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TRACO Power:](#)

[TEN 3-11010WIRH](#) [TEN 3-11011WIRH](#) [TEN 3-11012WIRH](#) [TEN 3-11013WIRH](#) [TEN 3-11015WIRH](#) [TEN 3-11021WIRH](#) [TEN 3-11022WIRH](#) [TEN 3-11023WIRH](#)